


Overview



Components

Panel thickness:	1 1/16"
Individual Panel Width:	Solid louver up to 34" Laminated louver up to 44"
Panel Height:	122" (up to 190" available)
Top ¹ /Bottom ² Rails:	15/16" thick, 3" minimum
Divider Rail ³ :	15/16" thick, 2", 3", 4" and 5" wide. Recommended on panels over 68", required on panels over 84"
Stile ⁴ :	Standard 2 1/4" wide, 1 1/16" thick
Louver ⁵ :	Elliptical at 1 1/4", 1 7/8", 2 1/2", 3 1/2", 4 1/2" and 5 1/2"
Tension System ⁶ :	Adjustable screw
Hinge Mortise ⁷ :	Machined by factory for 2 1/2" or 3" hinges
Tilt Rod ⁸ :	5/8" thick by 1/2" wide

Standard Finishing

Standard finishing for both stain and painted shutters is an acrylic lacquer. Variations can occur within standard colors. If a specific sample of a standard stain or paint chip is the color desired, submit it for a custom match. A custom color match will be sent by factory for customer approval.

Custom Finishing

All Stain and Wash Grade Orders:	Add 18% to panel price
Stain Match:	Add \$95 per match
Paint Match:	Add \$85 per match
Dark Paint Match:	Add \$125 per match, plus 20% to panel price
Unfinished:	Deduct 18% from panel price
High Gloss:	Add 20% to panel price
Acrylic Lacquer (water base):	Standard Finish


Hardware

Net Panel Height	Number of Hinges
Up to 40"	2 hinges per panel
40 1/16" to 75"	3 hinges per panel
75 1/16" to 122"	4 hinges per panel

Paint matches should be submitted on San Benito Shutter wax cards or a paint manufacturer's color chip. Paint manufacturer names and numbers are not acceptable. Paint samples should be a minimum of five square inches and stain samples a minimum of fifteen square inches. Orders with custom colors will be released into production upon receipt of color approval.

Louver Projection

When fully open, louvers project behind the back of the panel. This projection must be taken into consideration at time of measure to ensure that louvers have enough clearance to avoid hitting casing, cranks, glass, wall, etc. Louvers project behind back of panel as follows:

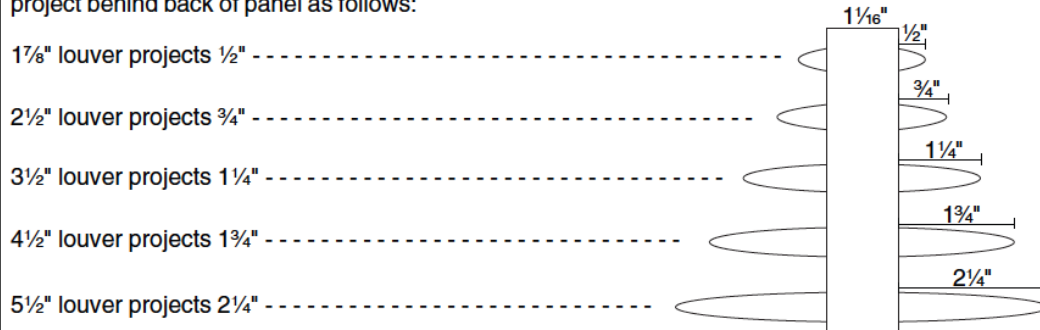

Note: An additional 1/8" louver clearance is required to accommodate Hidden Rear Tilt Rod option.