



XP16000iH

DUAL FUEL DIGITAL INVERTER

16,000 STARTING WATTS • 13,000 RUNNING WATTS



FEATURING CO ALERT TECHNOLOGY





XP16000iH

DUAL FUEL DIGITAL INVERTER


FEATURES

- Clean Power
- Remote Start
- 2 50 Amp Outlets
- Easy to Transport
- Dual Fuel Technology
- Digital Control Center
- All Copper Windings
- Runs Quietly (66.9 dB)



CO ALERT TECHNOLOGY

OUTLETS

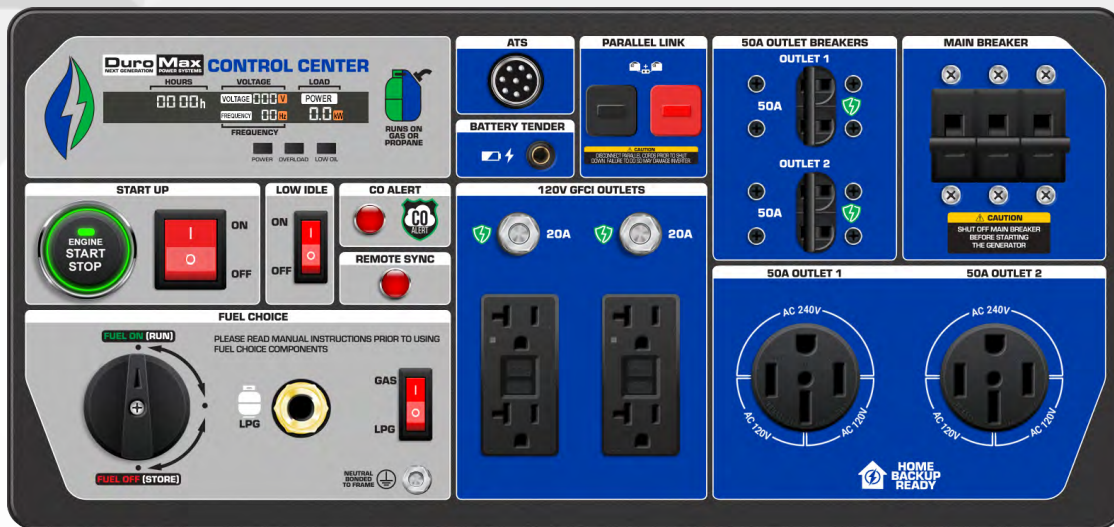

SPECS

Watts (Gasoline)	16,000 (peak) • 13,000 (running)
Watts (Propane)	15,200 (peak) • 12,350 (running)
Engine	OHV 744cc
Amperage	108.33A (120v) / 54.16A (240v)
Voltage	120V / 240 Volts
Fuel Type	Gasoline / Propane
Runtime (Gasoline) at 50% Load	10.5 hrs
Runtime (Propane) at 50% Load on 40/60/100 lb. Tank	6 hrs / 9.4 hrs / 14.5 hrs