

Automatic Transfer Switches

Integrated Meter Transfer Switch with Load Center Service Entrance Rated

1 of 3

200 Amps, Single Phase
RXGUW200A3



*Assembled in the USA using domestic and foreign parts

Description

The RXGUW integrated meter transfer switch with load center combines the automatic transfer switch, the meter socket, and a 42-circuit load center, saving installation time and labor. The all-in-one design meets NEC® emergency disconnect requirements and reduces overall clutter on the home's exterior for a cleaner, more appealing aesthetic.

The open transition type transfer switch is designed for use with single phase generators using an Evolution™ or Nexus™ controller in optional standby applications. A 4 jaw meter socket, ringless type cover, and horn bypass come standard. Optional accessories, such as ring type covers and 5th jaws, are available to meet local requirements.

The RXGUW transfer switches are housed in an aluminum NEMA/ETL Type 3R enclosure suitable for either outdoor or indoor installation. The Heavy Duty Generac Contactor is an ETL recognized device, designed for years of service. All switches are covered by a 5 year limited warranty.

Intelligent Load Management

Each switch comes standard with a Smart A/C Management module (SACM) to manage up to 4 individual HVAC (24 VAC controlled) loads with no additional hardware. When used in tandem with Smart Management Modules (SMM), up to 8 loads can be managed, providing the most installation efficient power management options available.

200 Amps, Single Phase

Integrated Meter Transfer Switch with Load Center

Functions


All timing and sensing functions originate in the generator controller.

Utility Voltage Drop-out	<65%
Timer to Generator Start	10 Second Factory Set, Adjustable Between 2 - 1,500 Seconds by a Qualified Dealer*
Engine Warmup Delay	5 Seconds
Standby Voltage Sensor	65% for 5 Seconds
Utility Voltage Pickup	>80%
Re-transfer Time Delay	15 Seconds
Engine Cooldown Timer	60 Seconds
Exerciser	Nexus™: 12 Minutes Weekly Evolution™: 5 to 12 Minutes Adjustable, Weekly/Bi-weekly/Monthly
The Transfer Switch can be Operated Manually Without Power Applied	

* When used in conjunction with units utilizing Evolution™ controls

Specifications

Model	RXGUW200A3
Amps	200
Voltage	120/240, 1ø
Load Transition Type (Automatic)	Open Transition Service Rated
Enclosure Type	NEMA 3R
ETL Rating	ETL
Withstand Rating (Amps)	22,000
Lug Range	350 MCM - #6

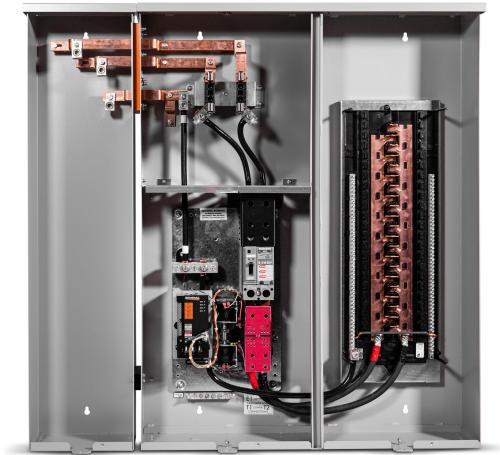

Accessories

Accessory	Description
G0074010 Ring Style Meter Cover	Replacement outer top cover and sealing ring for ring style meter retainment. Verify you have the proper type to meet local code requirements.
G0074020 Fifth Jaw Metering Kit	Includes all pieces necessary to perform conversion of the standard Four Jaw Meter Socket into a Five Jaw Meter Socket. Verify you have the proper type to meet local code requirements.


200 Amps, Single Phase

Integrated Meter Transfer Switch with Load Center

Dimensions

Model		RXGUW200A3
Height - in (cm)	H1	37.8 (96.0)
	H2	42.5 (107.9)
Width - in (cm)	W1	32.6 (82.8)
	W2	43.4 (110.2)
Depth - in (cm)		7.3 (18.5)
Weight - lbs (kg)		49.0 (22.2)

Note: Dimensions are for estimation purposes only.

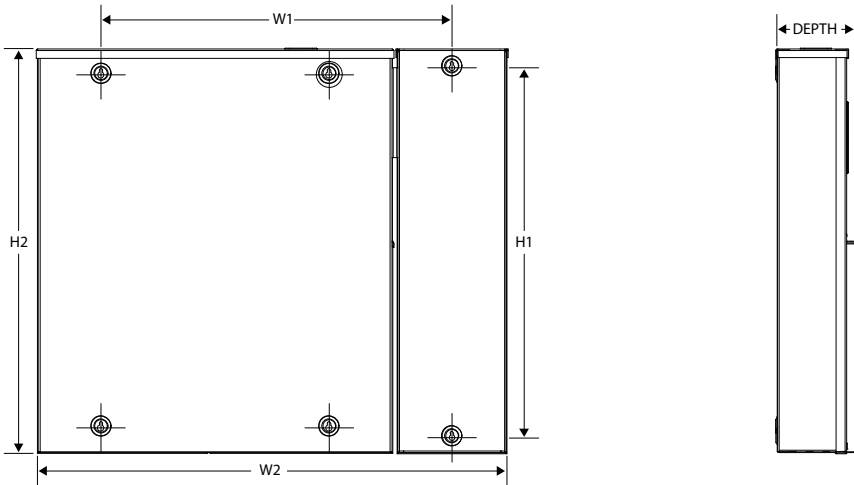

Note: Image shown is backside of unit.