

TOOL REQUIRED


1" 3/16
31mm

TOTAL LENGTH

12"
30,5 cm

CORD LENGTH

12'
3,7 m

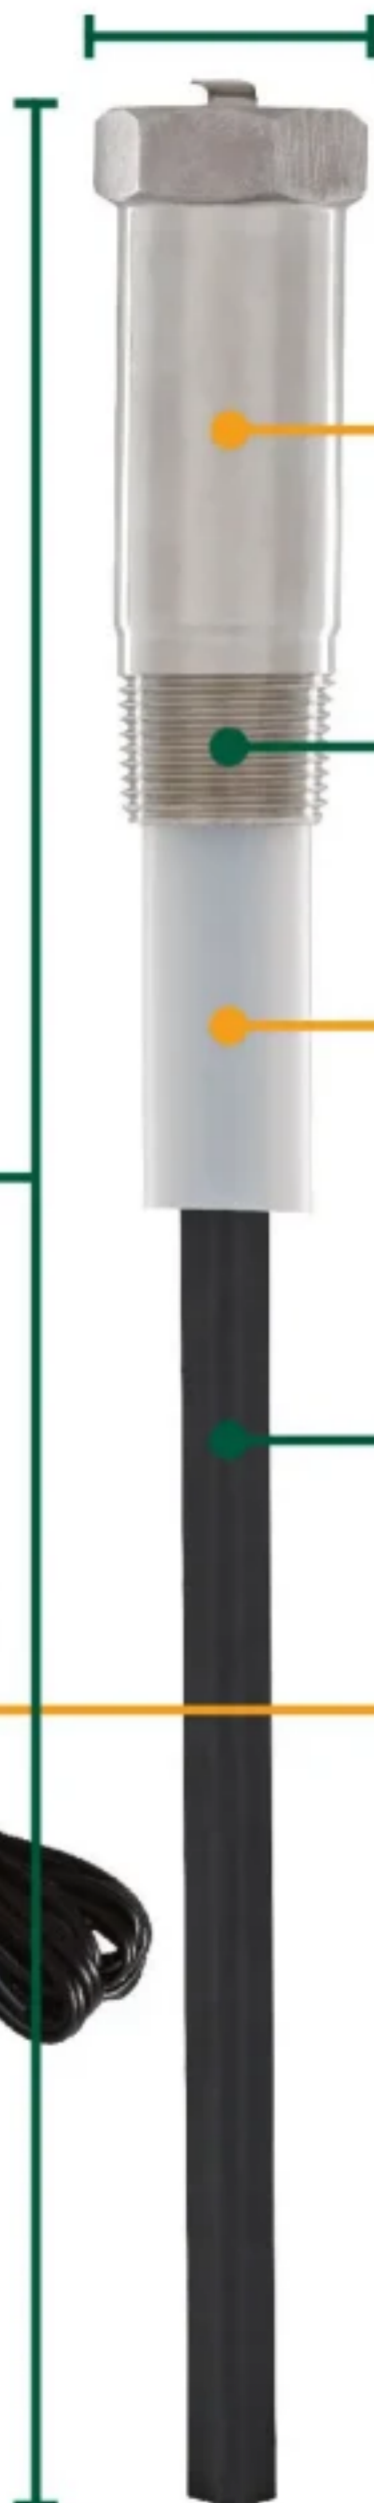

SERIAL NUMBER

A unique serial number on each Corro-Protec ensures better quality control, better tracking and better customer service.

STAINLESS STEEL TUBE

Provide a simple, solid and efficient installation.

HDPE PLASTIC TUBE

This very important piece prevents the accumulation of limescale on the anode. Without this part, an electron transfer too fast is created with the upper part of the tank, which creates limescale. This part does not affect the protection of the tank.

TITANIUM ANODE ROD

The excellent stability of mixed metal oxide (MMO) coated titanium anodes have been used for almost 30 years. Our special coating ensure long-term durability and a higher level of efficiency.

POWER SUPPLY

Designed to send a precise amount of current to ensure adequate cathodic protection and unmatched service life. A green indicator light confirms that your water heater is protected. Thanks to a 12-foot cord, the system is easily plugged into an existing outlet.