



Toll Free: 866-288-2522

SMF - SINTERED METAL FIBER



The SMF series of filtration products provides the ability to achieve high filtration efficiencies from a combination of depth and tortuosity, while at the same time providing exceptional dirt holding capacity and flow characteristics.

Filter efficiency is achieved by the precise selection of fiber diameters and basis weight. The medium's matrix is constructed to control the pore diameter throughout its thickness. This allows us to achieve a graded pore structure that captures the desired larger particles on the outer layers while resulting in a higher dirt holding capacity and subsequent longer on-stream life. The media can also be configured as a surface filter to trap particles on the outer layer if backflush or backpulse regeneration applications are desired.

FEATURES AND BENEFITS

- Heat resistance
- Pleatable and formable

TYPICAL INDUSTRIES SERVED

- Polymer
- Pharmaceutical
- Food and beverage
- Refineries
- Automotive`
- Petrochemical
- Waste water

SPECIFICATIONS

- Standard alloys: 304, 304L, 316, 316L (also available in Inconel 600 and 625, Monel, and Hastalloy upon request).
- Standard sheet sizes: 24" x 48" and 47.5" x 59". Custom sizes available upon request.

Media Designation	Filtration Rating (µm)	Porosity % (+/- 5%)	Thickness (+/- 0.003")		Air Flow L/min/dm ² @ 200 Pa	Air Flow cfm/ft ² @ 0.5" W.C.	Permeability		Dirt Holding Capacity mg/cm ² (+/-20%)	Bubble Point inches of W.C.
			mm	in			m ²	Darcy		
SMF-3	3	65	0.351	0.0138	10	2.0	5.4E-13	0.5	6.3	44.5 - 54.4
SMF-5	5	78	0.338	0.0133	35	7.1	1.8E-12	1.8	5.5	27.5 - 33.6
SMF-10	10	77	0.320	0.0126	100	20.4	4.9E-12	5.0	7.6	13.4 - 16.4
SMF-15	15	78	0.371	0.0146	130	26.5	7.4E-12	7.5	7.9	9.0 - 10.9
SMF-20	20	81	0.490	0.0193	230	46.9	1.7E-11	17.6	12.4	6.7 - 8.2
SMF-25	25	79	0.610	0.0240	330	67.4	3.1E-11	31.3	19.4	5.4 - 6.6
SMF-30	30	90	0.630	0.0248	450	91.9	4.3E-11	44.2	23.0	4.5 - 5.5
SMF-40	40	77	0.660	0.0260	580	118.4	5.9E-11	59.7	25.9	3.4 - 4.1
SMF-60	60	87	0.701	0.0276	1100	224.7	1.2E-10	120.2	34.0	2.3 - 2.8

1. ISO 4022/ASTM D737
2. ISO 16889
3. ISO 4003

Porous Metal Filters, Inc.
 19994 Hickory Twig Way, Spring TX, 77388
 Toll Free: 866-288-2522 Tel: 281-719-1352 Fax: 281-719-1351
www.pmfiler.net sales@pmfilter.net





Toll Free: 866-288-2522


SMF FILTER CARTRIDGES

WHAT SEPARATES A GREAT FILTER MANUFACTURER FROM THE OTHERS?

- Exceptional customer service
- Product quality
- Fast and reliable information
- Professional and positive attitude

We welcome the opportunity to help with your industrial filter needs.

THE PMF SCREEN CODE IS ILLUSTRATED BELOW

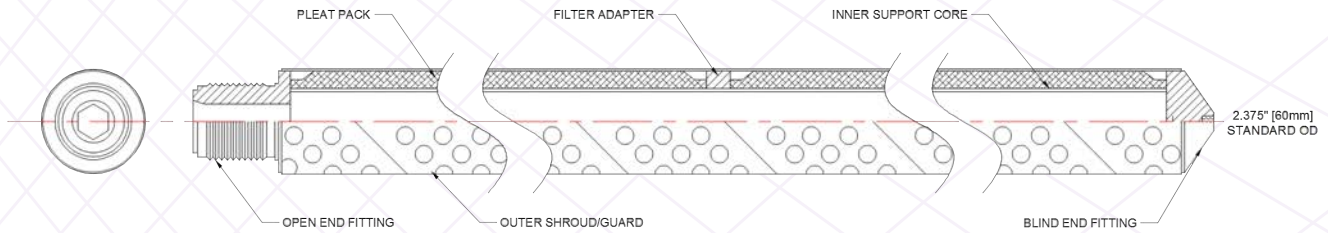

STANDARD CARTRIDGE ORDER CODE

PFC 5 S 10 AF B

316L Media Type

PFC	Sintered Fiber Media, Cylinder
PFP	Sintered Fiber Media, Pleated
PWC	Wire Mesh, Cylinder
PWP	Wire Mesh, Pleated
PLS	Sintered Laminate, Cylinder
PLP	Sintered Laminate, Pleated

Micron Rating

5	40	100
10	60	150
20	70	
30	80	

Fitting Metallurgy

S	316L
N	Nitronic 60

Elastomers

B	Buna N
N	Neoprene
V	Viton
E	EPDP
P	PTFE

Inlet/Cap Fitting Configuration

A	Female 1" NPT
B	Male 1" NPT
C	Open Gasket Fitting
D	Standard 222 double O-rings
E	Standard 226 double O-rings
F	Blind end

Cartridge Length

10	10" - 250 mm
20	20" - 500 mm
30	30" - 750 mm
40	40" - 1000 mm

Custom media, media alloys, fitting configurations, gasket materials and lengths available upon request

Porous Metal Filters, Inc.

19994 Hickory Twig Way, Spring TX, 77388

Toll Free: 866-288-2522 Tel: 281-719-1352 Fax: 281-719-1351

www.pmfiler.net

sales@pmfilter.net



Technical information is subject to change