

Product Sales Sheet

Performance Speed & Agility Turf

Performance Speed & Agility Turf features a dense, textured nylon wear layer fusion bonded to either a 5 or 12mm recycled rubber base layer. While too abrasive to fall or dive on, this consistent and tight surface is ideal for all footwork drills as well as sled work.



Markets

- Fitness
- Sports
- Student Rec

Applications

- Light Weights
- Moderate Weights
- Sled Drills
- Turf/Fields
- Functional Training
- Extreme Functional Training

Benefits

- Durable
- Sustainable
- Affordable
- Ease of Maintenance
- Slip-Resistant



Product Options

Size:

Available as a standard in rolls and tiles. All custom options should be discussed with your local agent to determine availability, pricing, minimums, and lead times.



Rolls:
8mm (3mm + 5mm) x 72" (1.83m) x 35LF (10.67m)
15mm (3mm + 12mm) x 72" (1.83m) x 25LF (7.62m)



Tiles:
15mm (3mm + 12mm) x 23" (58.42cm) x 46" (116.84cm)
Interlocking tiles are available with a coordinating interlocking transition system.



Interlocking Reducer:
46" x 12" x 3/4"
Interlocking reducers are available for quick installation at room openings, or when area mat installations are required.




Straight Reducer:
48" x 4" x 3/4"
Straight transitions are available for a more finished look after trimming tabs from tile edge.



Technical Details

Performance Criteria	Test Standard	Typical Results
Tuft Bind	ASTM D1335	> 8 lbs
Tear Strength	ASTM D5034	> 200 lbs
Lead Content	ASTM D2765	< 50 ppm
Total Yarn Linear Density	ASTM D1577	4,200 Denier
Yarn Breaking Strength	ASTM D2256	> 19 lbs
Yarn Melting Point	ASTM D7138	428°F
Flammability	ASTM D2859	Pass
Impact Insulation Class	ASTM E492	53
Delta IIC	ASTM E2179	22

*Tested on a 6" concrete slab with no ceiling.

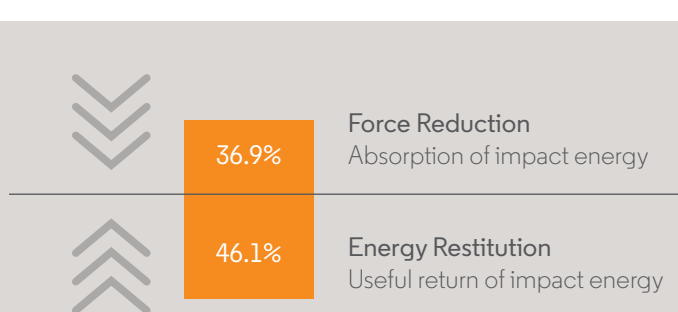

Values based on Deltac Test, 5mm.



Can a floor
do more?
Yes.