


Product Sales Sheet

Performance Motivate

Tailored for light strength and conditioning, this 7.5mm surface combines a 2.5mm wear layer with a 5mm base layer. The result: a balanced distribution of force reduction and energy restitution, designed for the shift in fitness from equipment to more functional training.

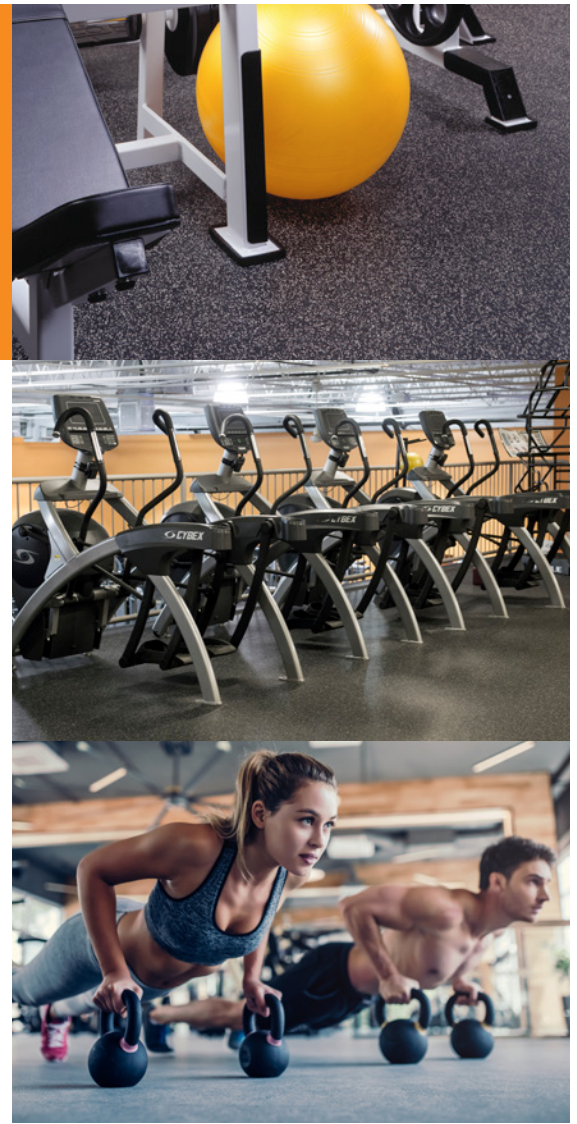

Markets

- Fitness
- Sports
- Student Rec

Applications

- Cardio
- Light Weights
- Selectorized Equipment

Benefits

- Durable
- Sustainable
- Ease of maintenance
- Slip-resistant



Product Options

Size:

Available as a standard in rolls. All custom options should be discussed with your local agent to determine availability, pricing, minimums, and lead times.

Color Options:

- See website for colors.





7.5mm (2.5mm+5mm) x 48" (1.2m)



Technical Details

| Performance Criteria | Test Standard | Typical Results |
|--------------------------------|---------------|--------------------|
| Static Load Limit | ASTM F970 | 0.004" (@ 250 psi) |
| Coefficient of Friction | ASTM D2047 | > 0.9 |
| VOC Compliant | ASTM D5116 | Yes |
| FloorScore | CA 01350 | Certified |
| Abrasion Resistance | ASTM D3389 | < 1g, 1,000 cycles |
| Pill Test | ASTM D2859 | Pass |
| Standard Vertical Deformation | ASTM F2772 | .73mm |
| Surface Effect Slip Resistance | ASTM F2772 | Pass |
| Ball Rebound | ASTM F2772 | 99.7% |
| Force Reduction | ASTM F2772 | 12.6% |
| Impact Insulation Class* | ASM E492 | 54 |
| Delta IIC* | ASTM E2179 | 24 |

*Tested on a 6" concrete slab with no ceiling.

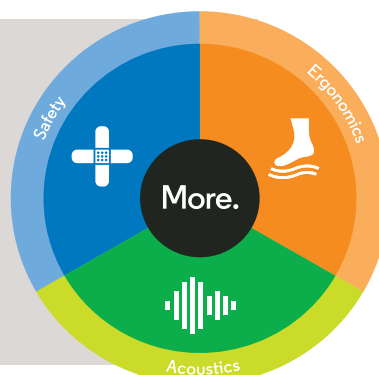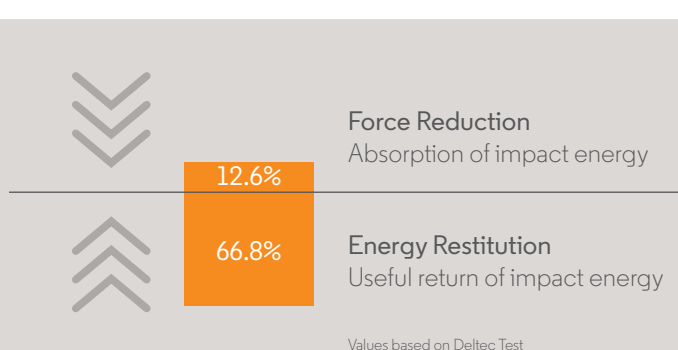

Can a floor
do more?
Yes.