

PRELIMINARY HYDROLOGY STUDY

Taelor Solar Project

Weld and Morgan Counties, Colorado

FEBRUARY 8, 2022

PREPARED FOR:



PREPARED BY:

Westwood

Westwood

Preliminary Hydrology Study

Taelor Solar Project

Weld and Morgan Counties, Colorado

Prepared For:

Balanced Rock Power
310 E 100 S
Moab, UT 84532

Prepared By:

Westwood
12701 Whitewater Drive, Suite 300
Minnetonka, MN 55343
(952) 937-5150

Project Number: R0034723.00

Date: February 8, 2022

Westwood

Table of Contents

Executive Summary	1
1.0 Data Sources.....	2
2.0 Coordinate System.....	2
3.0 Existing Conditions	3
3.1 Project Location.....	3
3.2 Watershed Hydrology	3
3.3 Onsite Conditions.....	3
3.4 FEMA Flood Zones.....	4
4.0 Proposed Conditions	4
4.1 Proposed Conditions	4
4.2 Post-Construction Stormwater Management.....	5
5.0 FLO-2D Modeling	5
5.1 FLO-2D Modeling Overview.....	5
5.2 Elevation Data	5
5.3 Watershed Soils and Land Cover	5
5.4 Precipitation	6
5.5 Inflows.....	6
6.0 Flood Analysis Results.....	6
6.1 Existing Conditions Flood Analysis	6
6.2 Scour.....	8
7.0 Recommendations.....	8
8.0 Next Steps.....	9
9.0 Included Output Files	10
10.0 References Cited.....	11

Tables

Table 1 – Data Sources	2
Table 2 – Coordinate System Used	2
Table 3 – Inflow Rates	6
Table 4 – Flood Depths Onsite	7

Exhibits

- Exhibit 1: Location Map
- Exhibit 2: Base Hydrologic Map
- Exhibit 3: USGS, FEMA, and NWI Wetlands Map
- Exhibit 4: Soils Map
- Exhibit 5: Landcover Map
- Exhibit 6: Curve Number and Topographic Source Map
- Exhibit 7: 100-Year Max Flood Depth Map
- Exhibit 7a: 100-Year Max Flood Depth Project Area Map
- Exhibit 8: 100-Year Peak Velocity Map
- Exhibit 8a: 100-Year Peak Velocity Project Area Map
- Exhibit 9: 100-Year Scour Map
- Exhibit 10: 50-Year Max Flood Depth Map
- Exhibit 10a: 50-Year Max Flood Depth Project Area Map
- Exhibit 11: 50-Year Peak Velocity Map
- Exhibit 11a: 50-Year Peak Velocity Project Area Map
- Exhibit 12: 50-Year Scour Map

Appendices

- Appendix A: NOAA Atlas 14 Precipitation Data
- Appendix B: Curve Number Table
- Appendix C: FEMA Flood Insurance Rate Map (FIRM)
- Appendix D: USGS StreamStats Reports

Executive Summary

The purpose of this study is to analyze and review the existing hydrology of Phases 1 and 2 of the Taelor Solar Project (Project or Site) and any impacts that the hydrology may play in the design of the proposed solar array. This report was prepared to be used by the Project Team in the design and layout of the Project and not intended for submittal to reviewing agencies for stormwater permitting.

The Project Site is proposed on approximately 17 square miles and is located within Weld and Morgan Counties, Colorado, approximately 2.75 miles southwest of the city of Wiggins in Morgan County, Colorado. The Site is located on rough and varying land that generally slopes inwards towards the onsite reaches. The modeled watershed area encompasses approximately 94 square miles and generally drains northeast.

The analysis of the 100-year, 24-hour storm shows low water depths and velocities (Exhibits 7 through 8A) across the majority of the Site, outside of the onsite reaches and creeks. Higher flood depths and velocities exist within these creeks and their surrounding area. The floodplains onsite are fairly large; however, the flooding is generally well-contained within the floodplain limits. There are also scattered low-lying areas with localized ponding across the Project Site. Minimal velocities and scour are expected on site, outside of the onsite reaches and floodplains, due to the rough terrain and lack of consistent steep slopes.

The analysis of the 50-year, 24-hour storm event yielded similar results to those of the 100-year, 24-hour storm, but with slightly less severe depths, velocities, and scour (Exhibits 10-12).

Based on experience with similar projects, the majority of the Site is suitable for the planned development; however there are portions of the site which will be unusable for solar development, based on the presences of hazardous flows and velocities.

1.0 Data Sources

Table 1 – Data Sources

Task	Format	Source	Use
Elevation	2ft LiDAR	The National Map	FLO-2D Model Elevations
Crop Data	Shapefile	USDA 2013 Crop Data Layer	Landcover
Soils	Shapefile	USGS SSURGO Dataset	Curve Numbers
Precipitation	PDF File	NOAA Atlas 14	Design Storms
HUC-12 Drainage Boundary	Shapefile	USGS	Define Model Extents
Site Boundary	Taelor Solar - Max Footprint2.shp	Balanced Rock Power	Define Model Extents
2014 Aerial Photography	ArcGIS Map Service	USDA FSA	Reference
FEMA Flood Zones	PDF; Shapefile	FEMA	Reference
Culvert Locating and Sizing	Aerial Imagery	Google Earth	Culvert Modeling
Peak Flowrates	PDF	USGS StreamStats	Inflow Hydrographs

2.0 Coordinate System

Table 2 – Coordinate System Used

Projection	State Plane Coordinate System
Zone	Colorado North (FIPS 501)
Datum	NAD83
Planar Units	Feet (U.S. Survey)

3.0 Existing Conditions

3.1 Project Location

The Project Site, Phases 1 and 2 of the Taelor Solar Project, covers approximately 17 square miles and is located within Weld and Morgan Counties, Colorado (Exhibit 1). The Project Site is located approximately 50 miles northeast of Denver, with the nearest town being Wiggins in Morgan County, Colorado. Wiggins is located 2.75 miles northeast of the Project Area (Exhibit 1).

3.2 Watershed Hydrology

The modeled watershed area encompasses approximately 94 square miles that generally discharges to the northeast. The watershed is primarily defined by Kiowa Creek, which originates south of the Project, entering the Project through its southwest corner and flowing northeast through its limits. Kiowa Creek is defined by a fairly wide floodplain, which can range from 2,000 ft to over a mile in width.

Jack Rabbit Creek flows into Kiowa Creek just within the southwest limits of the Site, also originating from the south, but just west of Kiowa Creek.

Rock Creek enters the watershed from the south, approximately 5 miles east of Kiowa Creek, and then flows north through the eastern portion of the Site. Rock Creek then flows into Kiowa Creek within the northeastern corner of the Project.

An additional unnamed tributary of Kiowa Creek enters the watershed from the southeast. The tributary flows north-northwest just east of the project, before flowing into Kiowa Creek roughly 2,500 ft downstream of its junction with Rock Creek, just off the eastern limits of the Site.

See Exhibits 2 and 3 for geospatial displays of the watershed and its features.

3.3 Onsite Conditions

The Project is located on varying landscape, defined by several reaches as well as distributed patches of rougher terrain. The northwestern portion of the site generally is rougher, containing rolling slopes of 1% to 4%, with rougher distributions of a sort of prairie-pothole landscape, defined by many pockets of low-lying depressions. This area minimally discharges; however, there is a subtle drainage pattern towards Kiowa Creek to the southeast.

The majority of the stretch of land extended from the southwestern corner to the northeastern corner of the Site is defined by the channel and floodplain of Kiowa Creek. The floodplain is generally flatter, with more consistent slopes generally less than 0.5%. The southeastern banks are generally made up of rolling terrain with slopes generally between 1% to 4%, whereas the northwestern banks are more

comprised of the rough, prairie-pothole landscape. Kiowa Creek discharges offsite to the northeast.

The eastern portion of the project is generally covered by the channel and floodplain of Rock Creek, as it flows north and merges with Kiowa Creek. The banks are generally made up of the rolling landscape; however, there are small instances of isolated rough prairie-pothole patches. The majority of the runoff from this portion of the site discharges offsite to the northeast via Kiowa Creek.

US Fish and Wildlife Service National Wetlands Inventory (NWI Wetlands) provides information on the distribution of US wetlands and are shown in Exhibit 3. The NWI Wetlands dataset is not all-inclusive and other wetlands not shown may exist. The landcover on the Project area is primarily pastureland and agricultural row crops (Exhibit 6) and has soils that are primarily belonging to Hydrologic Soil Group (HSG) A (Exhibit 5). Typically, A soils are sands.

The main potential hydrologic issues on Site are riverine flooding and erosive velocities, although isolated pockets of ponding should also be considered.

3.4 FEMA Flood Zones

FEMA has completed a study to determine flood hazards for the selected location; the project area is covered by FIRM panels 08087C0575D, 08123C2035E, 08123C2050E, and 08087C0555D (Appendix C). FIRM panels 08123C2035E and 08123C2050E are within Weld County and have not yet been printed; however, electronic flood zones have been delineated for portions of these panels. The Project contains areas of FEMA Zone A flood hazards (Exhibits 3, 7, and 10), particularly associated with Rock Creek and the portions of Kiowa Creek within Morgan County. A FEMA Zone A flood hazard is a 100-year flood hazard with no defined base flood elevation. Preliminary FIRM panels have been issued for Weld County; however, they have not yet been made available or effective.

4.0 Proposed Conditions

4.1 Proposed Conditions

The majority of the proposed solar facility will consist of above ground mounted solar modules. A climate-specific grass seed mix should be planted below the modules and would make up a majority of the land cover. A small amount of impervious surface will be added from the gravel access roads and electrical equipment pads. The Project should be designed to minimize grading and maintain existing drainage patterns. A flood analysis of pre-development and post development depths may need to be completed once civil design is finalized for permitting purposes.

4.2 Post-Construction Stormwater Management

A desktop review of Weld County and Morgan County Stormwater Management and Drainage Requirements identified the 2020 Weld County Engineering and Construction Criteria manual, the Morgan County Zoning Regulations, and the Mile High Flood District (MHFD) Criteria Manual. As the Site design progresses, these manuals and documents should be referenced in order to assure that the Site design complies with any rate control, volume control, or water quality requirements that are outlined within them.

The typical solar project's low-impact development technique of converting the land cover from a row crop field to a meadow grass will provide post-construction stormwater management to meet most agency requirements. The proposed meadow grass will act as a vegetated filter providing both runoff treatment and reduction when compared to existing conditions. As the Project design advances, the post-construction stormwater management should be reviewed in further detail with the County Engineer.

5.0 FLO-2D Modeling

5.1 FLO-2D Modeling Overview

FLO-2D is a physical process model that routes rainfall runoff and flood hydrographs over flow surfaces or in channels using the dynamic wave approximation to the momentum equation. FLO-2D offers advantages over 1-D models and unit hydrograph methods by allowing for breakout flows and visualization of flows across a potential site. The primary inputs are a DTM (elevation data), curve numbers, and precipitation. No culverts were included in the model; all roadways and berms were assumed to overtop.

A FLO-2D model with 50-foot grid cells was utilized to model the watershed within and directly impacting the Project Site.

5.2 Elevation Data

The elevation data input into the FLO-2D model was 2ft LiDAR data from The National Map (Exhibit 6). This data was exported as a single digital terrain model (DTM), which is read directly into FLO-2D.

5.3 Watershed Soils and Land Cover

USDA-NRCS SSURGO soil data provides soil types within the Project boundary and full coverage of the contributing watershed. Soils are primarily classified as Hydrologic Soil Group (HSG) A within the Project boundary (Exhibit 4). Land cover was obtained from the USDA 2013 Crop Data Layer. Exhibit 5 displays the land cover classes for the entire watershed. Curve numbers were applied to each

grid cell in the FLO-2D model based on intersecting the grid with the curve numbers (Exhibit 6).

5.4 Precipitation

Precipitation data was downloaded from NOAA Atlas 14 (Appendix A) and used for the FLO-2D analysis for the 100-Year and 50-Year, 24-Hour storm events. Using the 100-Year and 50-Year rainfall depths of 4.54 inches and 3.95 inches, respectively, for this location allows for the best initial analysis in order to determine the worst areas of flooding and erosion during multiple different storm events. Rainfall inputs were distributed based on a site-specific nested Atlas 14 distribution pattern.

5.5 Inflows

Jack Rabbit Creek, Kiowa Creek, Rock Creek, and an Unnamed Tributary of Kiowa Creek all flow into the modeled watershed. USGS StreamStats provides 50-year and 100-year peak flow rates for these reaches (Appendix D). In order to account for these flows, inflow hydrographs were created at each location where these reaches enter the modeled watershed. Table 3 below displays the flow rates for each reach and flood event. See Exhibits 7 and 10 for inflow locations.

Table 3 – Inflow Rates

Reach	50-Year Peak Flow (cfs)	100-Year Peak Flow (cfs)
Jack Rabbit Creek	3,250	4,660
Kiowa Creek	28,900	40,700
Rock Creek	8,780	12,500
Unnamed Tributary	2,750	3,940

6.0 Flood Analysis Results

6.1 Existing Conditions Flood Analysis

The 100-year, 24-hour analysis shows low to moderate water depths and low velocities (Exhibits 7 through 8A) across the majority of the Site, outside of the influence of the onsite reaches. During a 100-year storm, the flood depths across the majority of the Project Area are less than 0.5 feet with velocities less than 1 foot/second, with the exception of the flows within the main onsite creeks and their associated floodplains. The 100-year flood depths within the onsite portions of the main channels of Kiowa Creek and Rock Creek can easily exceed 10ft, whereas the depths within the floodplains are generally between 2ft to 8ft. The area where the two creeks converge results in a large area of more significant flooding, due to the convergence of the creeks' floodplains. Although the extents of the floodplains are fairly wide, the flooding within them is generally well-contained to the floodplain

limits. The 100-year peak velocities within the channels can exceed 13 ft/second, whereas the velocities within the floodplain are generally between 1 ft/second and 6 ft/second. The majority of flood depths and velocities associated with the unnamed tributary to the east do not directly encroach onto the Project Area itself.

In addition to the riverine flooding, there are additional areas of isolated flooding within the more prairie-pothole portions of the site, particularly to the northwest. The 100-year flood depths within these pothole areas are generally less than 5ft, but have minimal velocities due to their disconnected nature. The presence of HSG A soils within the Project will likely help these flood depths infiltrate more quickly. See Table 3 below for a breakdown of 100-year flood depths within the Project Site.

Table 4 – Flood Depths Onsite

Peak Flow Depth (ft)	Percentage of Project Area Covered by Peak Flow Depths
0.00 - 0.49	56.5%
0.50 - 1.00	4.5%
1.01 - 1.50	5.6%
1.51 - 2.00	6.4%
2.01 - 2.50	5.9%
2.51 - 3.00	4.6%
3.01 - 4.00	5.9%
4.01 - 6.00	6.6%
6.01+	4.0%

See Exhibits 7 through 8A for areas within the Project with higher flood depths and velocities during the 100-year, 24-hour storm.

Overall, the results of the 50-year, 24-hour storm model were similar to those of the 100-year, 24-hour storm, but with slightly lower extremes. The exceedance of 13 ft flood depths within the creek channels is less common during the 50-year storm, although it still occurs in some areas. The majority of channel depths are generally less than 10 ft. Similarly, the presence of floodplain depths in excess of 7ft is less common during the 50-year storm, with the majority of the floodplain depths being less than 5ft. Within the isolated ponding locations, flood depths rarely exceed 4ft. Channel velocities are generally less than 10 ft/second, with floodplain velocities generally between 1 ft/second and 5.5 ft/second. See Exhibits 7 through 8A for areas within the Project with higher flood depths and velocities during the 50-year, 24-hour storm.

6.2 Scour

Minimal scour is expected onsite, outside of the main reaches and their associated floodplains, during both the 50-year and 100-year storms (Exhibits 9 and 12). The scour depths calculated for this Project are based on HEC-18 Pier Scour Equations of a 6-inch-wide pile perpendicular to flow. Scour calculations consist of local scour only with unarmored soils and pile bases to provide the conservative local scour results. These scour results do not account for general, rill, or gully scour.

7.0 Recommendations

Based on experience on similar projects, the majority of the Site is suitable for the planned development; however, portions of the site, as is seen in Table 4 as well as Exhibits 7-12, will be unsuitable for solar development, due to the presence of hazardous flows and velocities. These areas should be reviewed and considered as Site design progresses, for areas of avoidance, as well as any potential locations where infrastructure could be designed to accommodate higher flood depths. Additionally, local stormwater requirements and regulations should be reviewed as the design progresses, in order to ensure Site compliance.

8.0 Next Steps

1. Final engineering design should account for the flood depths and velocities presented in Exhibits 7-11A.
2. Facilities to be elevated 1' above the 100-year, 24-hour peak flood elevations.
3. Proposed facilities should avoid FEMA Flood Zones located onsite.
4. Stormwater management should be revisited to ensure the final design meets the local and state requirements.

9.0 Included Output Files



1. Shapefile of 100-Year Rain Event Flow Depth
2022-02-08_Taelor_PrelimFlowDepthatCell_100yr.shp
 Attribute "ID" = Grid Cell Number
 Attribute "VAR" = Max Flow Depth (Feet)

2. Shapefile of 100-Year Rain Event Velocity
2022-02-08_Taelor_PrelimVelocityatCell_100yr.shp
 Attribute "ID" = Grid Cell Number
 Attribute "VAR" = Max Velocity (Feet)

3. Shapefile of 50-Year Rain Event Flow Depth
2022-02-08_Taelor_PrelimFlowDepthatCell_50yr.shp
 Attribute "ID" = Grid Cell Number
 Attribute "VAR" = Max Flow Depth (Feet)

4. Shapefile of 50-Year Rain Event Velocity
2022-02-08_Taelor_PrelimVelocityatCell_50yr.shp
 Attribute "ID" = Grid Cell Number
 Attribute "VAR" = Max Velocity (Feet)

5. KMZ of FLO-2D Results
2022-02-08_Taelor_PrelimFLO-2D.kmz
 Overlay in Google Earth for graphical representation.

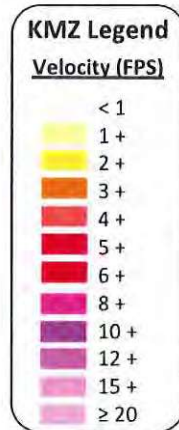

10.0 References Cited

National Engineering Handbook, Part 630 Hydrology. Chapter 9 Hydrologic Soil-Cover Complexes. USDA. NRCS. 210-VI-NEH, July 2004

The National Map, 2-ft DEM, Elevation data, Accessed February 2022, from <https://viewer.nationalmap.gov/basic/>

Web soil survey. Retrieved February 2022, from <https://websoilsurvey.sc.egov.usda.gov/App/WebSoilSurvey.aspx>

NOAA Atlas 14 Point Precipitation Frequency Estimates. Retrieved February 2022 from <https://hdsc.nws.noaa.gov/hdsc/pfds/>

USGS. USGS water resources: About USGS water resources. Retrieved February 2022, from <https://water.usgs.gov/GIS/huc.html>

USDA 2013 Crop Data Layer, Landcover data, retrieved February 2022, from https://www.nass.usda.gov/Research_and_Science/Cropland/SARS1a.php

FEMA Flood Insurance Rate Maps, retrieved February 2022, from <https://msc.fema.gov/portal/advanceSearch#searchresultsanchor>

USGS Streamstats Flow Rates, retrieved February 2022, from https://www.usgs.gov/mission-areas/water-resources/science/streamstats-streamflow-statistics-and-spatial-analysis-tools?qt-science_center_objects=0#qt-science_center_objects



Morgan County Zoning Regulations, retrieved February 2022, from <https://morgancounty.colorado.gov/sites/morgancounty/files/Zoning-Regulations-21819.pdf>

Mile High Flood District. Criteria Manual, retrieved February 2022, from <https://mhfd.org/resources/criteria-manual-volume-3/>

Weld County Engineering and Construction Criteria, retrieved February 2022, from <https://www.weldgov.com/files/sharedassets/public/departments/public-works/documents/evans-folder/2020-weld-county-engineering-and-construction-criteria-final-version-2021-03-17.pdf>

The background of the page is a dark, textured topographic map. It features intricate red contour lines that form various shapes and patterns across the entire surface. A prominent dashed red line runs vertically through the center of the map. The word "Exhibits" is printed in a white, serif font in the upper left quadrant of the page.

Exhibits

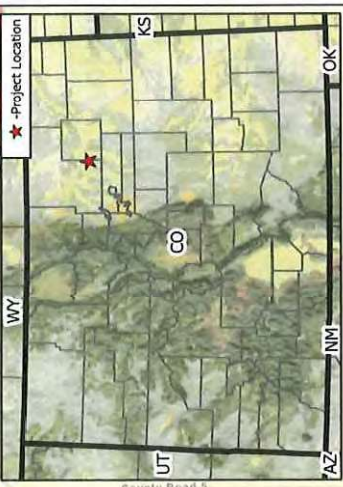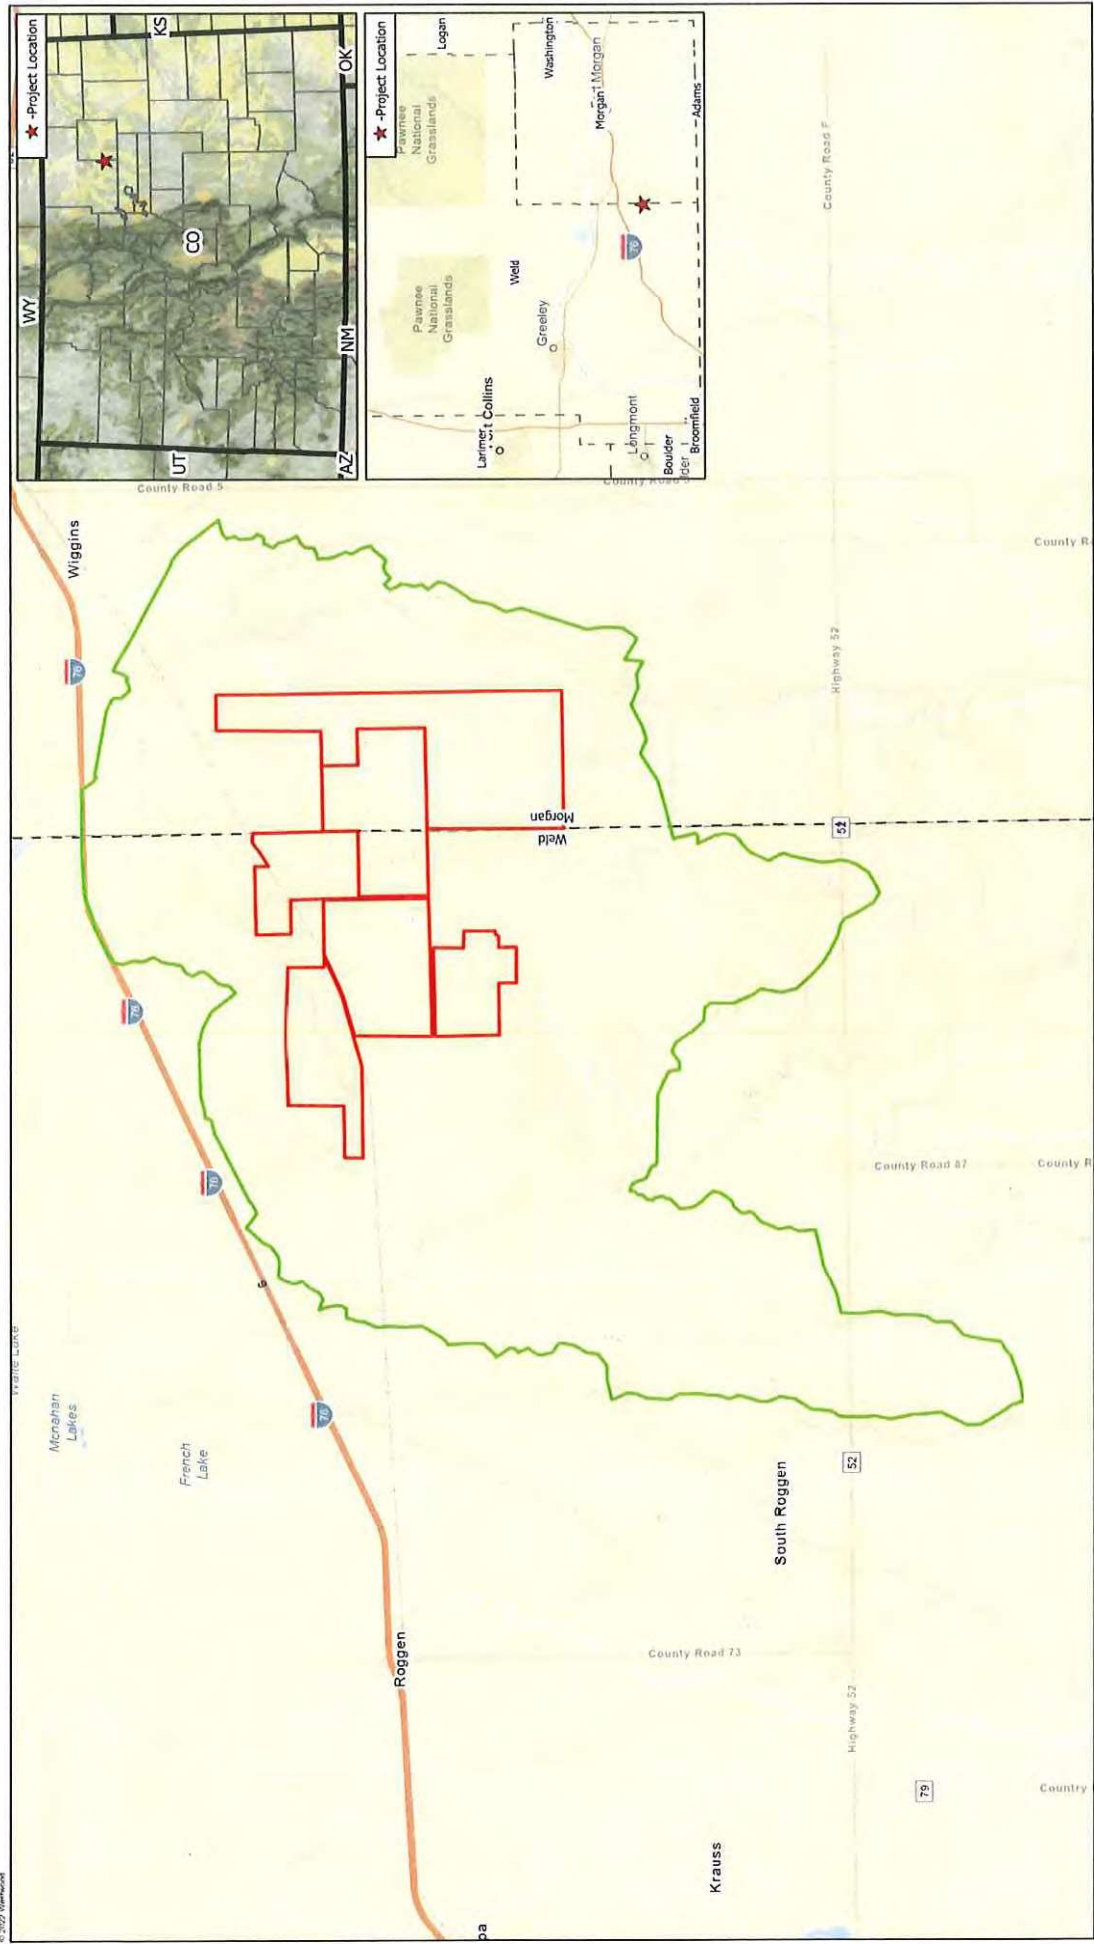

Taylor Solar Project

Weld and Morgan Counties, Colorado


Exhibit 1: Location Map
February 7, 2022



- Legend**
- Project Boundary- Phases 1 & 2
 - FLO-2D Boundary
 - County Boundary

Westwood
Toll Free (888) 937-5150 westwoodps.com

Date: September 2022, EIR 1442
Drawing: Energy Access, 2021_0505
02021EMA.020, USGA.0201

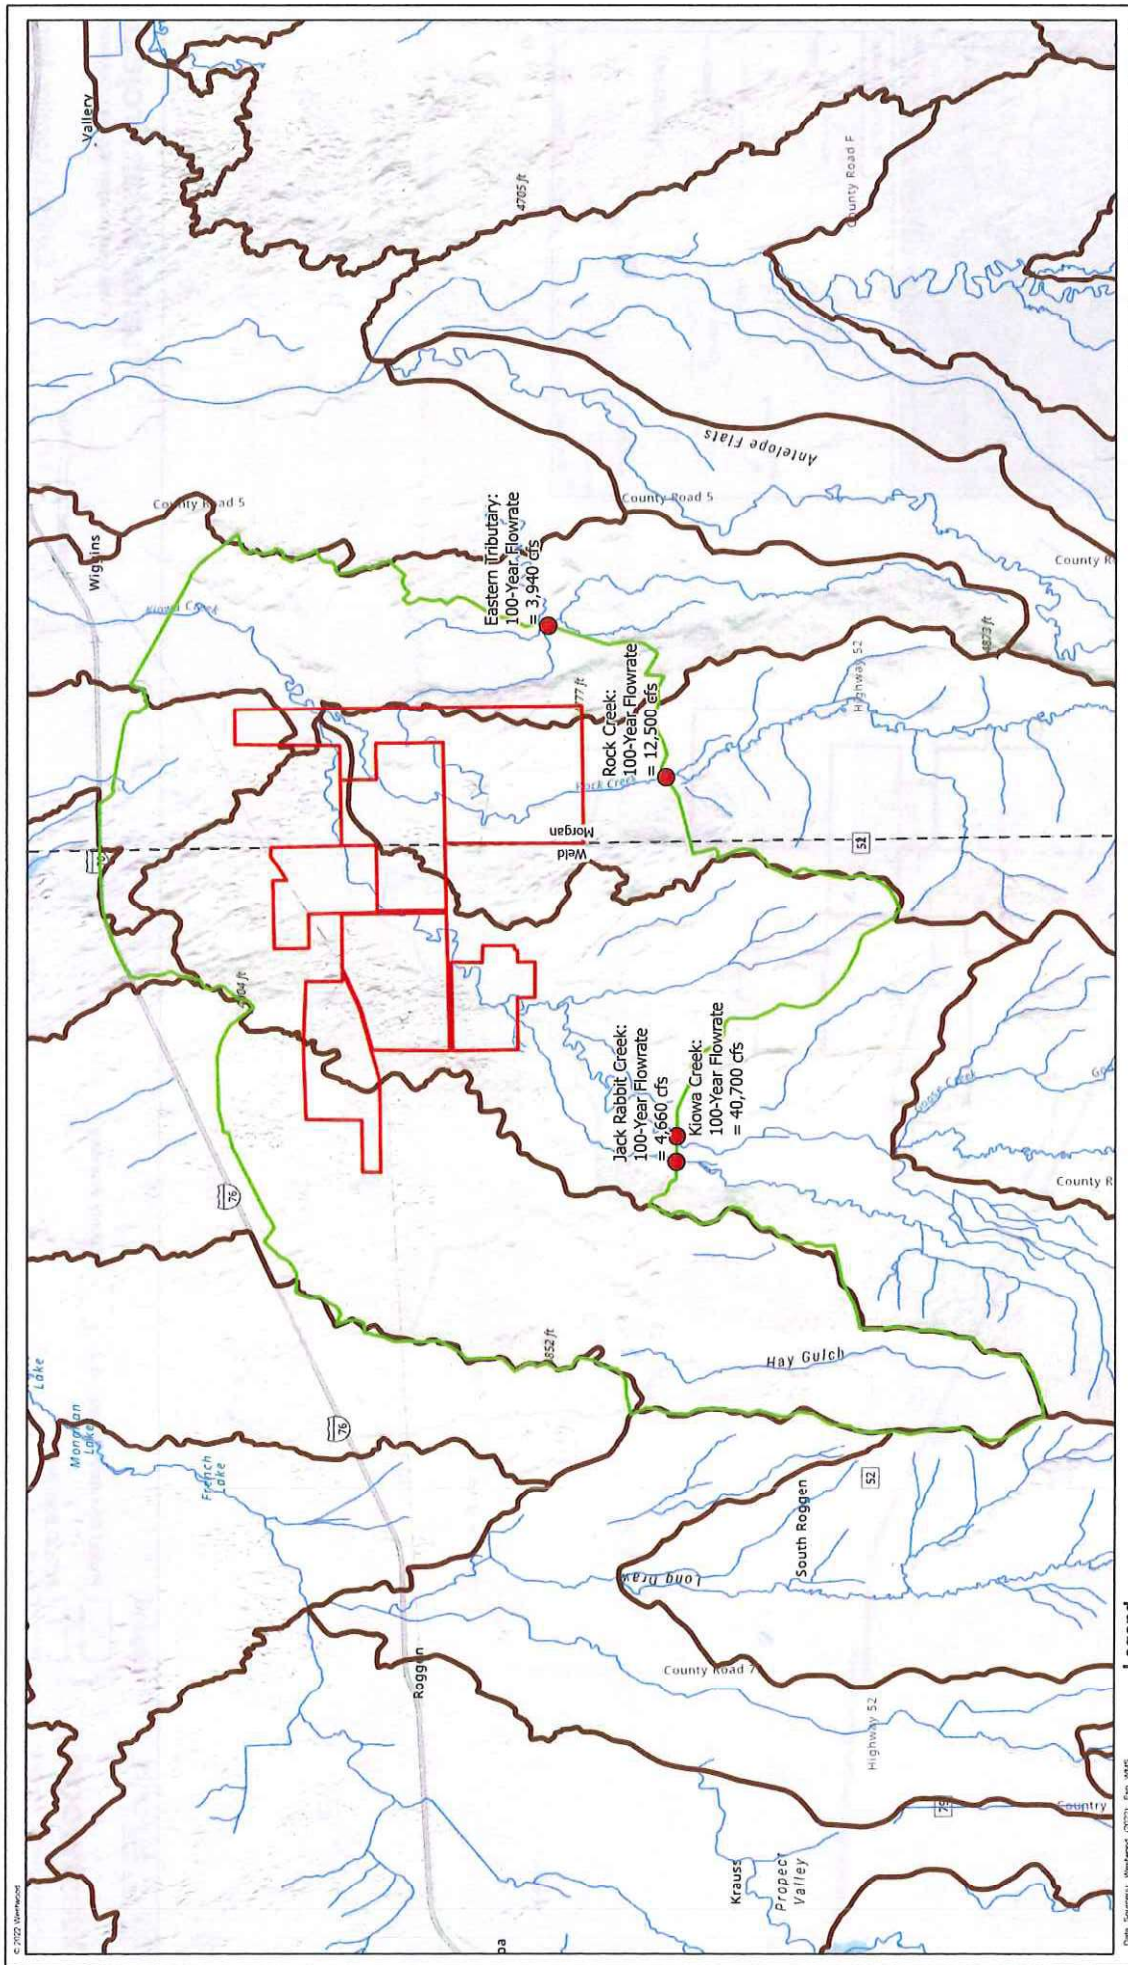

Taylor Solar Project

Weld and Morgan Counties, Colorado

Exhibit 2: Base Hydrologic Map


February 7, 2022



- Legend**
- Project Boundary- Phases 1 & 2
 - HUC-12 Boundary
 - FLO-2D Boundary
 - NHD Flowlines
 - County Boundary
 - Inflow Location

Westwood
 Toll Free (888) 937-5150 www.westwood.com

Data Sources: Westwood (2022), Esri, WMS, Westwood (2022), USGS, USGS (2022), USGS (2022)

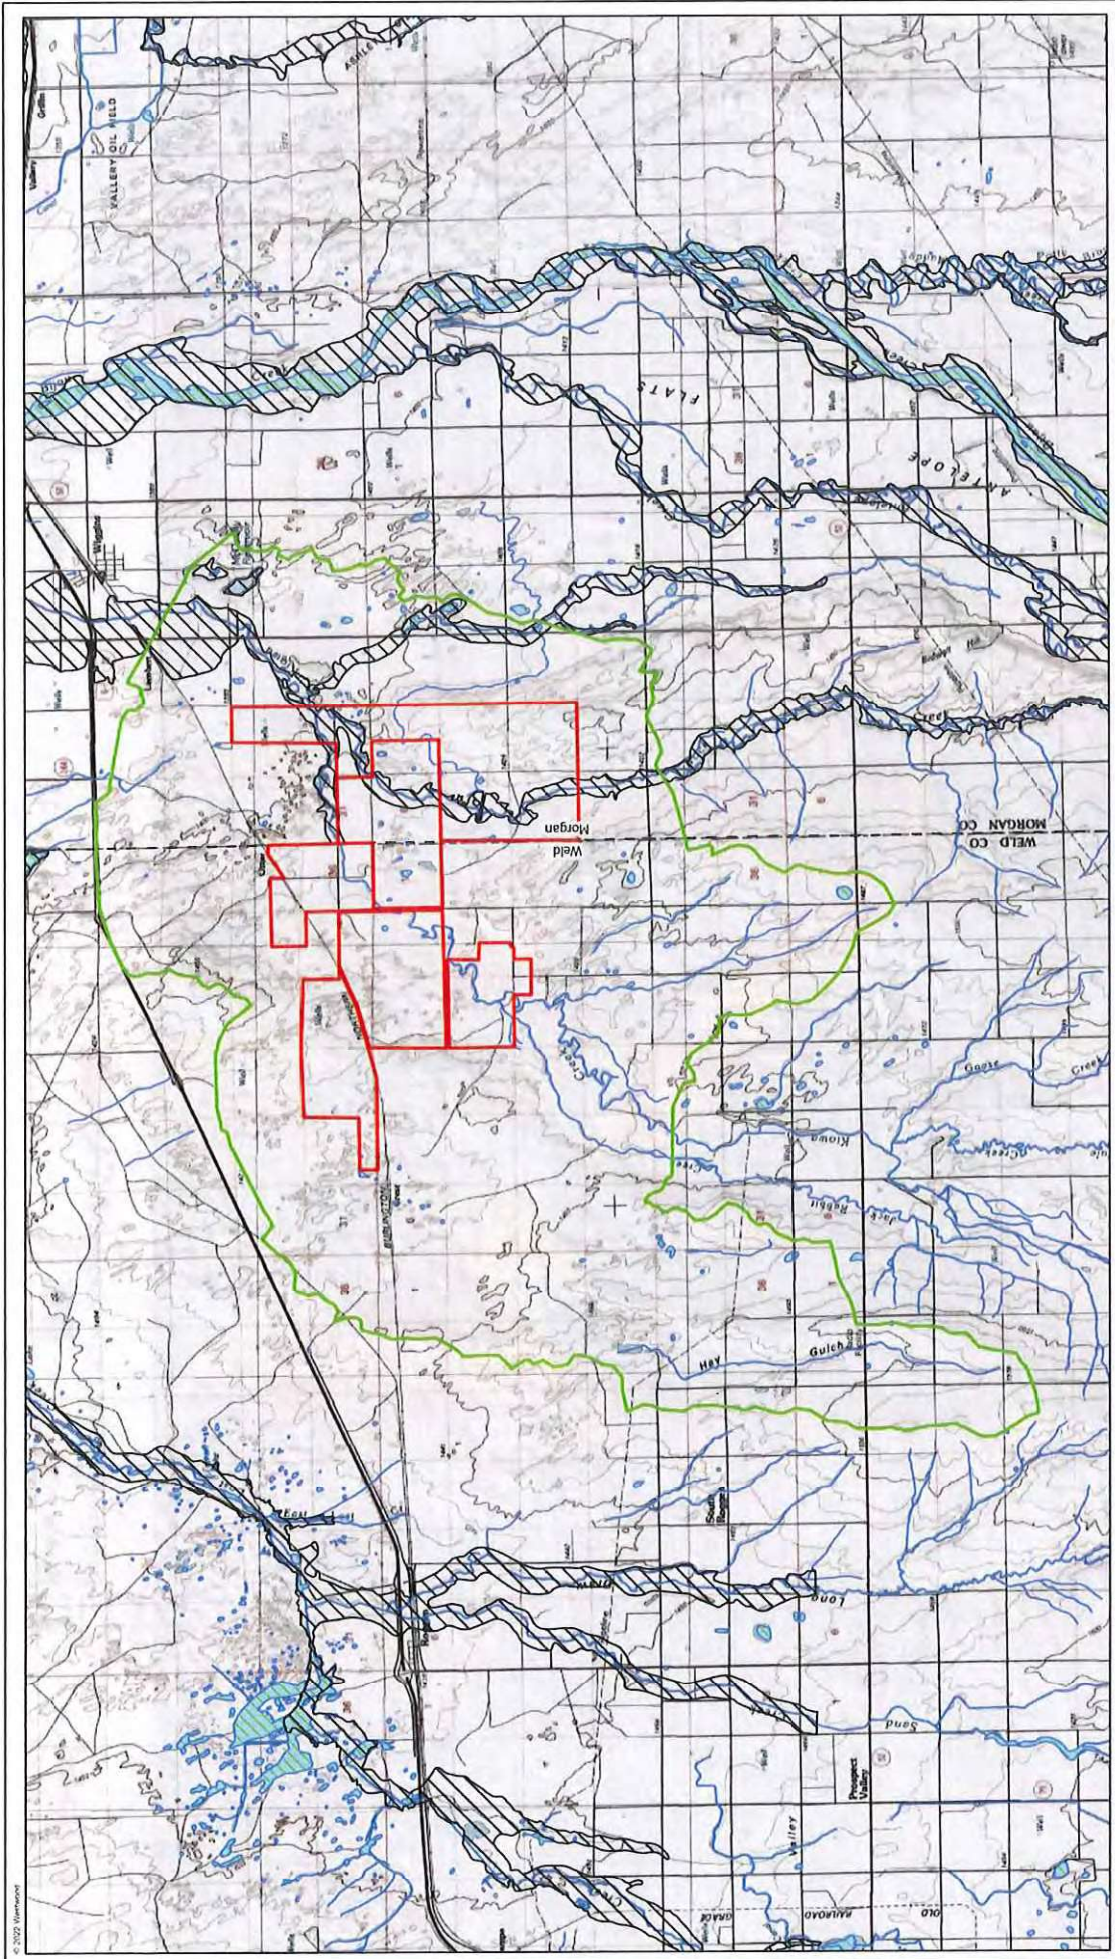


Taylor Solar Project

Weld and Morgan Counties, Colorado

Exhibit 3: USGS, FEMA, and NWI Wetlands Map

February 7, 2022




- Legend**
- Project Boundary- Phases 1 & 2
 - FEMA Zone A
 - FLO-2D Boundary
 - NWI Wetlands
 - County Boundary

Westwood
 (888) 937-5150 www.westwood.com

© 2022 Westwood

Westwood has prepared this map for the TAYLOR SOLAR PROJECT. It is not intended to be used for any other purpose. The map is not a warranty, representation, or guarantee of accuracy. The map is not to be used for any purpose other than that for which it was prepared. The map is not to be used for any purpose other than that for which it was prepared. The map is not to be used for any purpose other than that for which it was prepared.

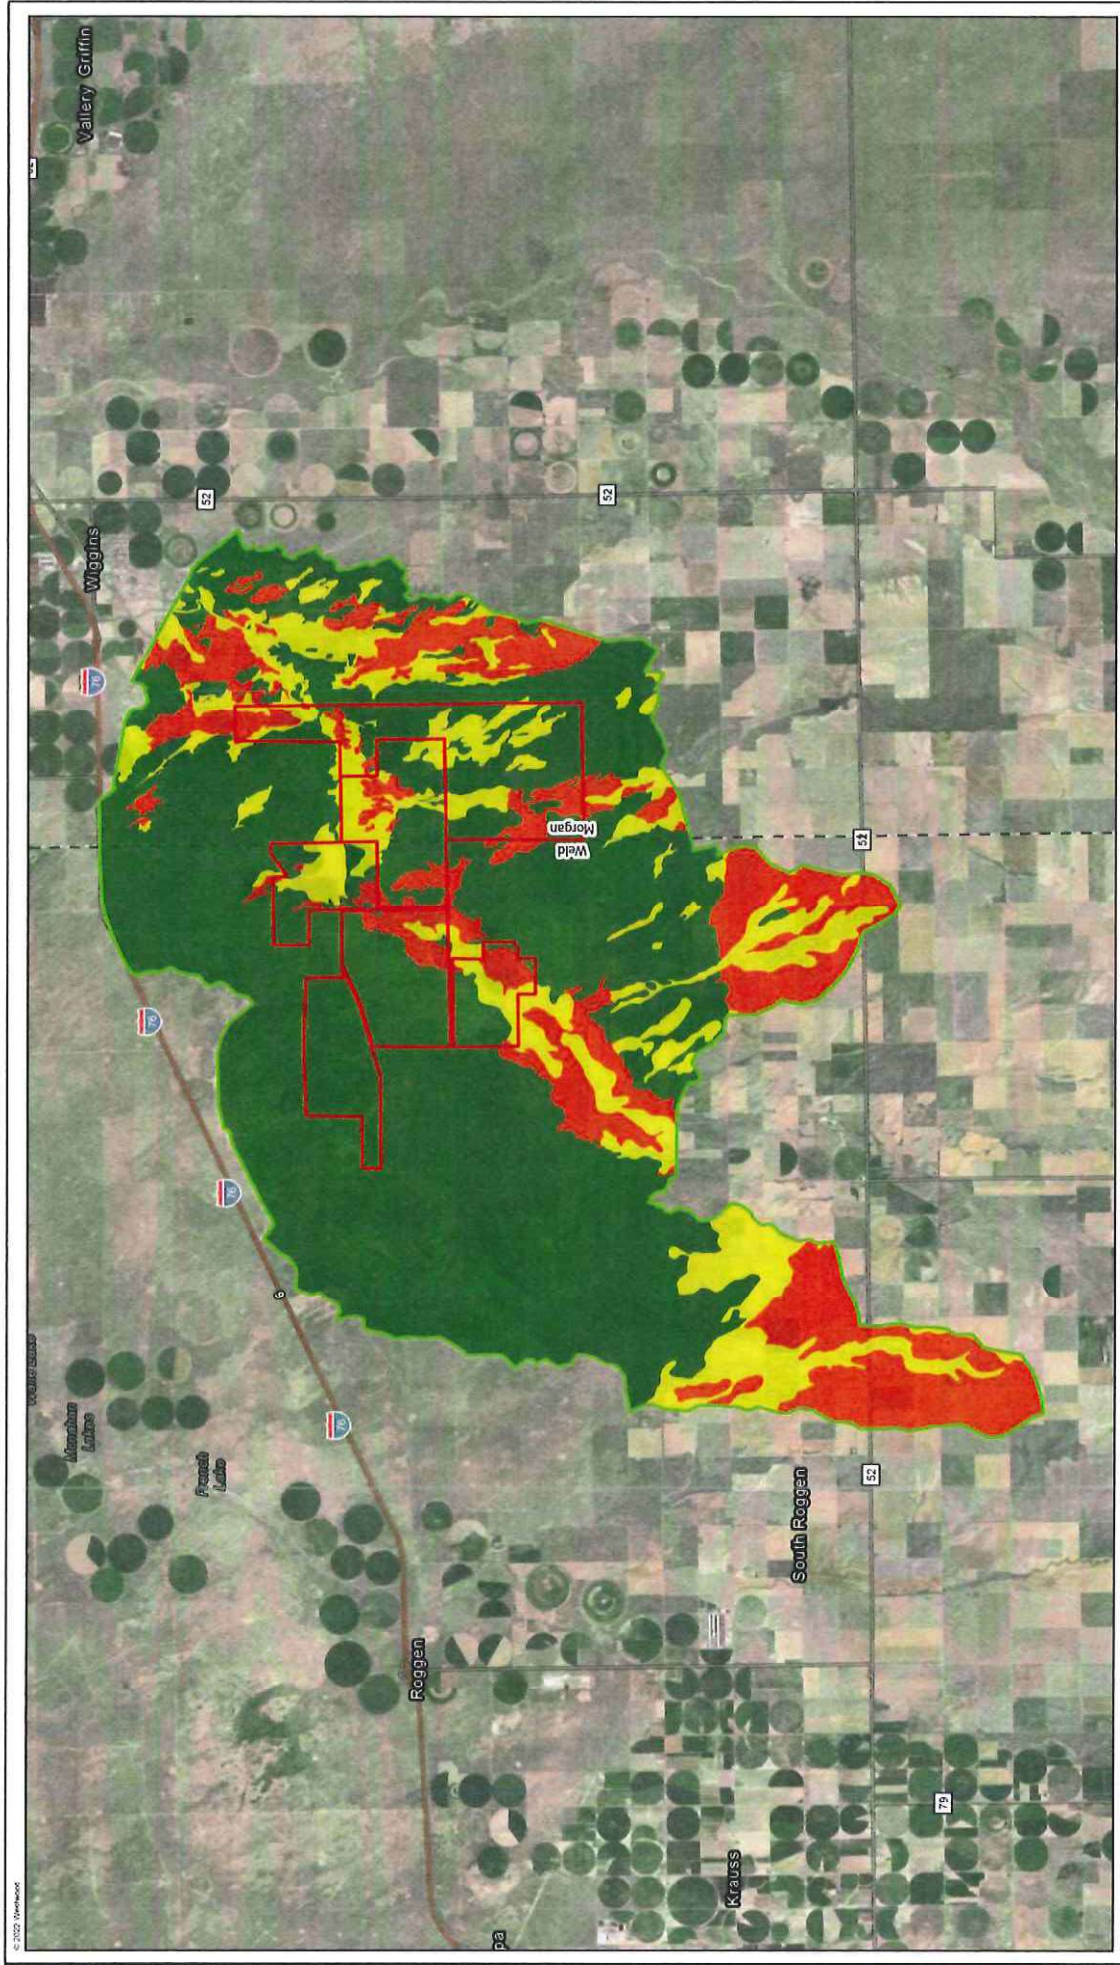

Taelor Solar Project


Weld and Morgan Counties, Colorado

Exhibit 4: Soils Map
February 7, 2022



Data Sources: Westwood (2021), Esri, NOAA, USGS, FEMA (2021), USDA (2021)

Westwood
Toll Free (888) 937-5150 www.westwoodge.com

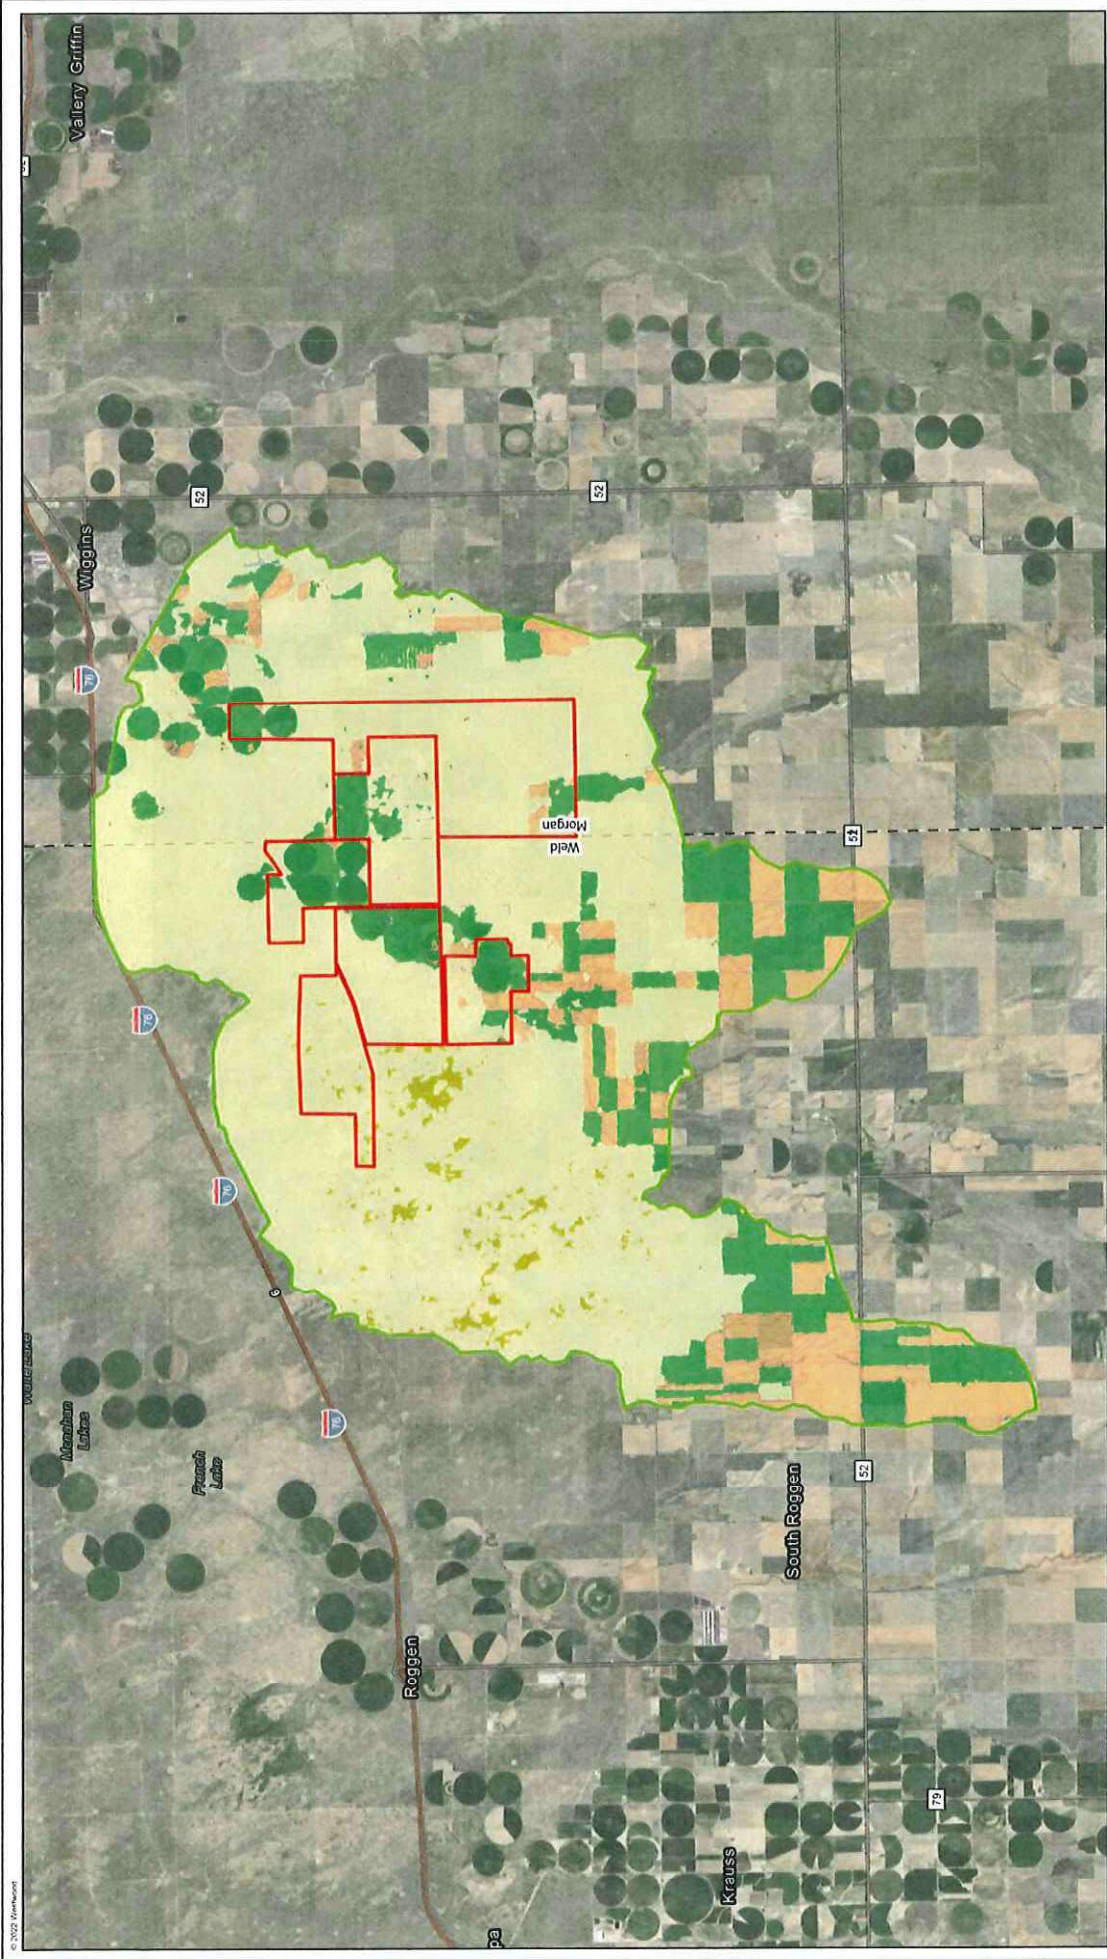

Taelor Solar Project

Weld and Morgan Counties, Colorado


Exhibit 5: Landcover Map
February 7, 2022



- Legend**
- Project Boundary- Phases 1 & 2
 - FLO-2D Boundary
 - County Boundary
 - Landcover
 - Barren
 - Cultivated
 - Developed
 - Fallow
 - Woods
 - Grassland/Pasture
 - Shrubland
 - Water
 - Wetland

State Symbols: Westwood (2022), Esri (1995)
 Base Imagery: Imagery (Accessed 2022), USGS
 (2022), USDA (2022), USDA (2022)

Westwood
 Toll Free: (888) 937-5150 westwoodcs.com

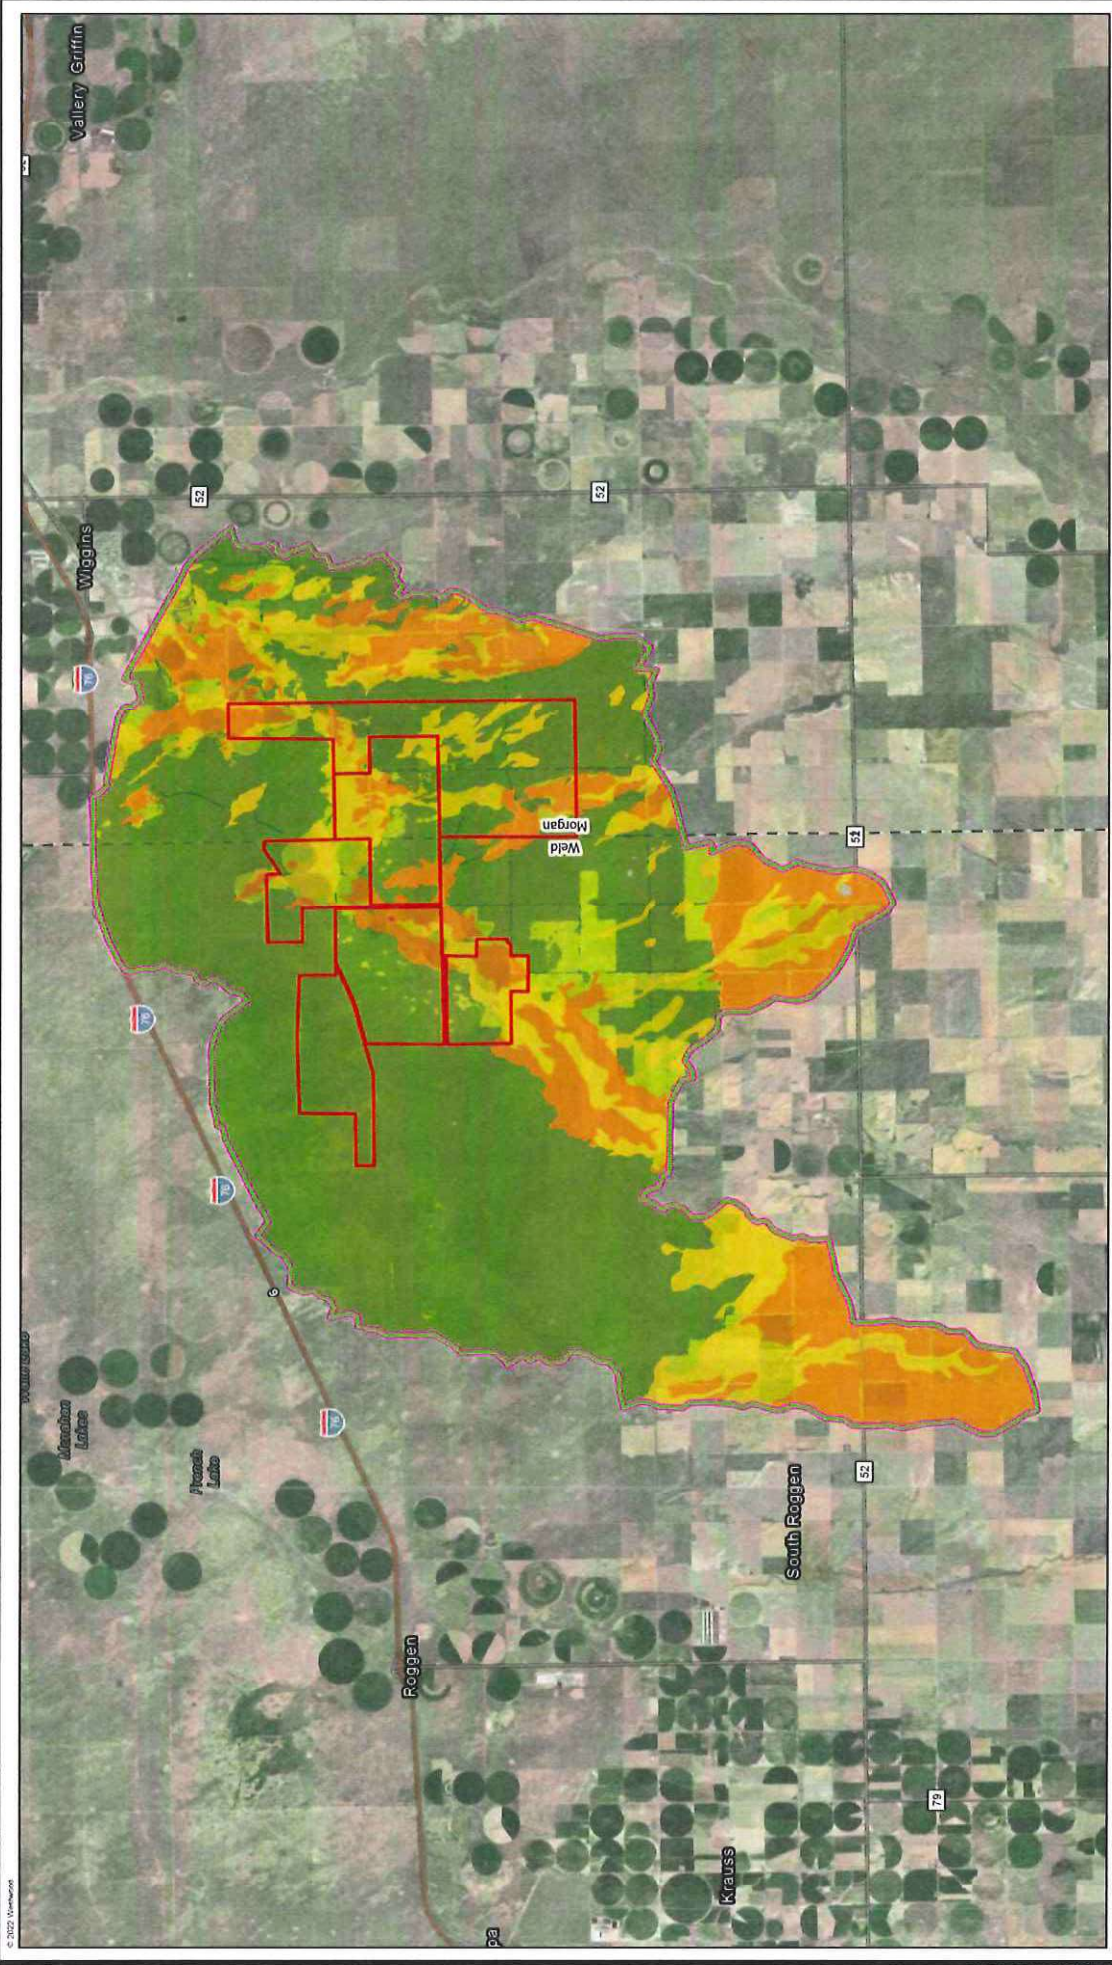


Taelor Solar Project

Weird and Morgan Counties, Colorado

Exhibit 6: Curve Number and Topographic Source Map

February 7, 2022




Legend

	Project Boundary- Phases 1 & 2		70 - 79
	FLO-2D Boundary		80 - 89
	County Boundary		90 - 99
	2-ft LIDAR Extents		60 - 69
			50 - 59
			40 - 49

Westwood
 Toll Free (888) 937-5150 westwoodps.com

Date: 2/22/2022, 10:58 AM
 Project: Taelor Solar Project
 File: Exhibit 6 - Curve Number and Topographic Source Map
 Author: Westwood
 Version: 1.0

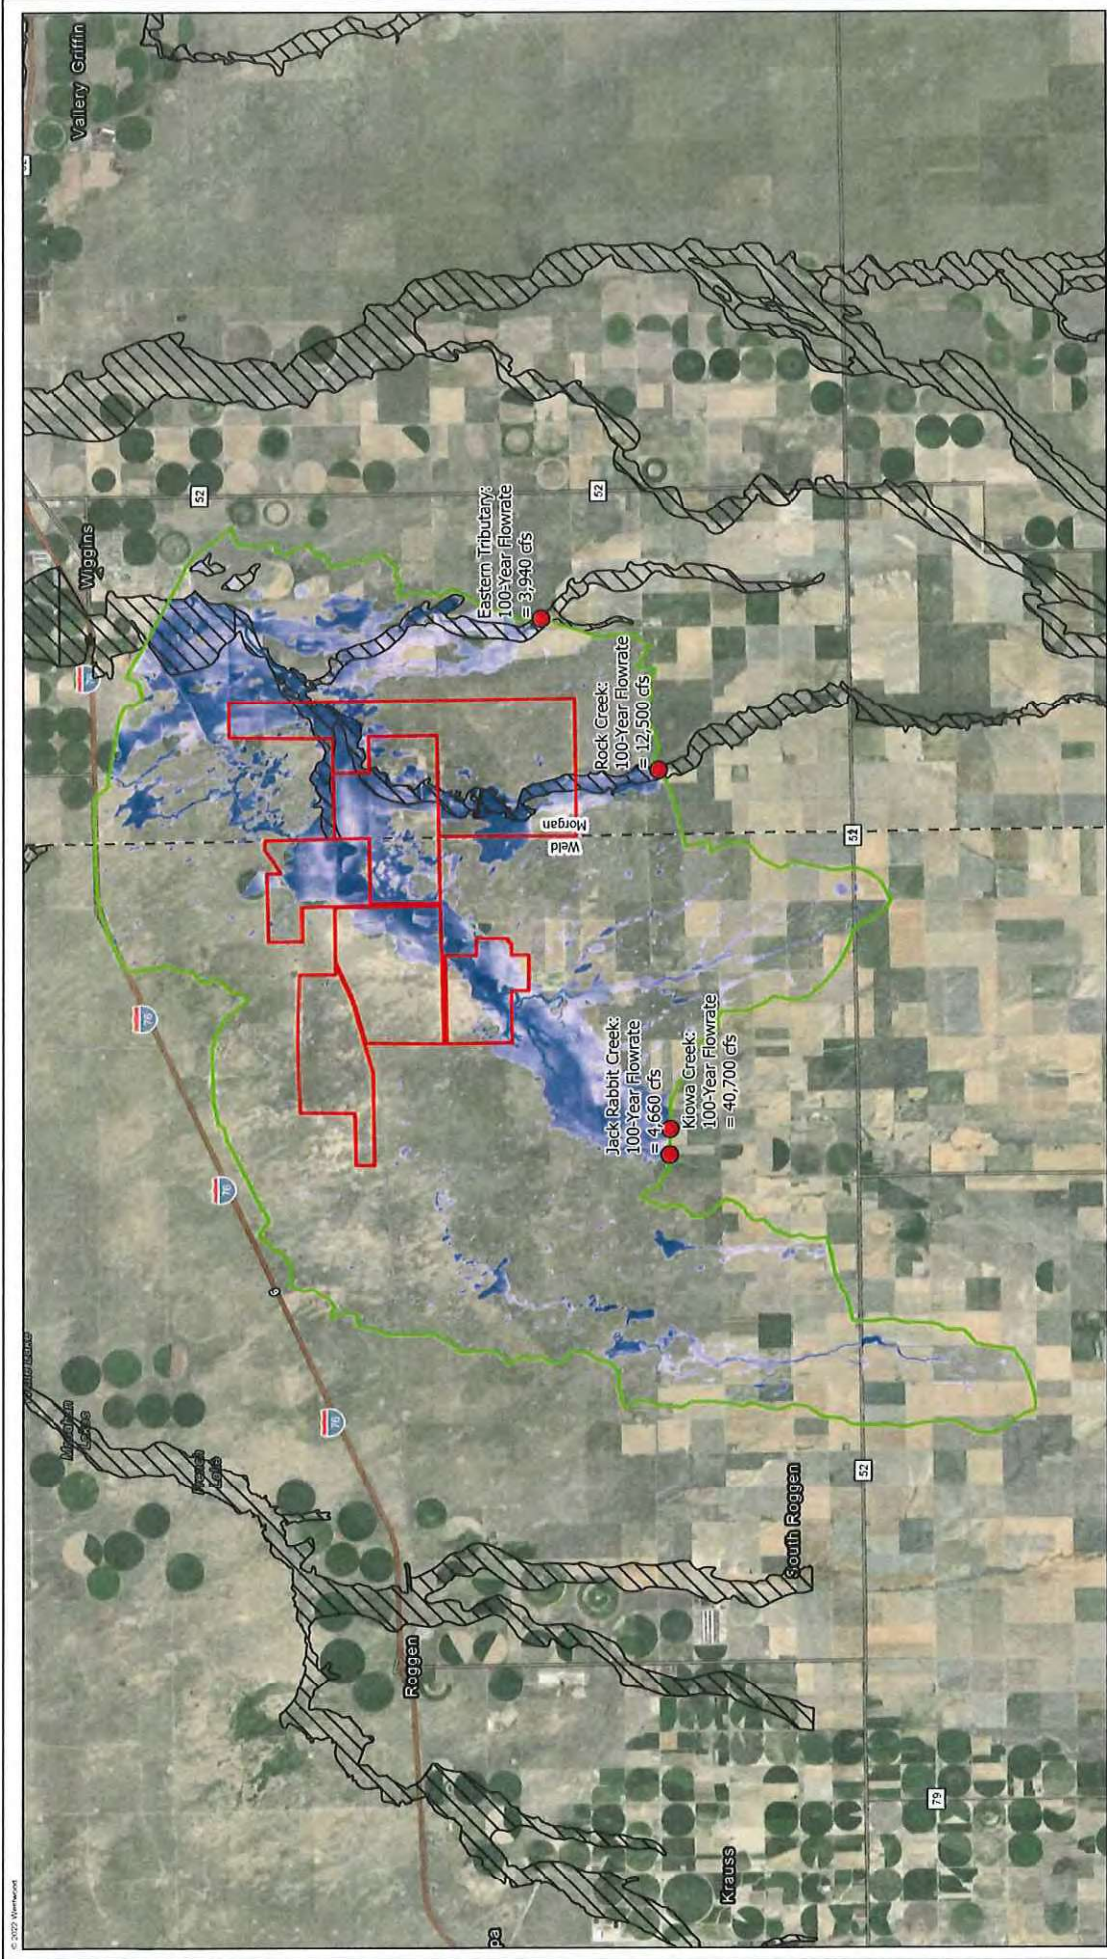

Taelor Solar Project

Weld and Morgan Counties, Colorado

Exhibit 7: 100-Year Max Water Depth Map

February 7, 2022




Legend

	Project Boundary - Phases 1 & 2		Inflow Location
	FLO-2D Boundary		
	County Boundary		
	FEMA Zone A		

Max Water Depth (ft)	
	0.50 - 1.00
	1.01 - 1.50
	1.51 - 2.00
	2.01 - 2.50
	2.51 - 3.00
	3.01 - 4.00
	4.01 - 6.00
	6.01 +

Data Sources: Westwood (2022), Esri (2022),
 Borealis Property (Acquired 2022), USGS
 (2022), FEMA (2021), USGS (2022)

Westwood
 Tell Free (888) 937-5150 westwood.com

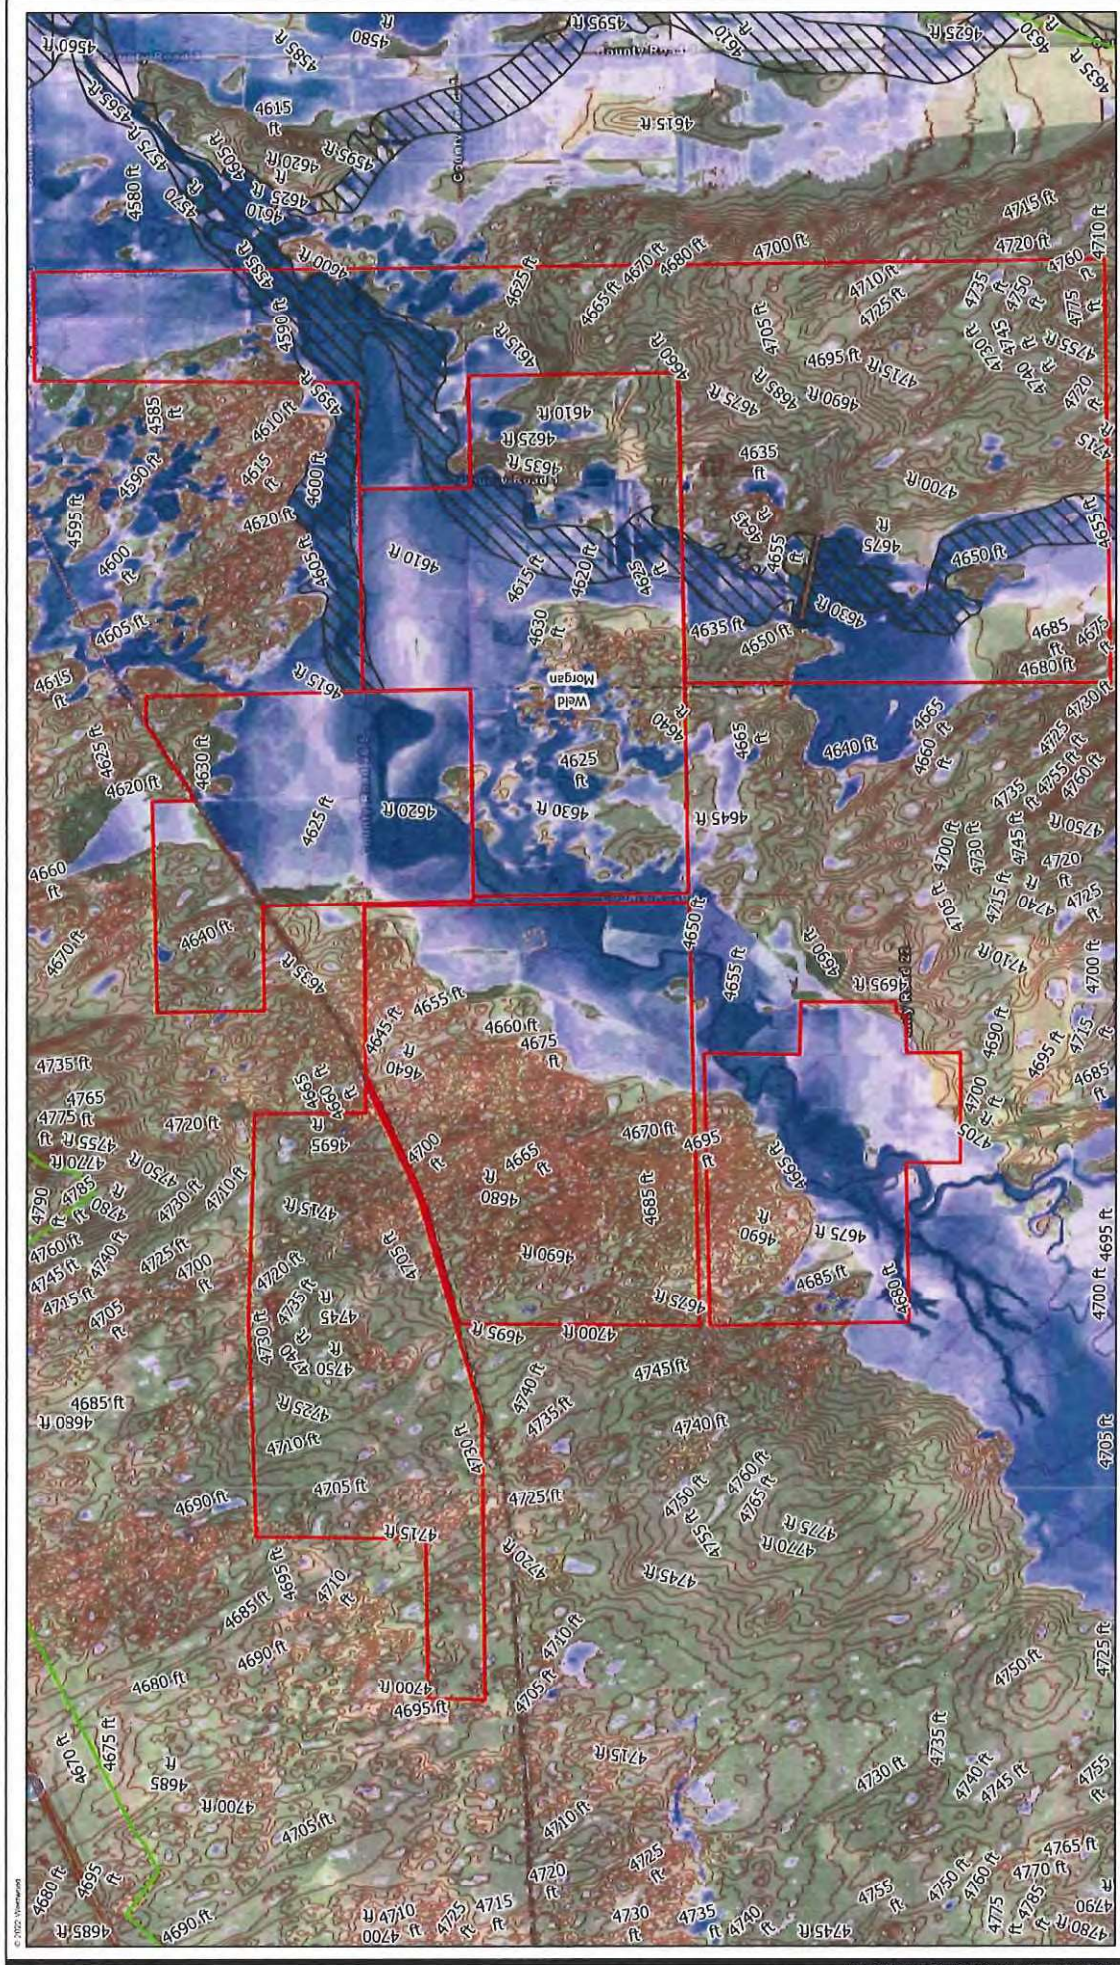


Taelor Solar Project

Weld and Morgan Counties, Colorado


Exhibit 7A: 100-Year Max Water Depth Project Area Map

February 7, 2022



Westwood
 Toll Free (888) 937-5150 westwood.com

© 2022 Westwood

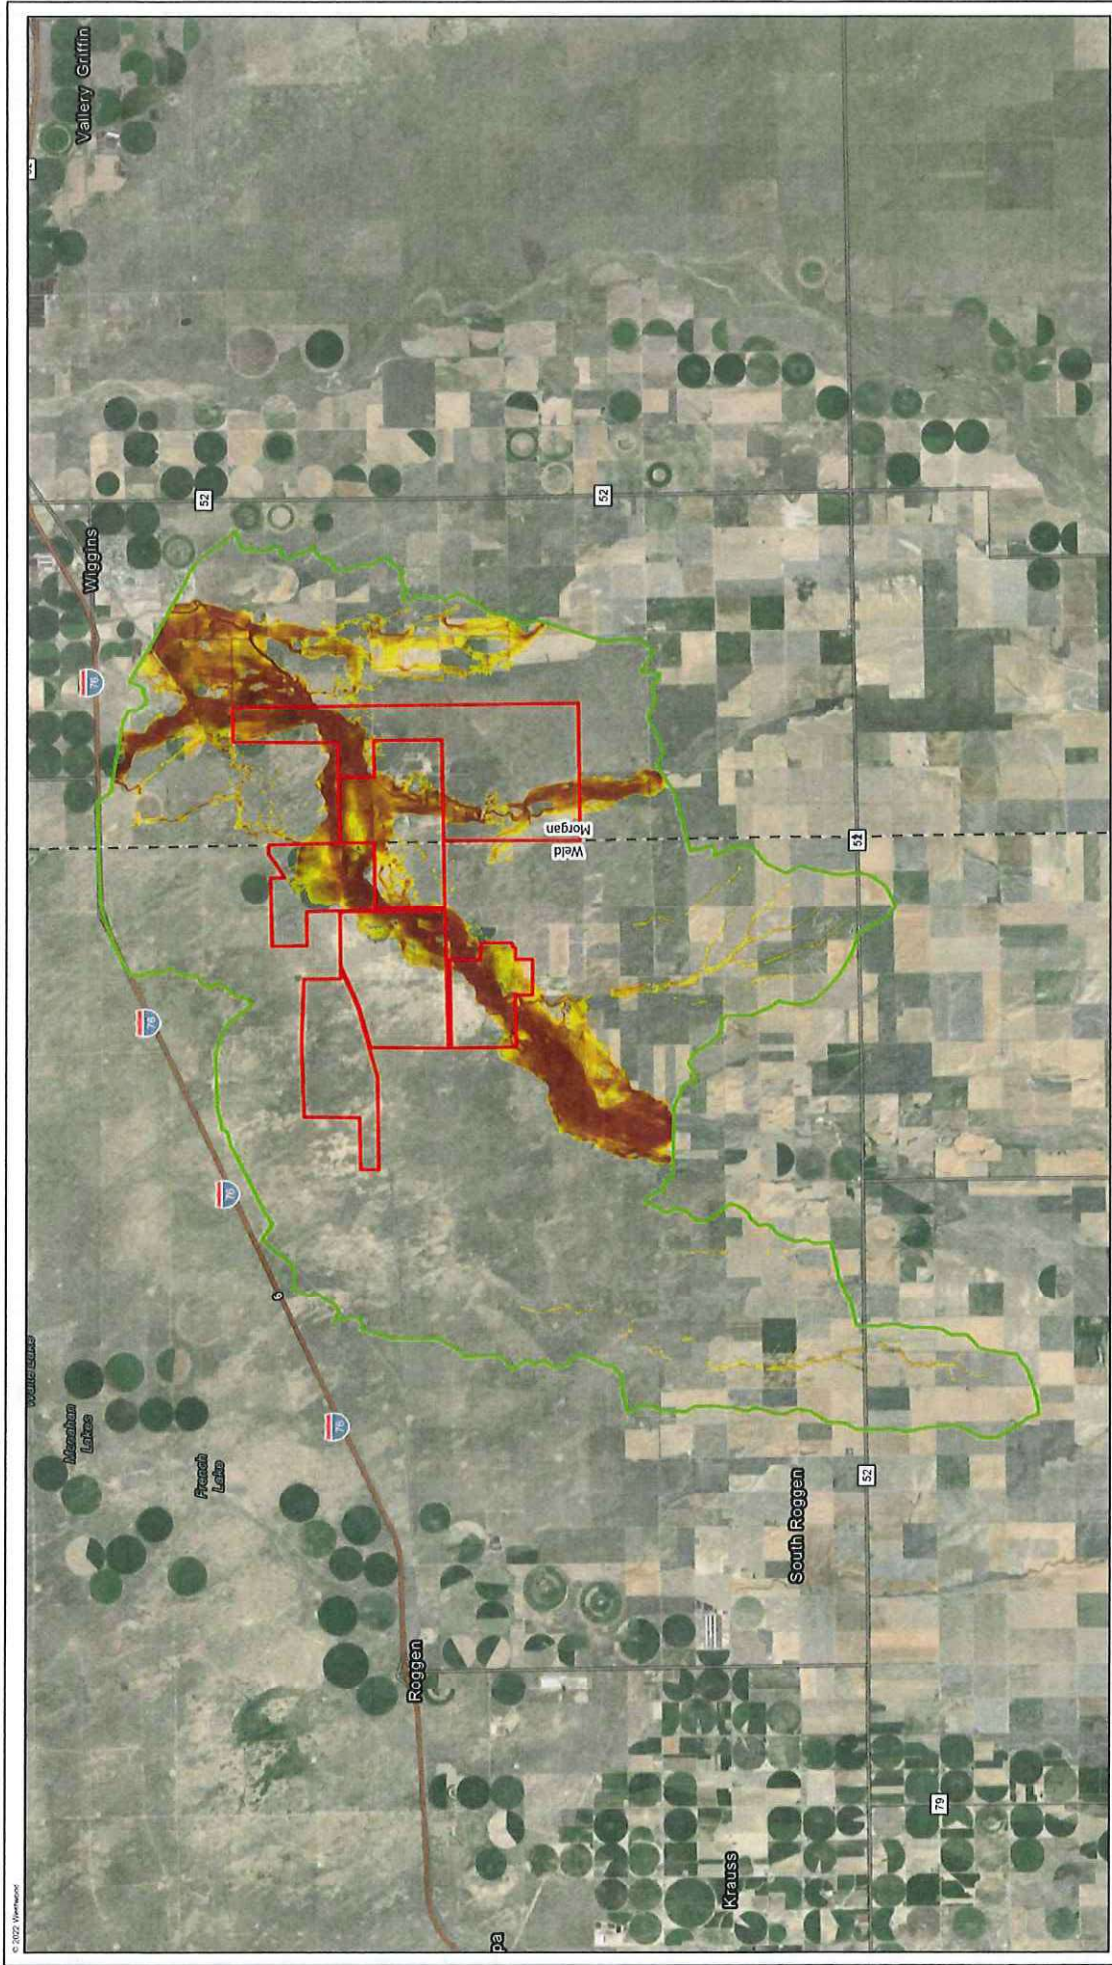

Taelor Solar Project

Weld and Morgan Counties, Colorado


Exhibit 8: 100-Year Peak Velocity Map

February 7, 2022



Westwood
Toll Free (888) 937-5150 westwoodps.com

Date: Sources: Westwood (2/22), EIR: WWS
 Base Map: Imagery: AerialView 2022, USGS
 FDOT: FEMA (2021), USGS (2021)

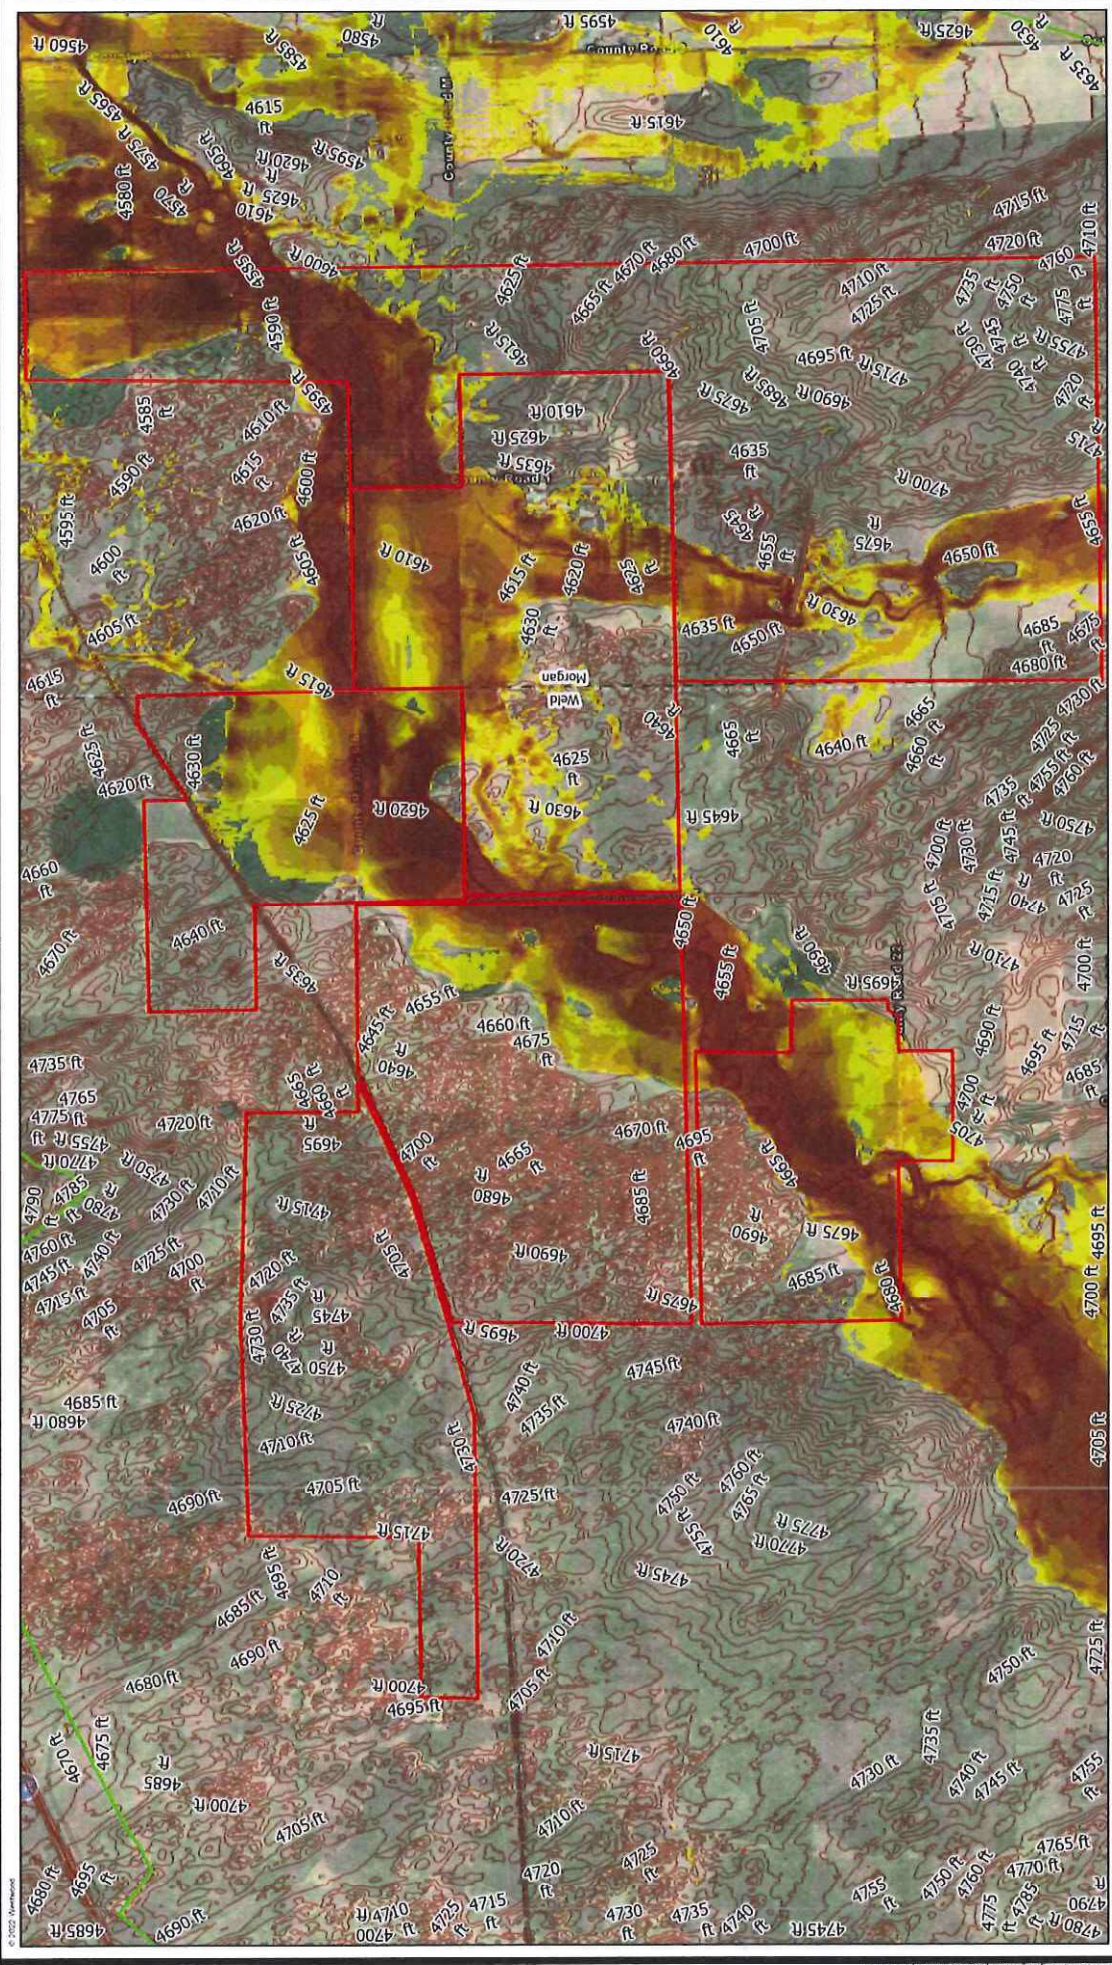

Taelor Solar Project

Weid and Morgan Counties, Colorado

Exhibit 8A: 100-Year Peak Velocity Project Area Map


February 7, 2022



- Legend**
- Project Boundary- Phases 1 & 2
 - FLO-2D Boundary
 - County Boundary
 - 5-foot Contours

Data Source: Westwood (2022) Geo IM5
 Base Map: Imagery, Incorporated, 2022, USGS
 Contour: (2022) 5-foot (1:25,000)

Westwood
 Toll Free: (888) 937-5150 westwood.com

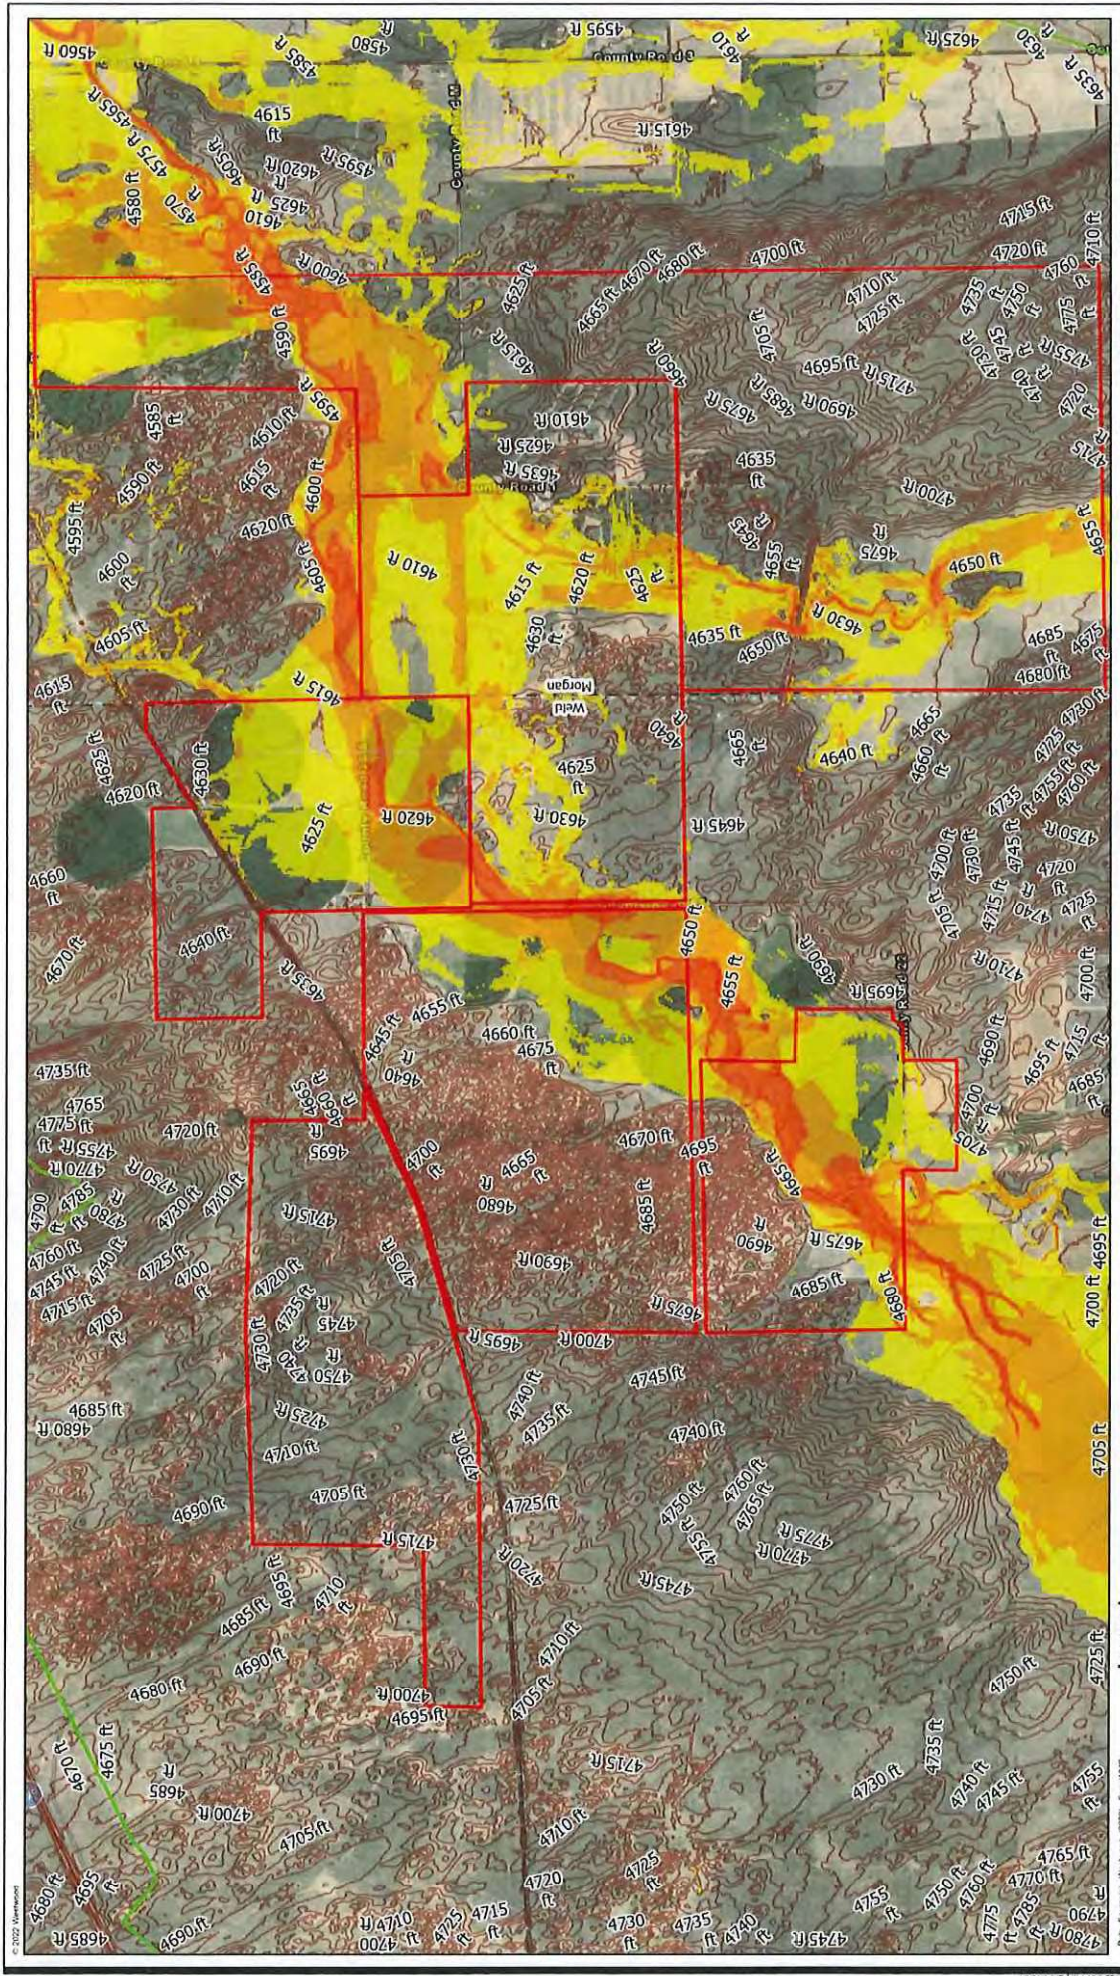

Taylor Solar Project


Weld and Morgan Counties, Colorado

Exhibit 9: 100-Year Scour Map
February 7, 2022



Westwood
Toll Free (888) 937-5150 westwoodcs.com

Data Sources: Westwood (2022) Bar, WMS
Barringer, Inventory, Intersected, 2022; USGS
2020; 1:24,000; USGS (2021)

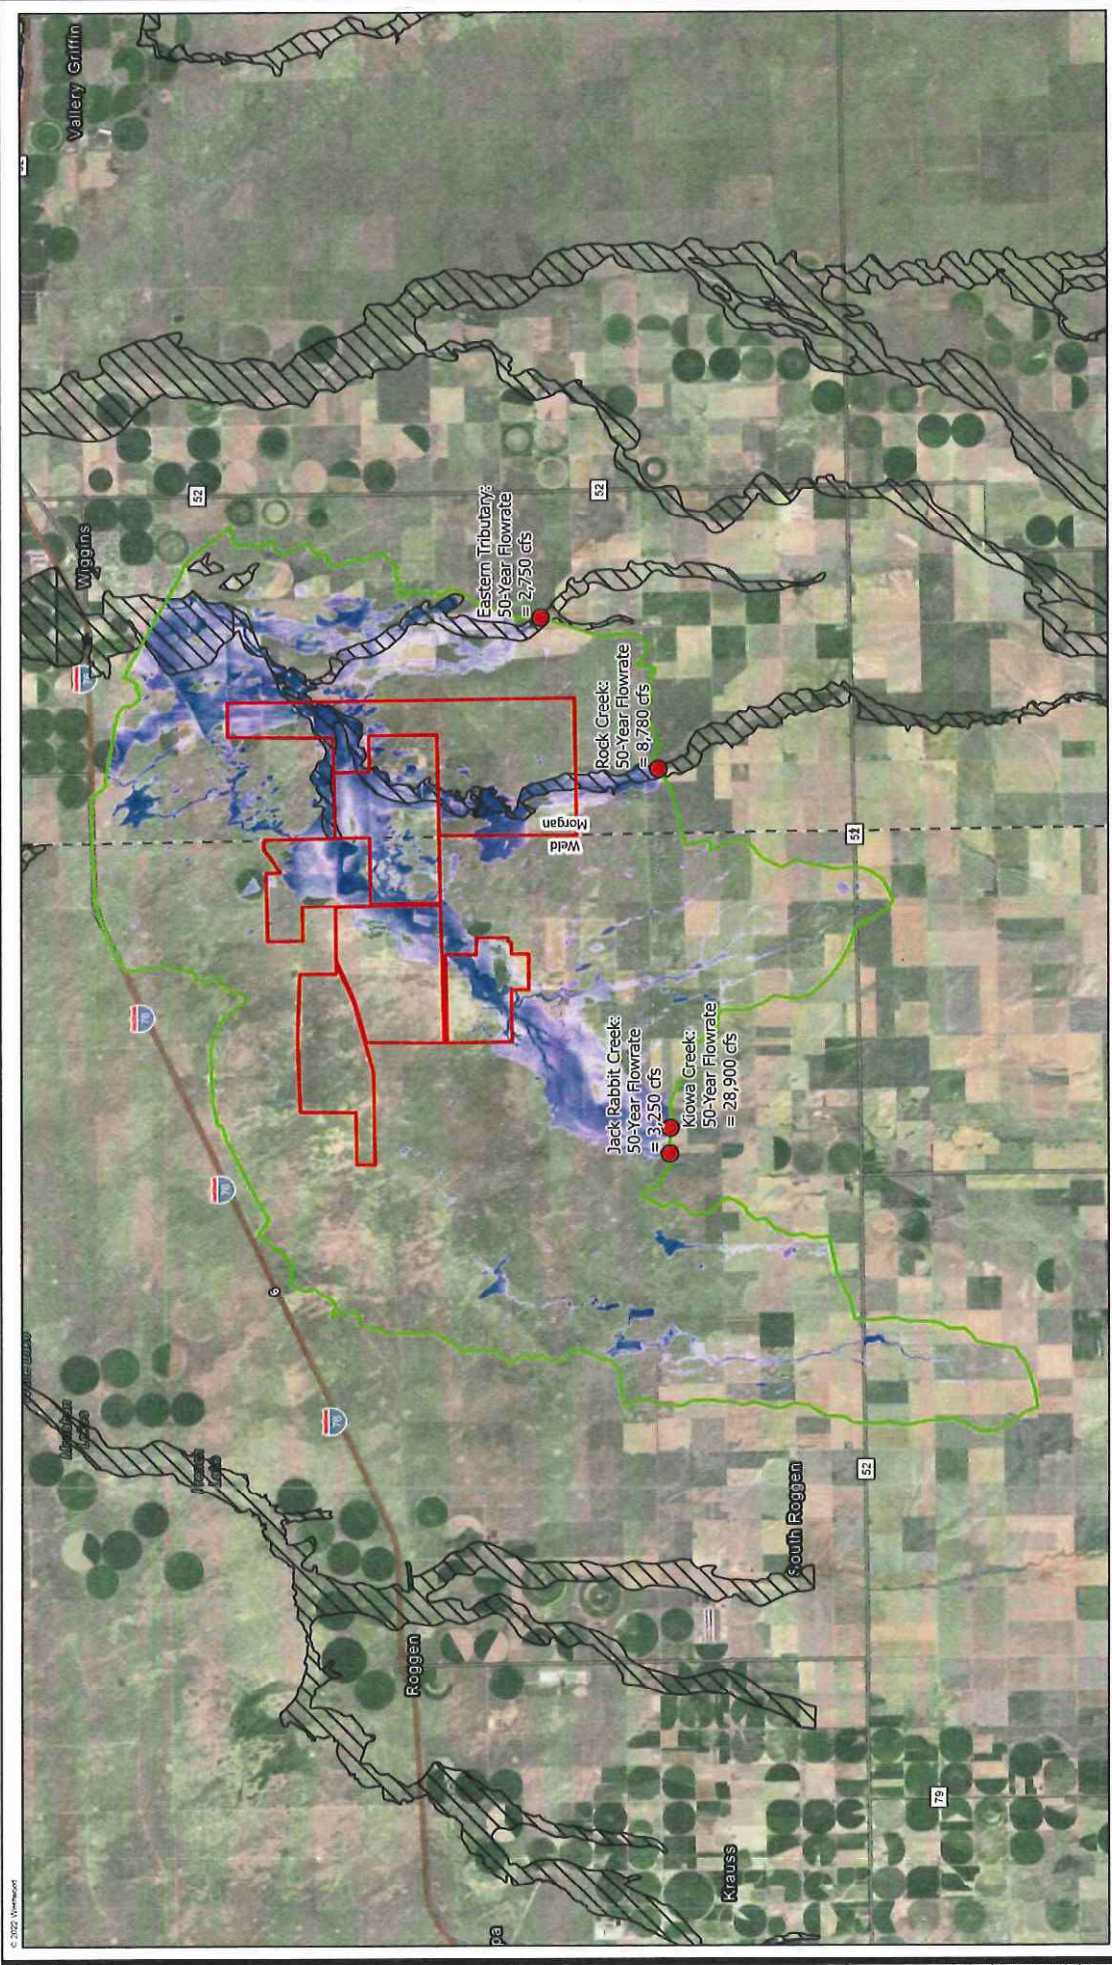

Taelor Solar Project

Weld and Morgan Counties, Colorado

Exhibit 10: 50-Year Max Water Depth Map

February 7, 2022



Legend

- Project Boundary- Phases 1 & 2
- FLO-2D Boundary
- County Boundary
- FEMA Zone A
- Inflow Location


Max Water Depth (ft)	
0.50 - 1.00	1.01 - 1.50
1.51 - 2.00	2.01 - 2.50
2.51 - 3.00	3.01 - 4.00
4.01 - 6.00	6.01 +

Westwood
 Toll Free (888) 937-5150 westwood.com


Data Sources: Westwood (2021), Eri (MAG), Esri, Imagery, Incensed, 2021, USGS (2021) FEMA (2021) USGS (2021)


Westwood

Toll Free (888) 937-5150 www.westwood.com



Taelor Solar Project
 Weld and Morgan Counties, Colorado
 Exhibit 10A: 50-Year Max Water
 Depth Project Area Map
 February 7, 2022

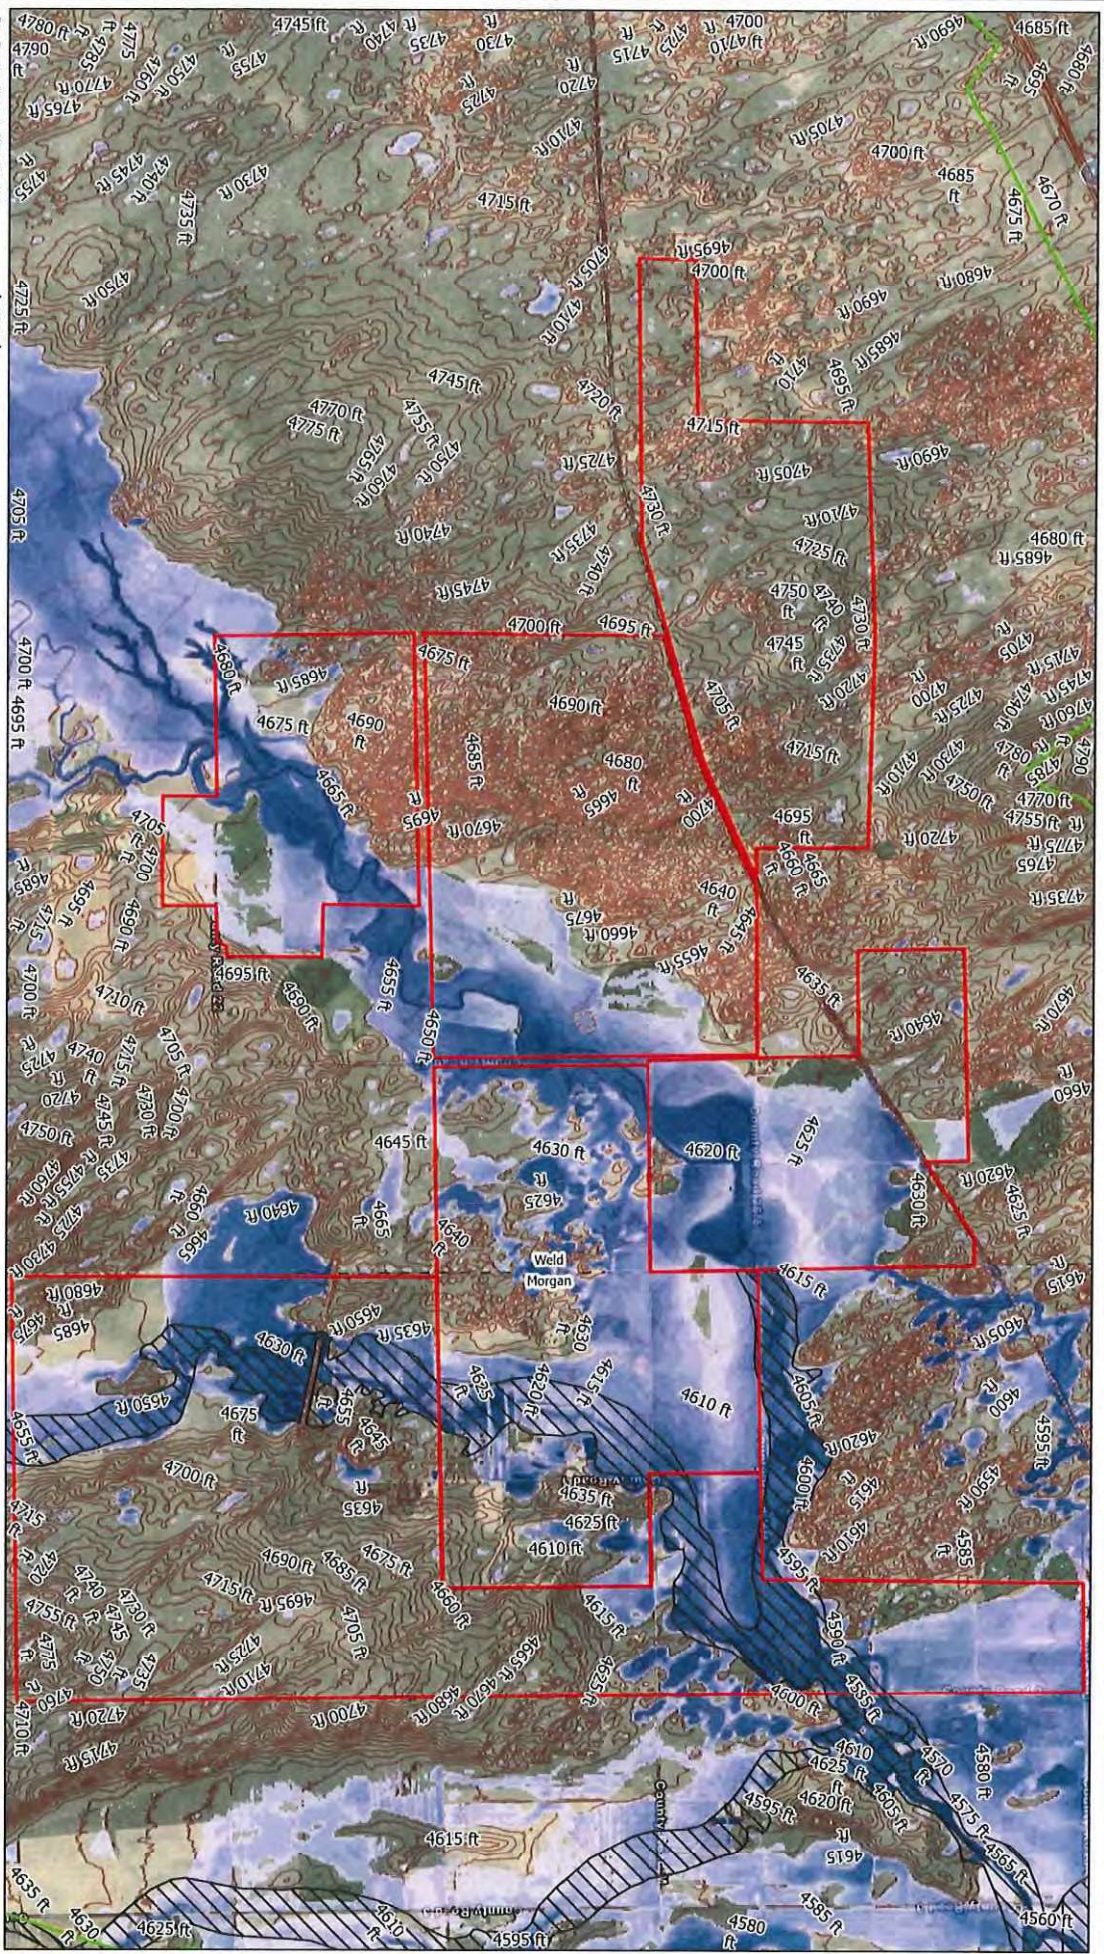

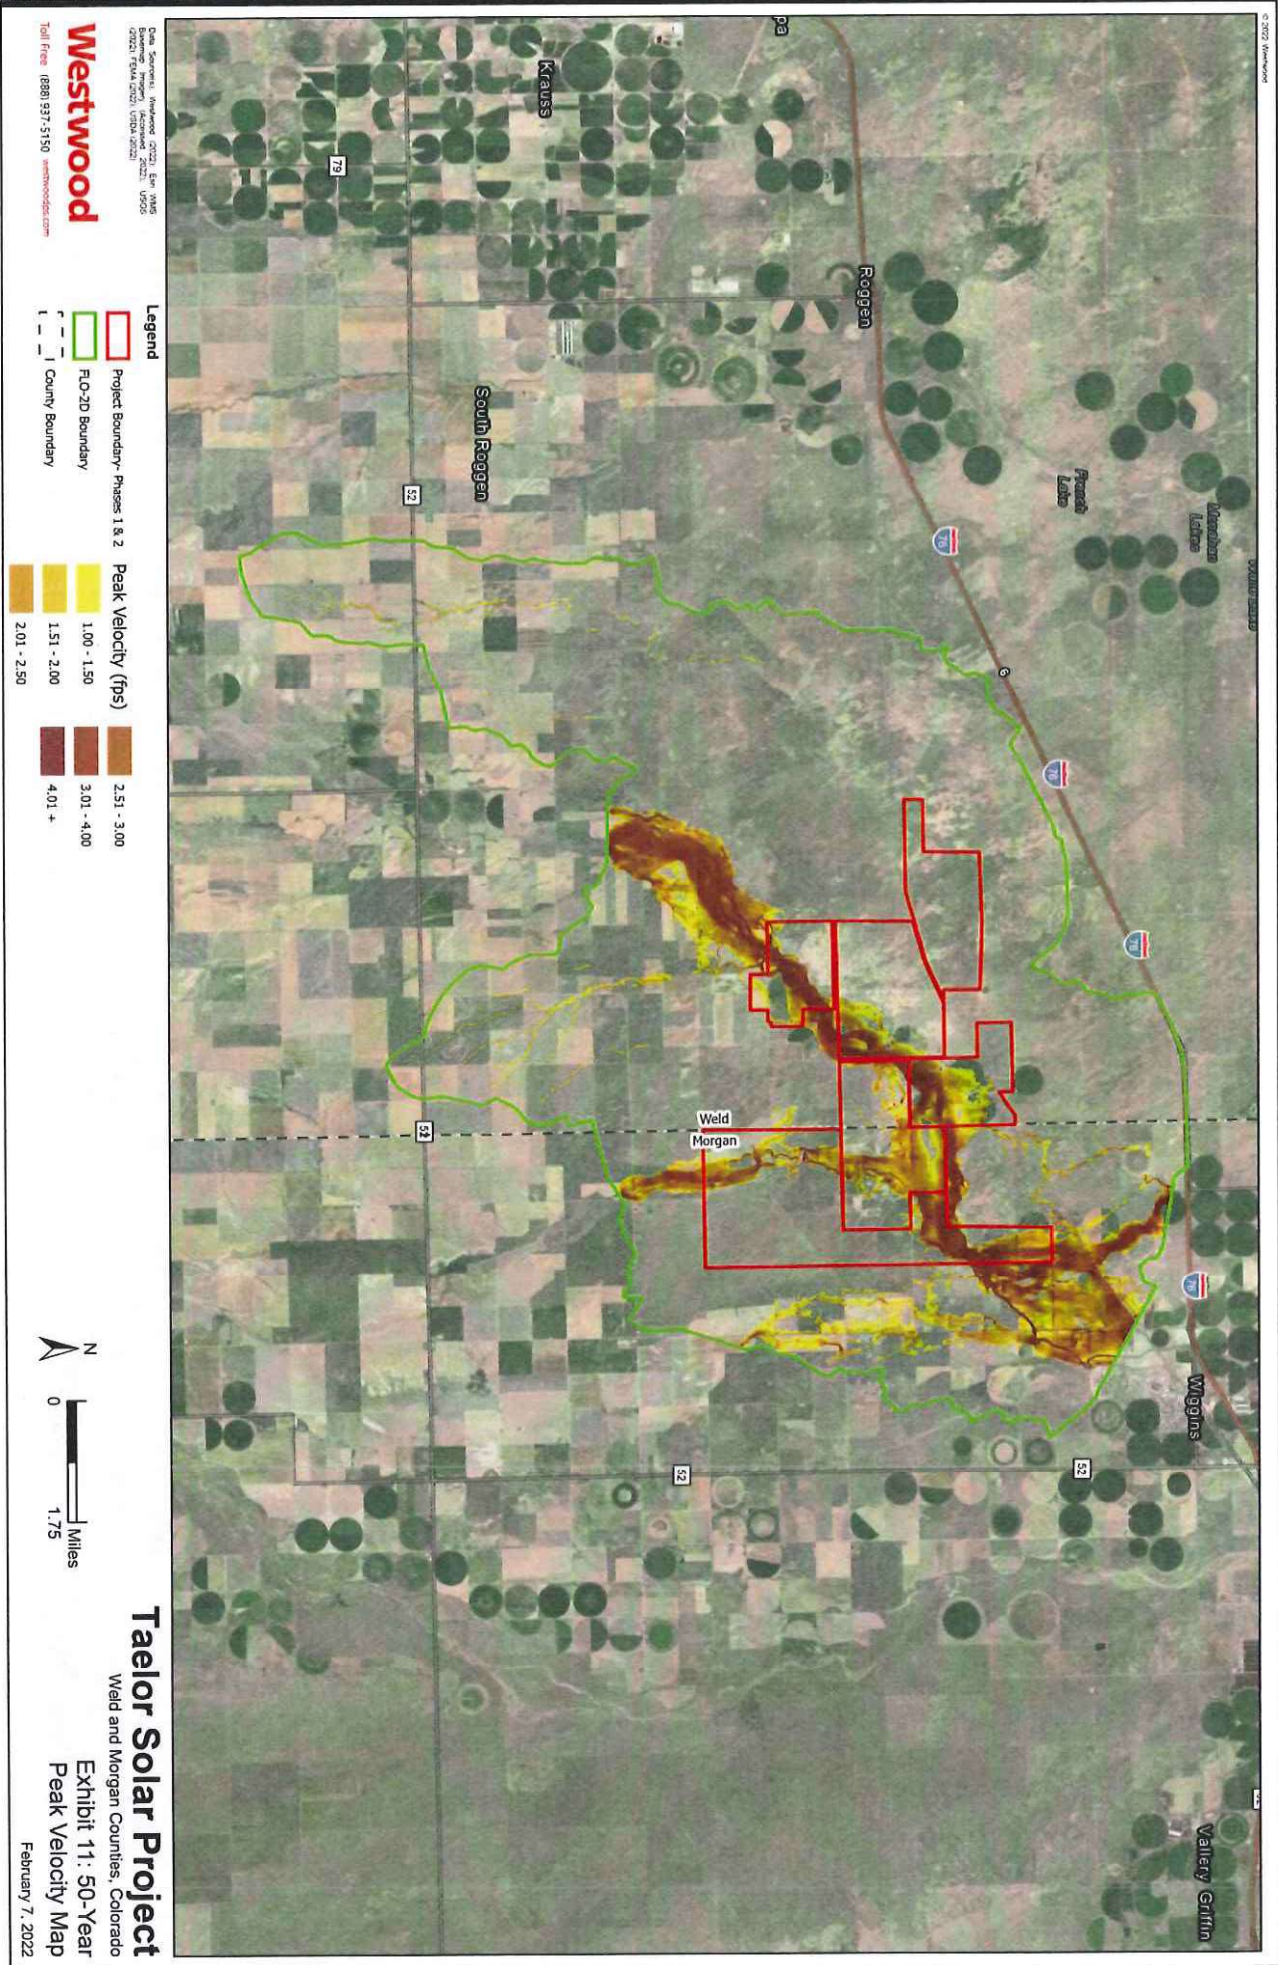

Westwood
 Data Services | Prepared: 2/20/22, 8:44 AM
 Executive Project | Reviewed: 2/22/22, 10:55 AM
 02/20/22 | P:\A\2/20/22 | G:\AP\overan

Toll free | (888) 937-5150 | westwood.com


Westwood
 Title: (888) 937-5150
 www.westwood.com


Legend
 Project Boundary - Phases 1 & 2
 FLO-3D Boundary
 County Boundary
 5-foot Contours

Peak Velocity (fps)
 1.00 - 1.50
 1.51 - 2.00
 2.01 - 2.50
 2.51 - 3.00
 3.01 - 4.00
 4.01 +

N
 0 3000 Feet

Taylor Solar Project
 Weld and Morgan Counties, Colorado
 Exhibit 11A: 50-Year Peak
 Velocity Project Area Map
 February 7, 2022

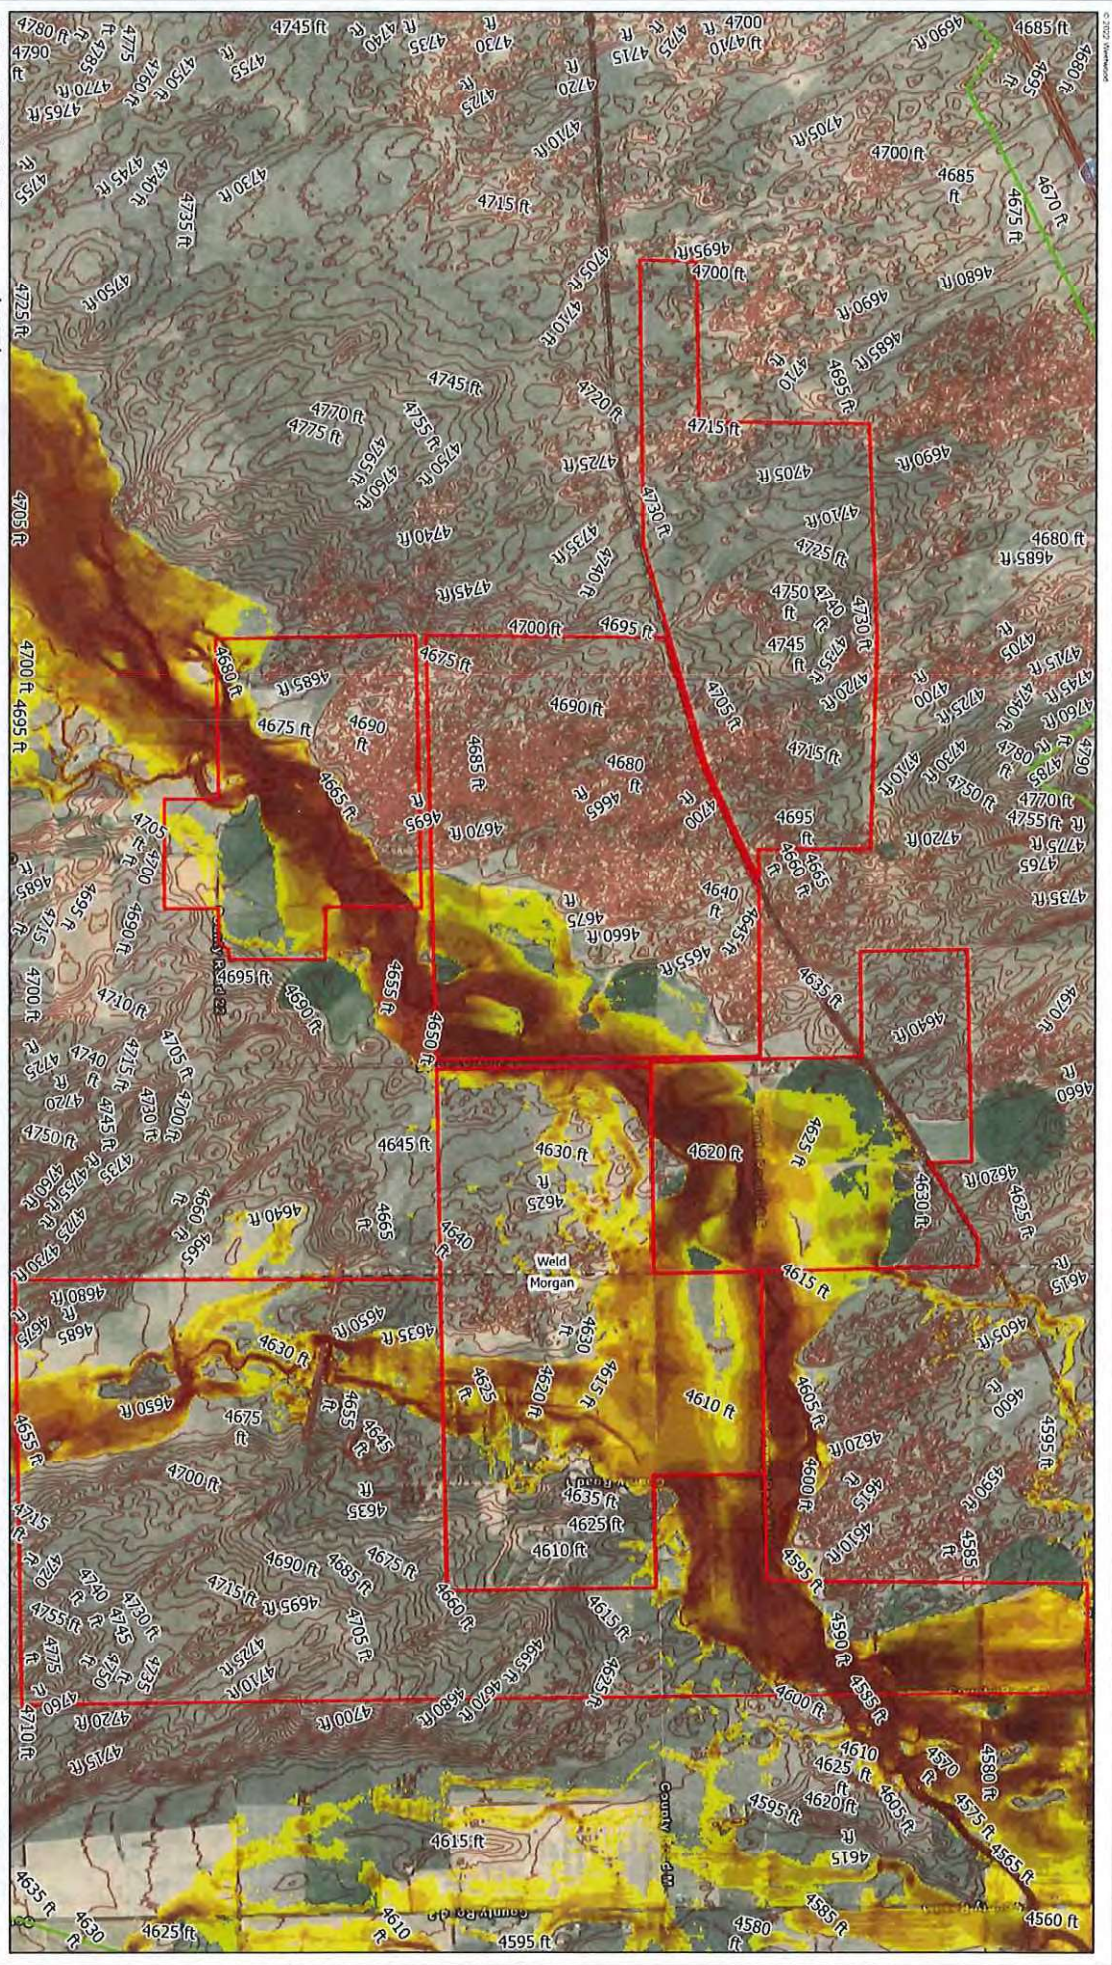

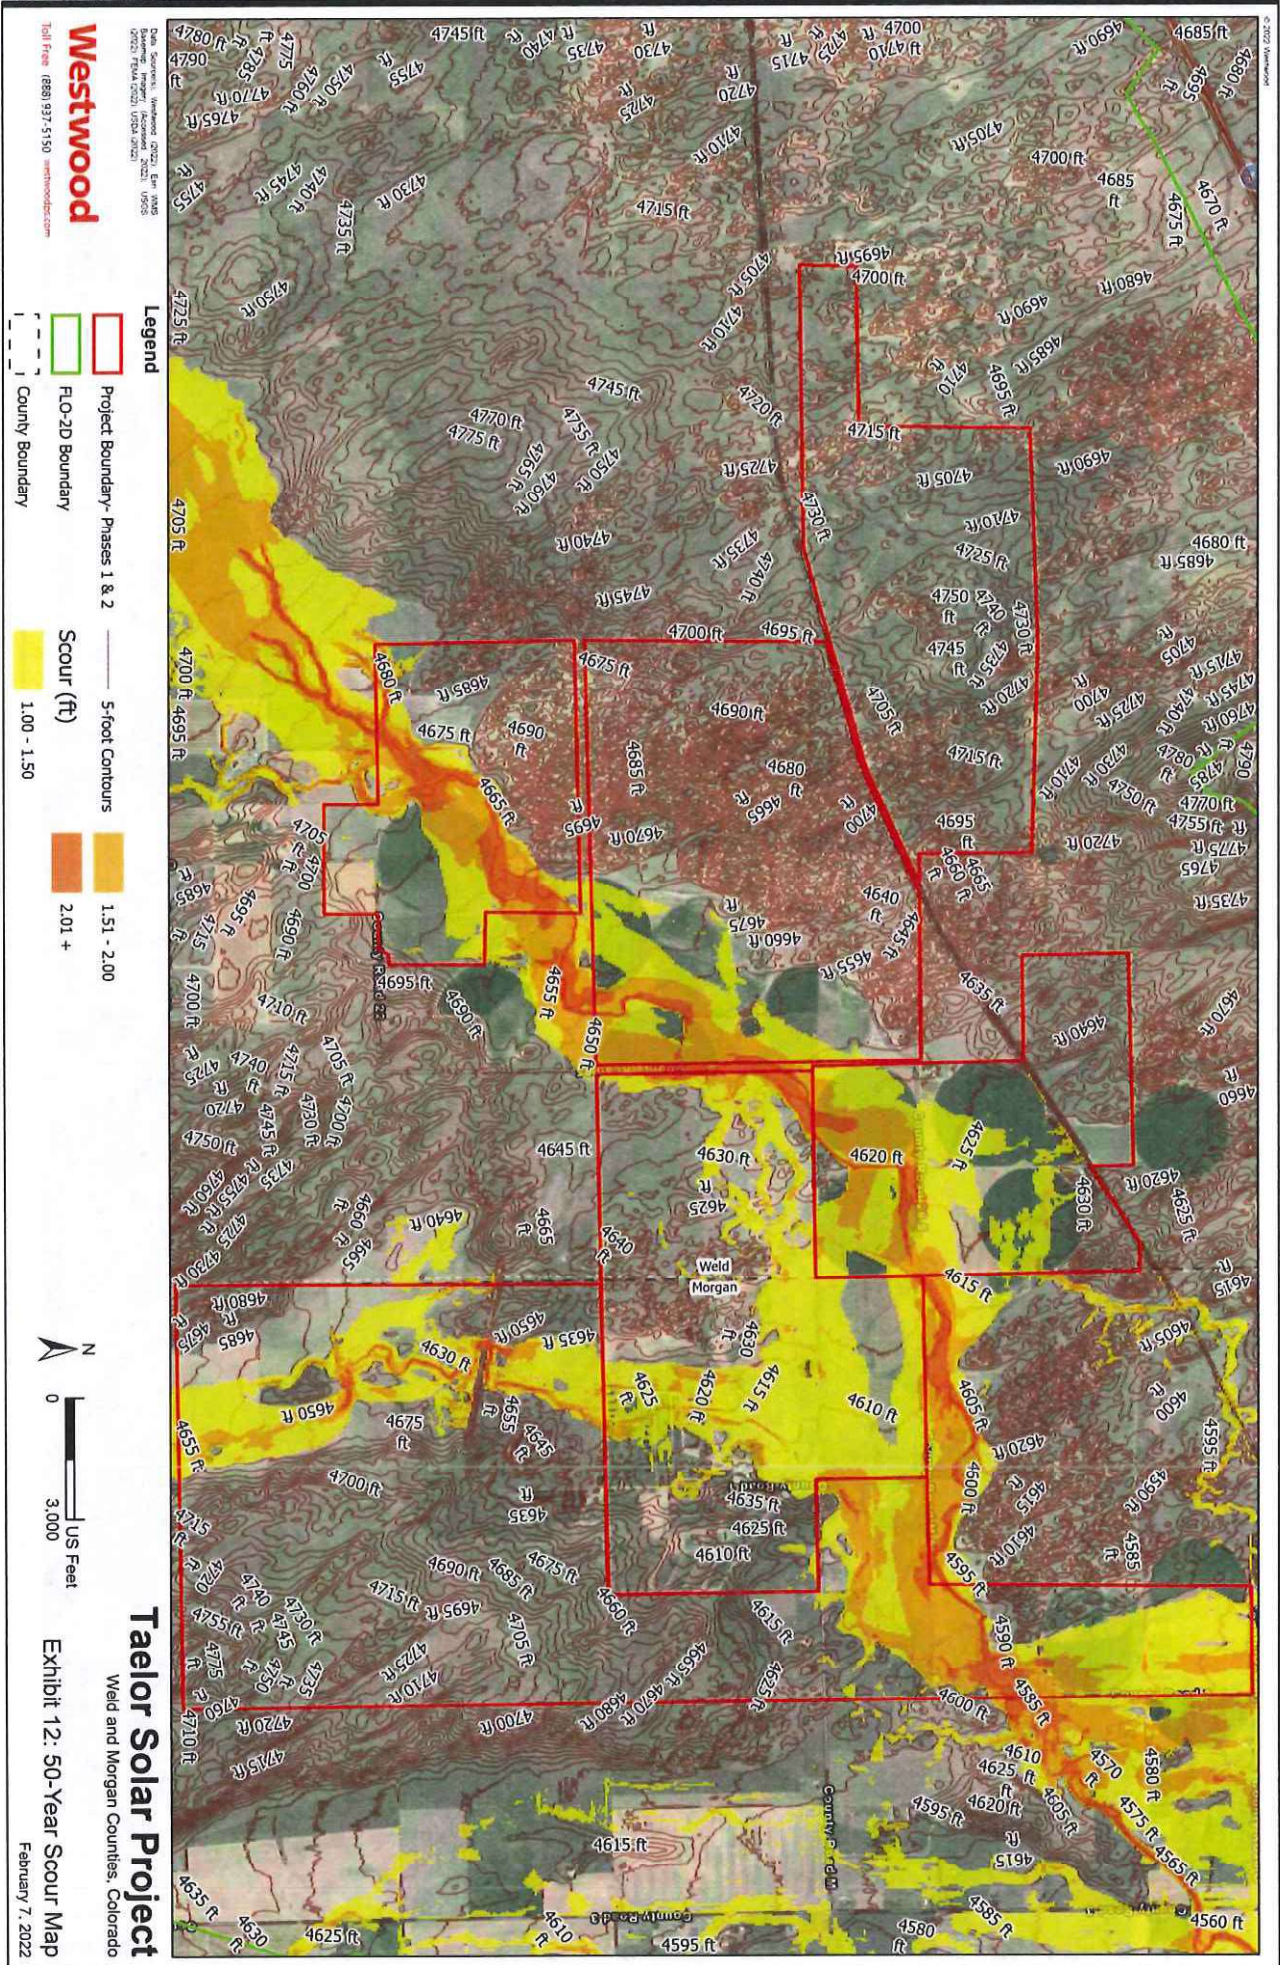

The background of the page is a topographic map with red contour lines on a dark brown background. A dashed red line runs vertically through the center, and a solid red dot is located near the bottom center. The text is overlaid on the upper portion of the map.

Appendix A

NOAA Atlas 14 Precipitation Data



NOAA Atlas 14, Volume 8, Version 2
 Location name: Wiggins, Colorado, USA*
 Latitude: 40.1686°, Longitude: -104.1629°
 Elevation: 4639.05 ft**
 * source: ESRI Maps
 ** source: USGS



POINT PRECIPITATION FREQUENCY ESTIMATES

Sanja Perica, Deborah Martin, Sandra Pavlovic, Ishani Roy, Michael St. Laurent, Carl Trypaluk, Dale Unruh, Michael Yekta, Geoffery Bonnin

NOAA, National Weather Service, Silver Spring, Maryland

[PF tabular](#) | [PF graphical](#) | [Maps & aerals](#)

PF tabular


PDS-based point precipitation frequency estimates with 90% confidence intervals (in inches)¹										
Duration	Average recurrence interval (years)									
	1	2	5	10	25	50	100	200	500	1000
5-min	0.257 (0.206-0.325)	0.311 (0.248-0.393)	0.410 (0.326-0.519)	0.503 (0.398-0.640)	0.648 (0.503-0.868)	0.773 (0.582-1.04)	0.909 (0.661-1.25)	1.06 (0.738-1.49)	1.27 (0.854-1.83)	1.45 (0.942-2.09)
10-min	0.377 (0.301-0.476)	0.455 (0.363-0.575)	0.600 (0.477-0.760)	0.736 (0.582-0.937)	0.948 (0.736-1.27)	1.13 (0.853-1.53)	1.33 (0.968-1.83)	1.55 (1.08-2.18)	1.87 (1.25-2.68)	2.13 (1.38-3.06)
15-min	0.460 (0.367-0.581)	0.555 (0.443-0.702)	0.731 (0.582-0.927)	0.898 (0.710-1.14)	1.16 (0.898-1.55)	1.38 (1.04-1.86)	1.62 (1.18-2.23)	1.89 (1.32-2.65)	2.28 (1.53-3.27)	2.59 (1.68-3.73)
30-min	0.612 (0.489-0.774)	0.738 (0.589-0.933)	0.971 (0.772-1.23)	1.19 (0.942-1.52)	1.53 (1.19-2.05)	1.83 (1.38-2.46)	2.15 (1.56-2.95)	2.50 (1.75-3.51)	3.01 (2.02-4.32)	3.43 (2.23-4.93)
60-min	0.754 (0.602-0.953)	0.904 (0.722-1.14)	1.19 (0.945-1.51)	1.46 (1.16-1.86)	1.89 (1.47-2.54)	2.26 (1.71-3.05)	2.67 (1.95-3.68)	3.12 (2.18-4.39)	3.78 (2.54-5.43)	4.32 (2.81-6.22)
2-hr	0.896 (0.721-1.12)	1.07 (0.861-1.34)	1.41 (1.13-1.77)	1.73 (1.38-2.18)	2.25 (1.76-3.00)	2.70 (2.05-3.61)	3.19 (2.35-4.36)	3.75 (2.64-5.23)	4.55 (3.08-6.49)	5.22 (3.42-7.44)
3-hr	0.977 (0.790-1.22)	1.16 (0.939-1.45)	1.52 (1.23-1.90)	1.87 (1.50-2.35)	2.43 (1.92-3.24)	2.93 (2.24-3.91)	3.48 (2.57-4.73)	4.09 (2.89-5.68)	4.98 (3.39-7.06)	5.72 (3.76-8.11)
6-hr	1.13 (0.920-1.40)	1.34 (1.09-1.66)	1.75 (1.42-2.17)	2.14 (1.72-2.66)	2.76 (2.19-3.62)	3.30 (2.54-4.35)	3.89 (2.90-5.24)	4.55 (3.25-6.26)	5.51 (3.78-7.74)	6.30 (4.18-8.86)
12-hr	1.31 (1.08-1.61)	1.57 (1.28-1.92)	2.03 (1.66-2.49)	2.45 (1.99-3.02)	3.09 (2.46-3.99)	3.63 (2.81-4.72)	4.22 (3.15-5.59)	4.85 (3.48-6.58)	5.76 (3.98-7.99)	6.50 (4.35-9.05)
24-hr	1.56 (1.29-1.89)	1.82 (1.51-2.21)	2.30 (1.90-2.80)	2.74 (2.24-3.34)	3.40 (2.72-4.33)	3.95 (3.08-5.08)	4.54 (3.43-5.96)	5.19 (3.76-6.96)	6.10 (4.25-8.37)	6.84 (4.62-9.44)
2-day	1.79 (1.50-2.16)	2.10 (1.75-2.52)	2.62 (2.18-3.16)	3.09 (2.55-3.74)	3.77 (3.03-4.74)	4.33 (3.40-5.49)	4.92 (3.74-6.37)	5.55 (4.05-7.36)	6.43 (4.51-8.72)	7.14 (4.87-9.76)
3-day	1.96 (1.64-2.35)	2.27 (1.90-2.71)	2.79 (2.33-3.35)	3.26 (2.70-3.92)	3.95 (3.19-4.93)	4.51 (3.56-5.69)	5.11 (3.90-6.58)	5.75 (4.21-7.57)	6.63 (4.68-8.95)	7.34 (5.04-9.99)
4-day	2.09 (1.76-2.49)	2.40 (2.01-2.86)	2.93 (2.45-3.50)	3.40 (2.83-4.07)	4.09 (3.32-5.08)	4.66 (3.68-5.84)	5.25 (4.02-6.73)	5.89 (4.33-7.72)	6.78 (4.80-9.10)	7.48 (5.15-10.1)
7-day	2.38 (2.01-2.81)	2.72 (2.30-3.22)	3.31 (2.78-3.92)	3.81 (3.19-4.53)	4.52 (3.67-5.54)	5.09 (4.04-6.31)	5.67 (4.36-7.19)	6.28 (4.64-8.15)	7.11 (5.07-9.45)	7.76 (5.39-10.4)
10-day	2.63 (2.23-3.09)	3.01 (2.56-3.55)	3.65 (3.09-4.31)	4.19 (3.52-4.96)	4.93 (4.01-5.99)	5.51 (4.39-6.78)	6.09 (4.70-7.66)	6.69 (4.96-8.61)	7.49 (5.35-9.88)	8.09 (5.64-10.8)
20-day	3.41 (2.92-3.97)	3.89 (3.32-4.53)	4.66 (3.97-5.44)	5.29 (4.48-6.20)	6.13 (5.02-7.35)	6.77 (5.43-8.23)	7.40 (5.75-9.18)	8.02 (5.99-10.2)	8.83 (6.36-11.5)	9.42 (6.63-12.5)
30-day	4.06 (3.49-4.70)	4.61 (3.96-5.35)	5.50 (4.71-6.39)	6.21 (5.29-7.25)	7.16 (5.89-8.52)	7.86 (6.33-9.48)	8.54 (6.67-10.5)	9.21 (6.91-11.6)	10.0 (7.27-13.0)	10.7 (7.54-14.0)
45-day	4.86 (4.20-5.60)	5.53 (4.77-6.37)	6.58 (5.66-7.60)	7.41 (6.34-8.59)	8.49 (7.00-10.0)	9.28 (7.50-11.1)	10.0 (7.85-12.3)	10.7 (8.09-13.4)	11.6 (8.44-14.9)	12.2 (8.70-16.0)
60-day	5.52 (4.79-6.34)	6.30 (5.45-7.23)	7.50 (6.47-8.62)	8.43 (7.25-9.74)	9.64 (7.97-11.3)	10.5 (8.51-12.5)	11.3 (8.88-13.7)	12.0 (9.11-15.0)	12.9 (9.44-16.5)	13.6 (9.69-17.7)

¹ Precipitation frequency (PF) estimates in this table are based on frequency analysis of partial duration series (PDS). Numbers in parenthesis are PF estimates at lower and upper bounds of the 90% confidence interval. The probability that precipitation frequency estimates (for a given duration and average recurrence interval) will be greater than the upper bound (or less than the lower bound) is 5%. Estimates at upper bounds are not checked against probable maximum precipitation (PMP) estimates and may be higher than currently valid PMP values. Please refer to NOAA Atlas 14 document for more information.


[Back to Top](#)

PF graphical

PDS-based depth-duration-frequency (DDF) curves
 Latitude: 40.1686°, Longitude: -104.1629°

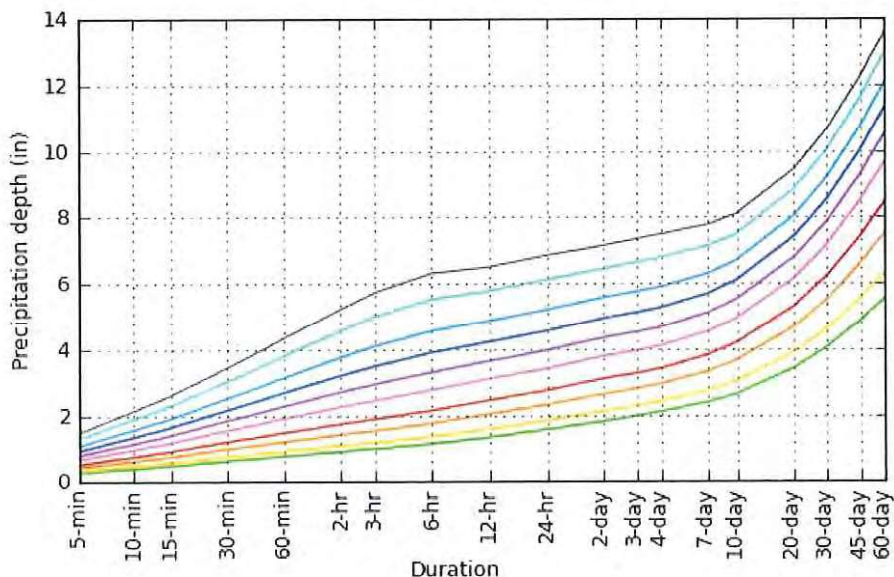


Average recurrence interval (years)
1
2
5
10
25
50
100
200
500
1000

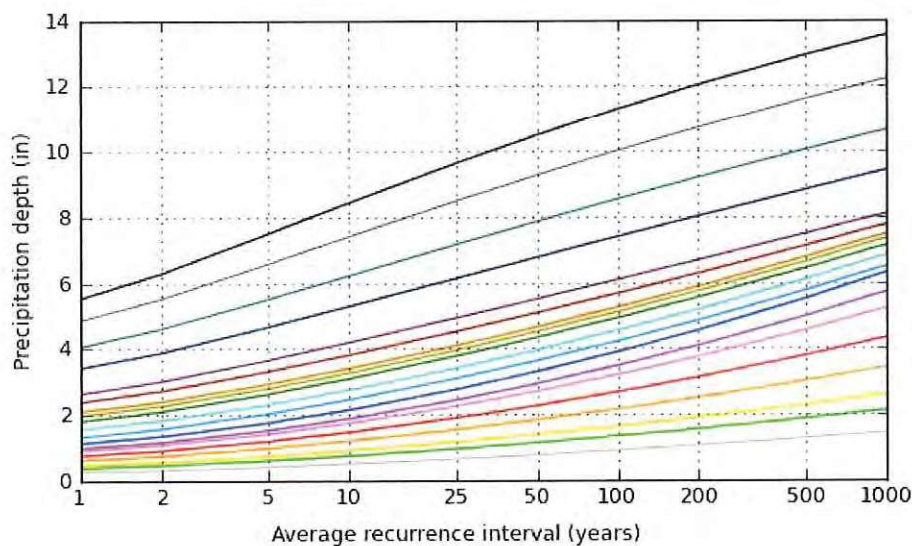

Duration
5-min
10-min
15-min
30-min
60-min
2-hr
3-hr
6-hr
12-hr
24-hr
2-day
3-day
4-day
7-day
10-day
20-day
30-day
45-day
60-day

Maps & aeriels

Small scale terrain

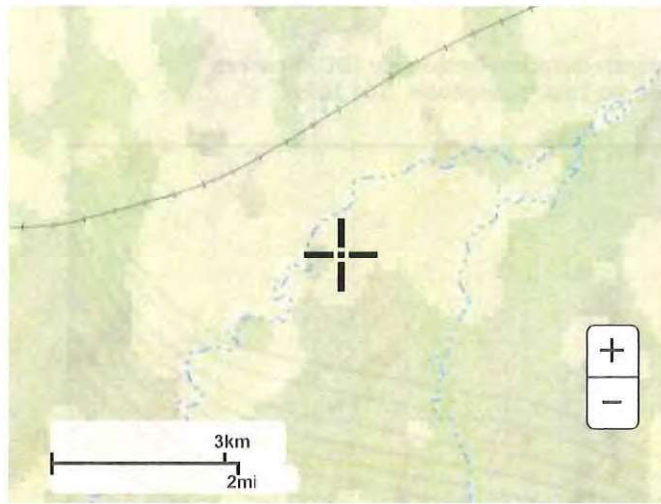

Large scale terrain



Large scale map



Large scale aerial



[Back to Top](#)

[US Department of Commerce](#)
[National Oceanic and Atmospheric Administration](#)
[National Weather Service](#)
[National Water Center](#)
1325 East West Highway
Silver Spring, MD 20910
Questions?: HDSC.Questions@noaa.gov

[Disclaimer](#)

The background of the page is a topographic map with red contour lines on a dark brown background. A dashed red line runs vertically through the center of the map. A small red 'x' is located on the dashed line in the upper-middle section, and a solid red dot is located on the dashed line in the lower-middle section.

Appendix B

Curve Number Table

Table 2. Semi-Arid Curve Numbers (adapted from NEH 650)

Class	Value	Classification Description	Curve Number						
			Soil Type*						
			A	B	C	D	W		
Water	11	Open Water - areas of open water, generally with less than 25% cover of vegetation or soil.	98	98	98	98	98	98	100
	12	Perennial Ice/Snow - areas characterized by a perennial cover of ice and/or snow, generally greater than 25% of total cover.	98	98	98	98	98	98	100
Developed	21	Developed, Open Space - areas with a mixture of some constructed materials, but mostly vegetation in the form of lawn grasses. Impervious surfaces account for less than 20% of total cover. These areas most commonly include large-lot single-family housing units, parks, golf courses, and vegetation planted in developed settings for recreation, erosion control, or aesthetic purposes.	46	65	77	82	82	100	
	22	Developed, Low Intensity - areas with a mixture of constructed materials and vegetation. Impervious surfaces account for 20% to 49% percent of total cover. These areas most commonly include single-family housing units.	61	75	83	87	87	100	
Developed	23	Developed, Medium Intensity - areas with a mixture of constructed materials and vegetation. Impervious surfaces account for 50% to 79% of the total cover. These areas most commonly include single-family housing units.	77	85	90	95	95	100	
	24	Developed High Intensity - highly developed areas where people reside or work in high numbers. Examples include apartment complexes, row houses and commercial/industrial. Impervious surfaces account for 80% to 100% of the total cover.	89	92	94	95	95	100	
Barren	31	Barren Land (Rock/Sand/Clay) - areas of bedrock, desert pavement, scarps, talus, slides, volcanic material, glacial debris, sand dunes, strip mines, gravel pits and other accumulations of earthen material. Generally, vegetation accounts for less than 15% of total cover.	77	86	91	94	94	100	
	41	Deciduous Forest - areas dominated by trees generally greater than 5 meters tall, and greater than 20% of total vegetation cover. More than 75% of the tree species shed foliage simultaneously in response to seasonal change.	43	55	70	77	77	100	
Forest	42	Evergreen Forest - areas dominated by trees generally greater than 5 meters tall, and greater than 20% of total vegetation cover. More than 75% of the tree species maintain their leaves all year. Canopy is never without green foliage.	43	55	70	77	77	100	
	43	Mixed Forest - areas dominated by trees generally greater than 5 meters tall, and greater than 20% of total vegetation cover. Neither deciduous nor evergreen species are greater than 75% of total tree cover.	43	55	70	77	77	100	
Shrubland	51	Dwarf Scrub - Alaska only areas dominated by shrubs less than 20 centimeters tall with shrub canopy typically greater than 20% of total vegetation. This type is often co-associated with grasses, sedges, herbs, and non-vascular vegetation.	55	71	81	89	89	100	
	52	Shrub/Scrub - areas dominated by shrubs; less than 5 meters tall with shrub canopy typically greater than 20% of total vegetation. This class includes true shrubs, young trees in an early successional stage or trees stunted from environmental conditions.	55	71	81	89	89	100	
Herbaceous	71	Grassland/Herbaceous - areas dominated by graminoid or herbaceous vegetation, generally greater than 80% of total vegetation. These areas are not subject to intensive management such as tilling, but can be utilized for grazing.	55	71	81	89	89	100	
	72	Sedge/Herbaceous - Alaska only areas dominated by sedges and forbs, generally greater than 80% of total vegetation. This type can occur with significant other grasses or other grass like plants, and includes sedge tundra, and sedge tussock tundra.	55	71	81	89	89	100	
Planted/Cultivated	73	Lichens - Alaska only areas dominated by fruticose or foliose lichens generally greater than 80% of total vegetation.	55	71	81	89	89	100	
	74	Moss - Alaska only areas dominated by mosses, generally greater than 80% of total vegetation.	55	71	81	89	89	100	
Wetlands	81	Pasture/Hay - areas of grasses, legumes, or grass-legume mixtures planted for livestock grazing or the production of seed or hay crops, typically on a perennial cycle. Pasture/hay vegetation accounts for greater than 20% of total vegetation.	55	71	81	89	89	100	
	82	Cultivated Crops - areas used for the production of annual crops, such as corn, soybeans, vegetables, tobacco, and cotton, and also perennial woody crops such as orchards and vineyards. Crop vegetation accounts for greater than 20% of total vegetation. This class also includes all land being actively tilled.	67	78	85	89	89	100	
Wetlands	83	Small Grains	63	75	83	87	87	100	
	91	Woody Wetlands - areas where forest or shrubland vegetation accounts for greater than 20% of vegetative cover and the soil or substrate is periodically saturated with or covered with water.	45	66	77	83	83	100	
	92	Emergent Herbaceous Wetlands - Areas where perennial herbaceous vegetation accounts for greater than 80% of vegetative cover and the soil or substrate is periodically saturated with or covered with water.	45	66	77	83	83	100	

*A/D, B/D and C/D soils lumped as D soils, W denotes water

**Curve Numbers for NLCD Codes 41-43 have been increased from 30 to 43 as many of these areas are partially grazed Woods-grass combination.

The background of the page is a topographic map with red contour lines on a dark brown background. A dashed red line runs vertically through the center. A red 'x' is located in the upper-middle section, and a red dot is in the lower-middle section.

Appendix C


FEMA Flood Insurance Rate Map (FIRM)

NOTES TO USERS

This map is not intended to show any flood hazard areas, but is intended to show the flood insurance rate map for the area shown. The map is not intended to be used as a basis for any other purpose. The map is not intended to be used as a basis for any other purpose. The map is not intended to be used as a basis for any other purpose.

GENERAL NOTES:

- 1. The map is not intended to show any flood hazard areas, but is intended to show the flood insurance rate map for the area shown.
- 2. The map is not intended to be used as a basis for any other purpose.
- 3. The map is not intended to be used as a basis for any other purpose.



FIRM

FLOOD INSURANCE RATE MAP

MORGAN COUNTY,

COLORADO

AND UNINCORPORATED AREAS

PANEL 0552 OF 0575

MAP NUMBER 08087C0552

EFFECTIVE DATE APRIL 4, 2011

LEGEND

SHADING

- Special Hazard Areas (Special Flood Hazard Areas)
- Zone A (Special Flood Hazard Area)
- Zone B (Special Flood Hazard Area)
- Zone C (Special Flood Hazard Area)
- Zone D (Special Flood Hazard Area)
- Zone E (Special Flood Hazard Area)
- Zone F (Special Flood Hazard Area)
- Zone G (Special Flood Hazard Area)
- Zone H (Special Flood Hazard Area)
- Zone I (Special Flood Hazard Area)
- Zone J (Special Flood Hazard Area)
- Zone K (Special Flood Hazard Area)
- Zone L (Special Flood Hazard Area)
- Zone M (Special Flood Hazard Area)
- Zone N (Special Flood Hazard Area)
- Zone O (Special Flood Hazard Area)
- Zone P (Special Flood Hazard Area)
- Zone Q (Special Flood Hazard Area)
- Zone R (Special Flood Hazard Area)
- Zone S (Special Flood Hazard Area)
- Zone T (Special Flood Hazard Area)
- Zone U (Special Flood Hazard Area)
- Zone V (Special Flood Hazard Area)
- Zone W (Special Flood Hazard Area)
- Zone X (Special Flood Hazard Area)
- Zone Y (Special Flood Hazard Area)
- Zone Z (Special Flood Hazard Area)

NATIONAL FLOOD INSURANCE PROGRAM

FIRM

FLOOD INSURANCE RATE MAP

MORGAN COUNTY,


COLORADO

AND UNINCORPORATED AREAS

PANEL 0552 OF 0575

MAP NUMBER 08087C0552

EFFECTIVE DATE APRIL 4, 2011

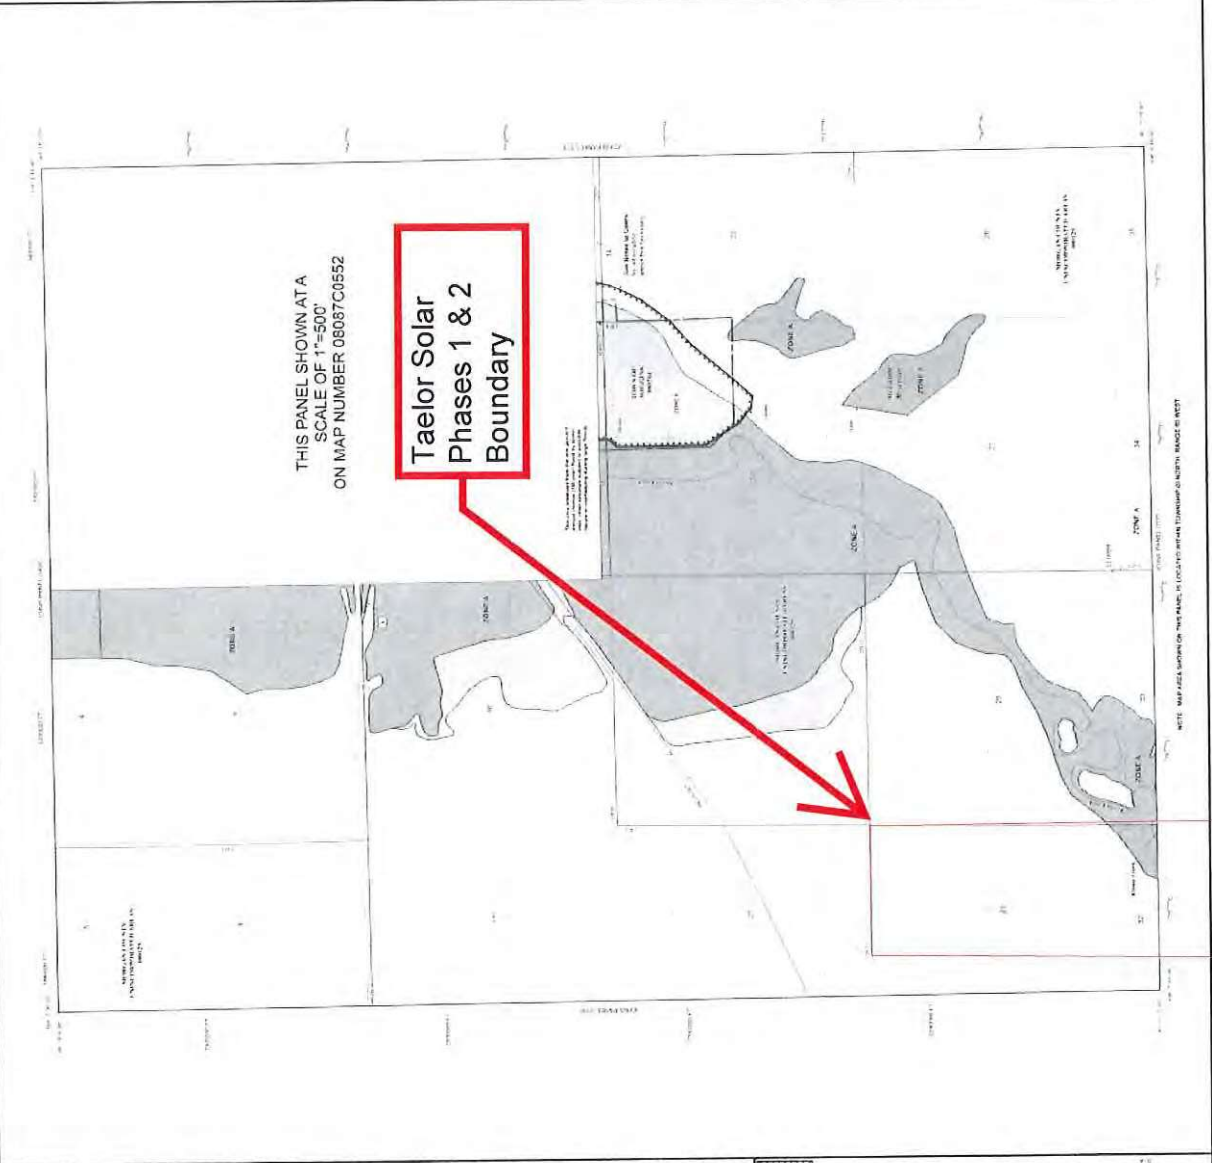

The background of the cover is a topographic map with red contour lines on a dark brown background. A dashed red line runs vertically through the center, with a small red 'x' and a red dot on it. Three white circular punch holes are visible on the left edge.

Appendix D

USGS StreamStats Reports


Jack Rabbit Creek StreamStats Report

Region ID: CO

Workspace ID: C020220126180819041000

Clicked Point (Latitude, Longitude): 40.11290, -104.23792

Time: 2022-01-26 11:08:42 -0700

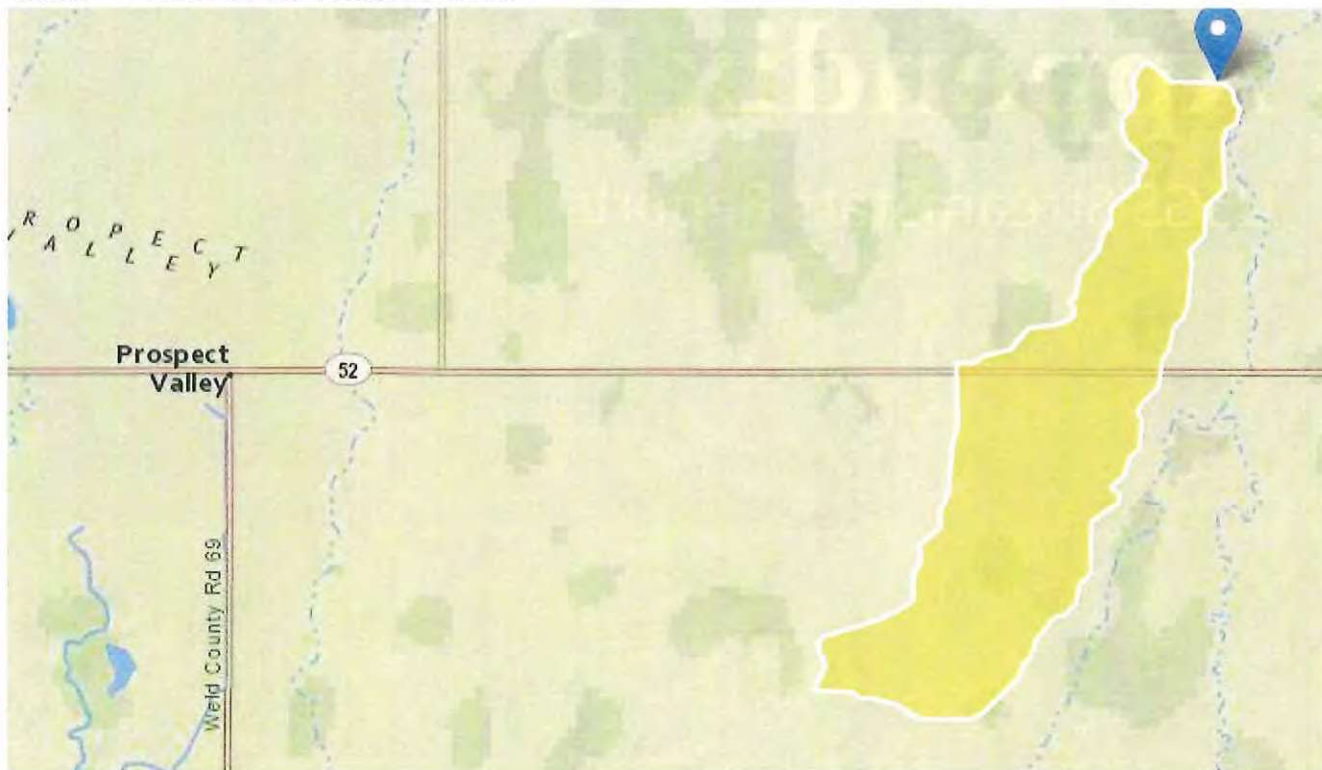

Basin Characteristics

Parameter Code	Parameter Description	Value	Unit
DRNAREA	Area that drains to a point on a stream	8.33	square miles
I6H100Y	6-hour precipitation that is expected to occur on average once in 100 years	3.89	inches
STATSCLAY	Percentage of clay soils from STATSGO	22.01	percent
OUTLETELEV	Elevation of the stream outlet in feet above NAVD88	4733	feet

Peak-Flow Statistics Parameters [Foothills Region Peak Flow 2016 5099]

Parameter Code	Parameter Name	Value	Units	Min Limit	Max Limit
DRNAREA	Drainage Area	8.33	square miles	0.6	2850
I6H100Y	6 Hour 100 Year Precipitation	3.89	inches	2.38	4.89
STATSCLAY	STATSGO Percentage of Clay Soils	22.01	percent	9.87	37.5
OUTLETELEV	Elevation of Gage	4733	feet	4290	8270

Peak-Flow Statistics Flow Report [Foothills Region Peak Flow 2016 5099]

PIl: Prediction Interval-Lower, PIu: Prediction Interval-Upper, ASEp: Average Standard Error of Prediction, SE: Standard Error (other -- see report)

Statistic	Value	Unit	ASEp
50-percent AEP flood	192	ft ³ /s	117
20-percent AEP flood	644	ft ³ /s	87
10-percent AEP flood	1180	ft ³ /s	80
4-percent AEP flood	2200	ft ³ /s	80
2-percent AEP flood	3250	ft ³ /s	83
1-percent AEP flood	4660	ft ³ /s	88
0.5-percent AEP flood	6390	ft ³ /s	94
0.2-percent AEP flood	9290	ft ³ /s	104

Peak-Flow Statistics Citations

Kohn, M.S., Stevens, M.R., Harden, T.M., Godaire, J.E., Klinger, R.E., and Mommandi, A., 2016, Paleoflood investigations to improve peak-streamflow regional-regression equations for natural streamflow in eastern Colorado, 2015: U.S. Geological Survey Scientific Investigations Report 2016-5099, 58 p. (<http://dx.doi.org/10.3133/sir20165099>)

USGS Data Disclaimer: Unless otherwise stated, all data, metadata and related materials are considered to satisfy the quality standards relative to the purpose for which the data were collected. Although these data and associated metadata have been reviewed for accuracy and completeness and approved for release by the U.S. Geological Survey (USGS), no warranty expressed or implied is made regarding the display or utility of the data for other purposes, nor on all computer systems, nor shall the act of distribution constitute any such warranty.

USGS Software Disclaimer: This software has been approved for release by the U.S. Geological Survey (USGS). Although the software has been subjected to rigorous review, the USGS reserves the right to update the software as needed pursuant to further analysis and review. No warranty, expressed or implied, is made by the USGS or the U.S. Government as to the functionality of the software and related material nor shall the fact of release constitute any such warranty. Furthermore, the software is released on condition that neither the USGS nor the U.S. Government shall be held liable for any damages resulting from its authorized or unauthorized use.

USGS Product Names Disclaimer: Any use of trade, firm, or product names is for descriptive purposes only and does not imply endorsement by the U.S. Government.

Application Version: 4.6.2

StreamStats Services Version: 1.2.22

NSS Services Version: 2.1.2

Kiowa Creek StreamStats Report

Region ID: CO

Workspace ID: CO20220126181728352000

Clicked Point (Latitude, Longitude): 40.11266, -104.23086

Time: 2022-01-26 11:17:52 -0700



Basin Characteristics

Parameter Code	Parameter Description	Value	Unit
DRNAREA	Area that drains to a point on a stream	585	square miles
I6H100Y	6-hour precipitation that is expected to occur on average once in 100 years	3.82	inches
STATSCLAY	Percentage of clay soils from STATSGO	17.97	percent
OUTLETELEV	Elevation of the stream outlet in feet above NAVD88	4734	feet

Peak-Flow Statistics Parameters [Foothills Region Peak Flow 2016 5099]

Parameter Code	Parameter Name	Value	Units	Min Limit	Max Limit
DRNAREA	Drainage Area	585	square miles	0.6	2850
I6H100Y	6 Hour 100 Year Precipitation	3.82	inches	2.38	4.89
STATSCLAY	STATSGO Percentage of Clay Soils	17.97	percent	9.87	37.5
OUTLETELEV	Elevation of Gage	4734	feet	4290	8270

Peak-Flow Statistics Flow Report [Foothills Region Peak Flow 2016 5099]

PIl: Prediction Interval-Lower, PIu: Prediction Interval-Upper, ASEp: Average Standard Error of Prediction, SE: Standard Error (other -- see report)

Statistic	Value	Unit	ASEp
50-percent AEP flood	2260	ft ³ /s	117
20-percent AEP flood	6410	ft ³ /s	87
10-percent AEP flood	11100	ft ³ /s	80
4-percent AEP flood	20000	ft ³ /s	80
2-percent AEP flood	28900	ft ³ /s	83
1-percent AEP flood	40700	ft ³ /s	88
0.5-percent AEP flood	55000	ft ³ /s	94
0.2-percent AEP flood	78100	ft ³ /s	104

Peak-Flow Statistics Citations

Kohn, M.S., Stevens, M.R., Harden, T.M., Godaire, J.E., Klinger, R.E., and Mommandi, A., 2016, Paleoflood investigations to improve peak-streamflow regional-regression equations for natural streamflow in eastern Colorado, 2015: U.S. Geological Survey Scientific Investigations Report 2016-5099, 58 p. (<http://dx.doi.org/10.3133/sir20165099>)

USGS Data Disclaimer: Unless otherwise stated, all data, metadata and related materials are considered to satisfy the quality standards relative to the purpose for which the data were collected. Although these data and associated metadata have been reviewed for accuracy and completeness and approved for release by the U.S. Geological Survey (USGS), no warranty expressed or implied is made regarding the display or utility of the data for other purposes, nor on all computer systems, nor shall the act of distribution constitute any such warranty.

USGS Software Disclaimer: This software has been approved for release by the U.S. Geological Survey (USGS). Although the software has been subjected to rigorous review, the USGS reserves the right to update the software as needed pursuant to further analysis and review. No warranty, expressed or implied, is made by the USGS or the U.S. Government as to the functionality of the software and related material nor shall the fact of release constitute any such warranty. Furthermore, the software is released on condition that neither the USGS nor the U.S. Government shall be held liable for any damages resulting from its authorized or unauthorized use.

USGS Product Names Disclaimer: Any use of trade, firm, or product names is for descriptive purposes only and does not imply endorsement by the U.S. Government.

Application Version: 4.6.2

StreamStats Services Version: 1.2.22

NSS Services Version: 2.1.2


Rock Creek StreamStats Report

Region ID: CO

Workspace ID: CO20220126184549617000

Clicked Point (Latitude, Longitude): 40.11540, -104.13307

Time: 2022-01-26 11:46:10 -0700

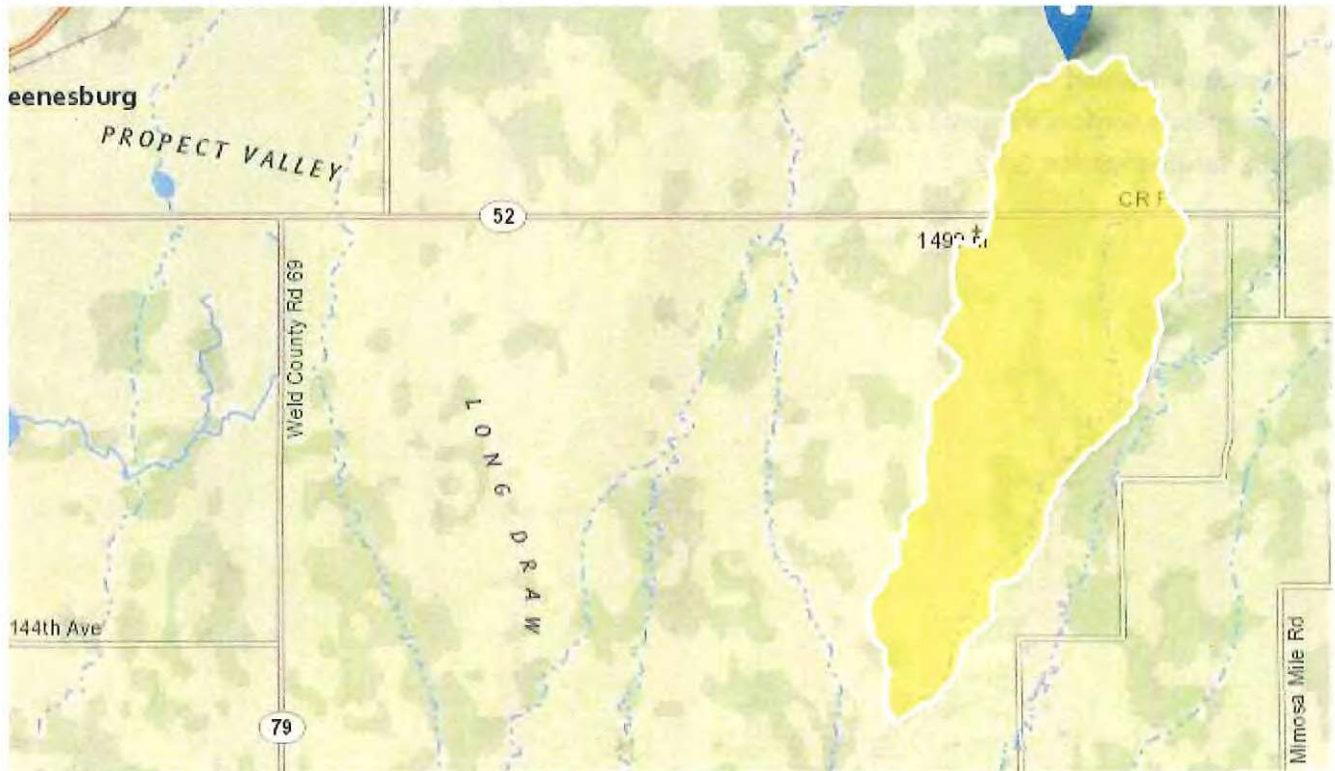

Basin Characteristics

Parameter Code	Parameter Description	Value	Unit
DRNAREA	Area that drains to a point on a stream	35.9	square miles
16H100Y	6-hour precipitation that is expected to occur on average once in 100 years	3.9	inches
STATSCLAY	Percentage of clay soils from STATSGO	24.18	percent
OUTLETELEV	Elevation of the stream outlet in feet above NAVD88	4667	feet

Peak-Flow Statistics Parameters [Foothills Region Peak Flow 2016 5099]

Parameter Code	Parameter Name	Value	Units	Min Limit	Max Limit
DRNAREA	Drainage Area	35.9	square miles	0.6	2850
I6H100Y	6 Hour 100 Year Precipitation	3.9	inches	2.38	4.89
STATSCLAY	STATSGO Percentage of Clay Soils	24.18	percent	9.87	37.5
OUTLETELEV	Elevation of Gage	4667	feet	4290	8270

Peak-Flow Statistics Flow Report [Foothills Region Peak Flow 2016 5099]

PIl: Prediction Interval-Lower, PIu: Prediction Interval-Upper, ASEp: Average Standard Error of Prediction, SE: Standard Error (other -- see report)

Statistic	Value	Unit	ASEp
50-percent AEP flood	540	ft ³ /s	117
20-percent AEP flood	1760	ft ³ /s	87
10-percent AEP flood	3210	ft ³ /s	80
4-percent AEP flood	5960	ft ³ /s	80
2-percent AEP flood	8780	ft ³ /s	83
1-percent AEP flood	12500	ft ³ /s	88
0.5-percent AEP flood	17200	ft ³ /s	94
0.2-percent AEP flood	24900	ft ³ /s	104

Peak-Flow Statistics Citations

Kohn, M.S., Stevens, M.R., Harden, T.M., Godaire, J.E., Klinger, R.E., and Mommandi, A., 2016, Paleoflood investigations to improve peak-streamflow regional-regression equations for natural streamflow in eastern Colorado, 2015: U.S. Geological Survey Scientific Investigations Report 2016-5099, 58 p. (<http://dx.doi.org/10.3133/sir20165099>)

USGS Data Disclaimer: Unless otherwise stated, all data, metadata and related materials are considered to satisfy the quality standards relative to the purpose for which the data were collected. Although these data and associated metadata have been reviewed for accuracy and completeness and approved for release by the U.S. Geological Survey (USGS), no warranty expressed or implied is made regarding the display or utility of the data for other purposes, nor on all computer systems, nor shall the act of distribution constitute any such warranty.

USGS Software Disclaimer: This software has been approved for release by the U.S. Geological Survey (USGS). Although the software has been subjected to rigorous review, the USGS reserves the right to update the software as needed pursuant to further analysis and review. No warranty, expressed or implied, is made by the USGS or the U.S. Government as to the functionality of the software and related material nor shall the fact of release constitute any such warranty. Furthermore, the software is released on condition that neither the USGS nor the U.S. Government shall be held liable for any damages resulting from its authorized or unauthorized use.

USGS Product Names Disclaimer: Any use of trade, firm, or product names is for descriptive purposes only and does not imply endorsement by the U.S. Government.

Application Version: 4.6.2

StreamStats Services Version: 1.2.22

NSS Services Version: 2.1.2


Eastern Tributary StreamStats Report

Region ID: CO

Workspace ID: CO20220126185734682000

Clicked Point (Latitude, Longitude): 40.13799, -104.09089

Time: 2022-01-26 11:58:02 -0700

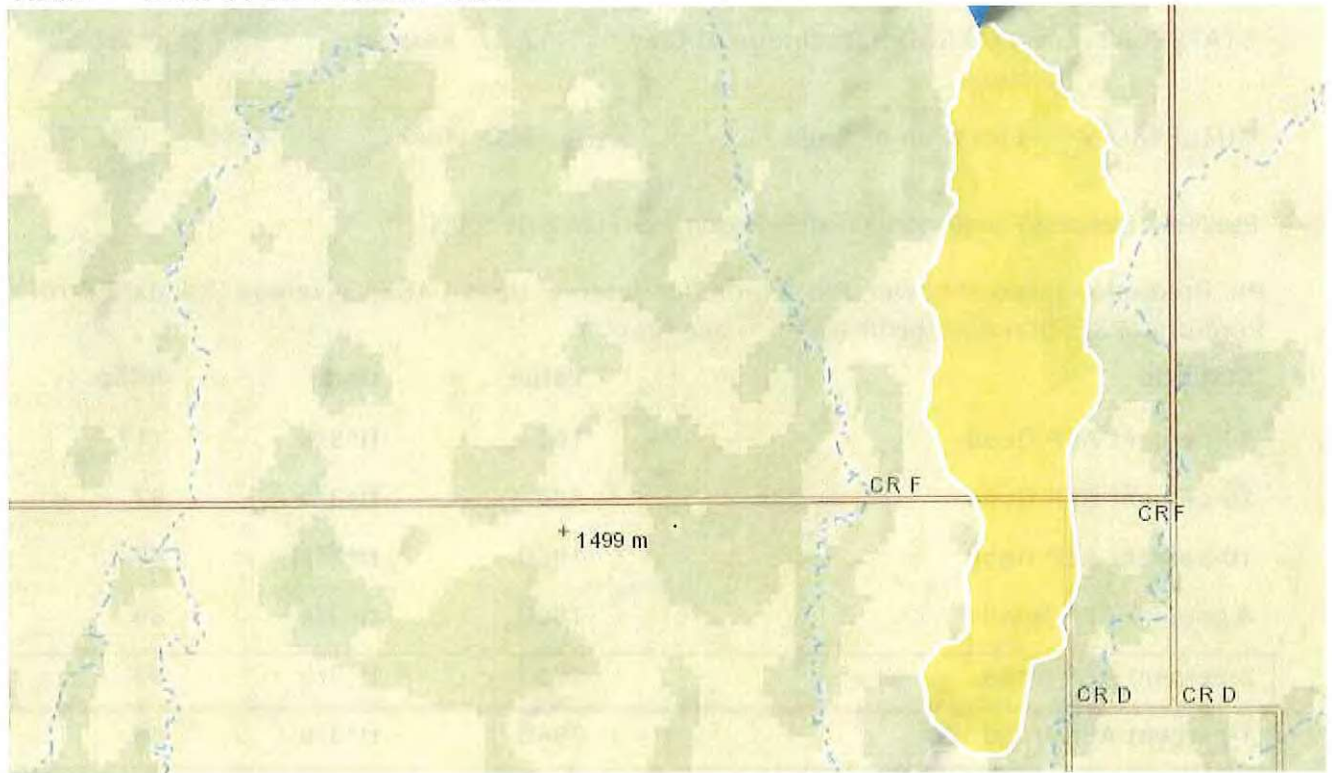

Basin Characteristics

Parameter Code	Parameter Description	Value	Unit
DRNAREA	Area that drains to a point on a stream	8.2	square miles
I6H100Y	6-hour precipitation that is expected to occur on average once in 100 years	3.9	inches
STATSCLAY	Percentage of clay soils from STATSGO	17.27	percent
OUTLETELEV	Elevation of the stream outlet in feet above NAVD88	4630	feet

Peak-Flow Statistics Parameters [Foothills Region Peak Flow 2016 5099]

Parameter Code	Parameter Name	Value	Units	Min Limit	Max Limit
DRNAREA	Drainage Area	8.2	square miles	0.6	2850
I6H100Y	6 Hour 100 Year Precipitation	3.9	inches	2.38	4.89
STATSCLAY	STATSGO Percentage of Clay Soils	17.27	percent	9.87	37.5
OUTLETELEV	Elevation of Gage	4630	feet	4290	8270

Peak-Flow Statistics Flow Report [Foothills Region Peak Flow 2016 5099]

PlI: Prediction Interval-Lower, Plu: Prediction Interval-Upper, ASEp: Average Standard Error of Prediction, SE: Standard Error (other -- see report)

Statistic	Value	Unit	ASEp
50-percent AEP flood	165	ft ³ /s	117
20-percent AEP flood	548	ft ³ /s	87
10-percent AEP flood	1000	ft ³ /s	80
4-percent AEP flood	1860	ft ³ /s	80
2-percent AEP flood	2750	ft ³ /s	83
1-percent AEP flood	3940	ft ³ /s	88
0.5-percent AEP flood	5400	ft ³ /s	94
0.2-percent AEP flood	7850	ft ³ /s	104

Peak-Flow Statistics Citations

Kohn, M.S., Stevens, M.R., Harden, T.M., Godaire, J.E., Klinger, R.E., and Mommandi, A., 2016, Paleoflood investigations to improve peak-streamflow regional-regression equations for natural streamflow in eastern Colorado, 2015: U.S. Geological Survey Scientific Investigations Report 2016–5099, 58 p. (<http://dx.doi.org/10.3133/sir20165099>)

USGS Data Disclaimer: Unless otherwise stated, all data, metadata and related materials are considered to satisfy the quality standards relative to the purpose for which the data were collected. Although these data and associated metadata have been reviewed for accuracy and completeness and approved for release by the U.S. Geological Survey (USGS), no warranty expressed or implied is made regarding the display or utility of the data for other purposes, nor on all computer systems, nor shall the act of distribution constitute any such warranty.

USGS Software Disclaimer: This software has been approved for release by the U.S. Geological Survey (USGS). Although the software has been subjected to rigorous review, the USGS reserves the right to update the software as needed pursuant to further analysis and review. No warranty, expressed or implied, is made by the USGS or the U.S. Government as to the functionality of the software and related material nor shall the fact of release constitute any such warranty. Furthermore, the software is released on condition that neither the USGS nor the U.S. Government shall be held liable for any damages resulting from its authorized or unauthorized use.

USGS Product Names Disclaimer: Any use of trade, firm, or product names is for descriptive purposes only and does not imply endorsement by the U.S. Government.

Application Version: 4.6.2

StreamStats Services Version: 1.2.22

NSS Services Version: 2.1.2