








## MS Colorfast45® and ColorFit40™ Paint System

				
Bright White (39) ☆	White (30) ☆	Ivory (28) ☆	Light Stone (63) ☆	Mocha Tan (22) ☆
				
Carlsbad Canyon (10) ☆	Taupe (74) ☆	Brown (12) ☆	Burnished Slate (49) ☆	Black (06) ☆
				
Ash Grey (25) ☆	Zinc Grey (29) ☆	Charcoal (17) ☆	Ocean Blue (35) ☆	Hawaiian Blue (70) ☆
				
Red (24) ☆	Patriot Red (73) ☆	Burgundy (15) ☆	Forest Green (26) ☆	Fern Green (07) Low Gloss ☆
				
Shale Green (R7) ☆	Native Copper (190) ☆	Galvanized (00) Non-Painted Finish - No Warranty ☆		

## MS Crinkle Finish Paint System

				
Red (24) ☆	Forest Green (26) ☆	Brown (12) ☆	Charcoal (17) ☆	Burgundy (15) ☆
				
Burnished Slate (49) ☆	Black (06) ☆			

Due to the unique texture these colors will not perfectly match and are not interchangeable with other similar Metal Sales colors. This is a unique appearance coating that needs to be seen and felt. Actual samples are available by request.



☆ All Colors Meet or Exceed Steep Slope ENERGY STAR® Requirements  
 ☆ Premium Color

[metalsales.us.com](http://metalsales.us.com)

Color selections are close representations but are limited by processing and viewing conditions. Actual samples are available upon request. For all specific warranty, application, installation, and technical information regarding these products contact your local sales representative.


**metal sales**  
manufacturing corporation



1435 Egret Avenue  
 Detroit Lakes, MN 56501  
 888.594.1394 Toll Free  
 218.847.2988 Phone  
 218.847.4835 Fax

**29**  
GAUGE

## CLASSIC RIB® PANEL

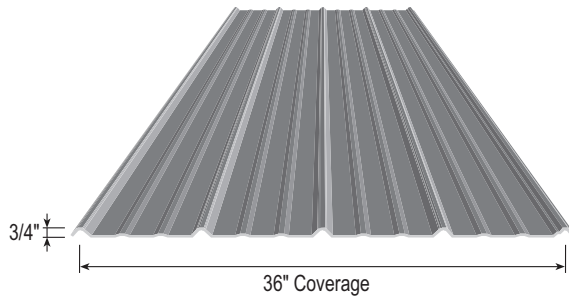

## GENERAL INFORMATION

**Minimum Slope:** 3:12

**Substructure:**

Installs over Open Framing or Solid substrate.

**Information:**

Mechanically seamed side-lap. Concealed clip designed for thermal movement.

**Testing & Approvals:**

UL 263 Fire Resistance Rating

UL 580, Class 90 Wind Uplift

UL 790, Class A Fire Resistance Rating

UL 2218, Class 4 Impact Resistance

ASTM E 455 Diaphragm Test

ASTM E 564-95 Diaphragm Test


Texas Department of Insurance Evaluation Report

ICC Evaluation Report

Miami-Dade County Approved

2014 FBC Approved

## PRO-PANEL II® PANEL

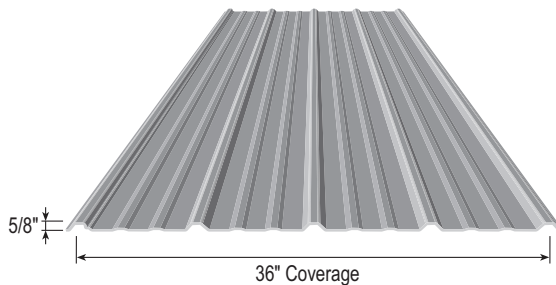

## GENERAL INFORMATION

**Minimum Slope:** 3:12

**Substructure:**

Installs over Open Framing or Solid Substrate.

**Information:**

Exposed direct-fastened roof and wall panel.

**Testing & Approvals:**

UL 263 Fire Resistance Rating


UL 790, Class A Fire Resistance Rating

UL 2218, Class 4 Impact Resistance

ASTM E 455 Diaphragm Test

2014 FBC Approved

## 1.25" CORRUGATED PANEL

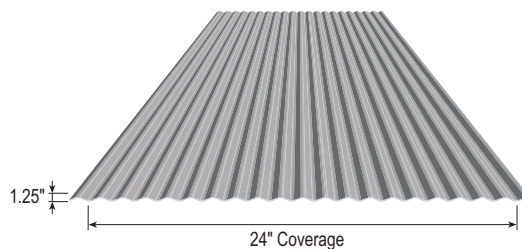

## GENERAL INFORMATION

**Minimum Slope:** 3:12

**Substructure:**

Installs over Open Framing or Solid Substrate.

**Information:**

Exposed direct-fastened roof and wall panel.

**Testing & Approvals:**

UL 263 Fire Resistance Rating


UL 580, Class 90 Wind Uplift

UL 790, Class A Fire Resistance Rating

UL 2218, Class 4 Impact Resistance

## DL-3 PANEL

FOR ARCHED AND CURVED ROOF APPLICATIONS

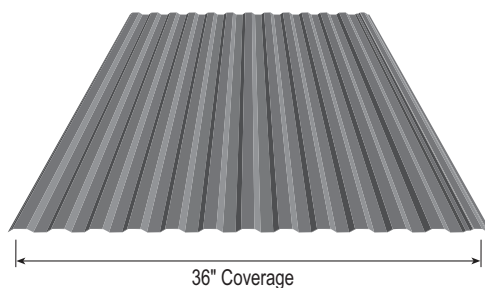

## GENERAL INFORMATION

**Minimum Radius:** 26'-0"

**Substructure:**

Installs over Open Framing or Solid Substrate.

**Panel Lengths:**

3'-0" minimum up to 45'-0" maximum

**Information:**

Exposed direct-fastened radius roof panel.

**Available in:**

Bright White    Taupe

White    Red

Light Stone    Burnished Slate

Ash Grey    Ocean Blue

Brown    Charcoal

Forest Green    Galvanized