



HEADSTOCK MOUNTED DUAL ACTION TRUSS ROD STYLE B

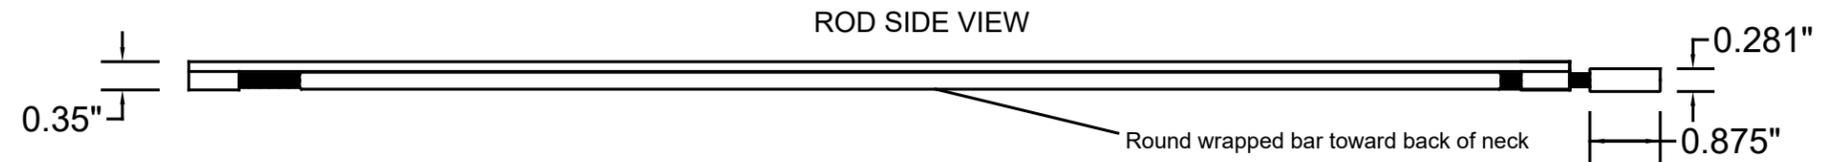

X=Rod Pocket
minimum cut length
(including nut)

8 $\frac{3}{8}$ "	8.625"
10 $\frac{1}{4}$ "	10.250"
12 $\frac{1}{4}$ "	12.250"
14 $\frac{1}{4}$ "	14.250"
15 $\frac{1}{4}$ "	15.250"
16 $\frac{3}{4}$ "	16.750"
18 $\frac{1}{8}$ "	18.125"
19	19.000"
20 $\frac{1}{8}$ "	20.125"
23 $\frac{5}{8}$ "	23.625"

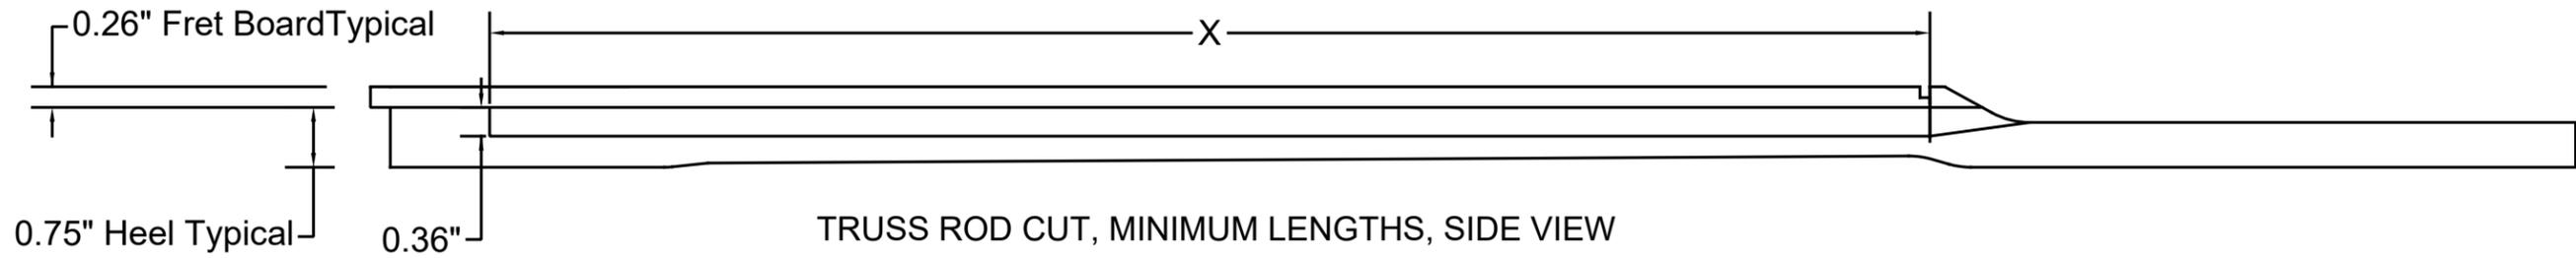