



COMPONANCE

ARCHITECTURAL HARDWARE

DA SERIES

WALL MOUNTED HANDRAIL BRACKET



SPEC

DA-WALL-(COLOUR)


NOTES

Application	Wall Mounted
Material	304 Stainless Steel / Solid Brass
Finish	Brushed or Powder Coated
Colours	Black, White, Stainless, Brass
Use	Interior & Exterior
Projection	2.6" / 67mm
Spacing	36"-48" o.c. / 914-1220mm
Hardware	Included

Use with rail with flat bottom. Minimum 1-1/2" solid backing required. Can be installed on existing drywall. All hardware included.

DA Series, designed and manufactured by componance. For technical information, CAD drawings or related materials, please visit: www.componance.com or contact an authorized componance dealer. All information subject to change. Line drawings are not plotted to scale, for scaled drawings please inquire or download the drawings in CAD format.

componance.com
info@componance.com
 +1.604.771.5128

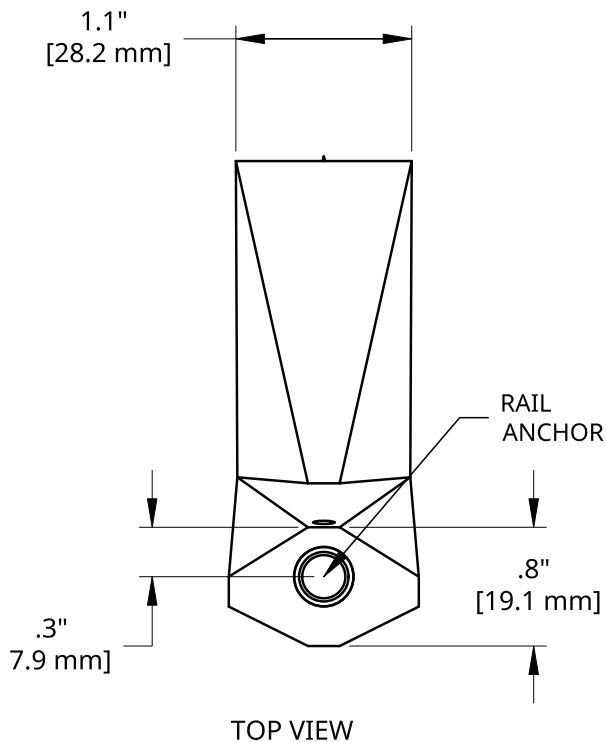

NOTES

Specification: DA-WALL-(COLOUR)



Minimum 1-1/2" / 38mm of solid backing, wood stud or concrete required for anchoring.

Can be installed on top of existing drywall.

Rail must be flat on the bottom where it comes in contact with the bracket. 1.2" W x 3/4" D / 31mm x 20mm min.

Can be used with solid metal and wood rails. For hollow metal rails, please inquire.

For technical installation, product specs, maintenance and more specific questions, please contact info@componance or call +1.604.771.5128

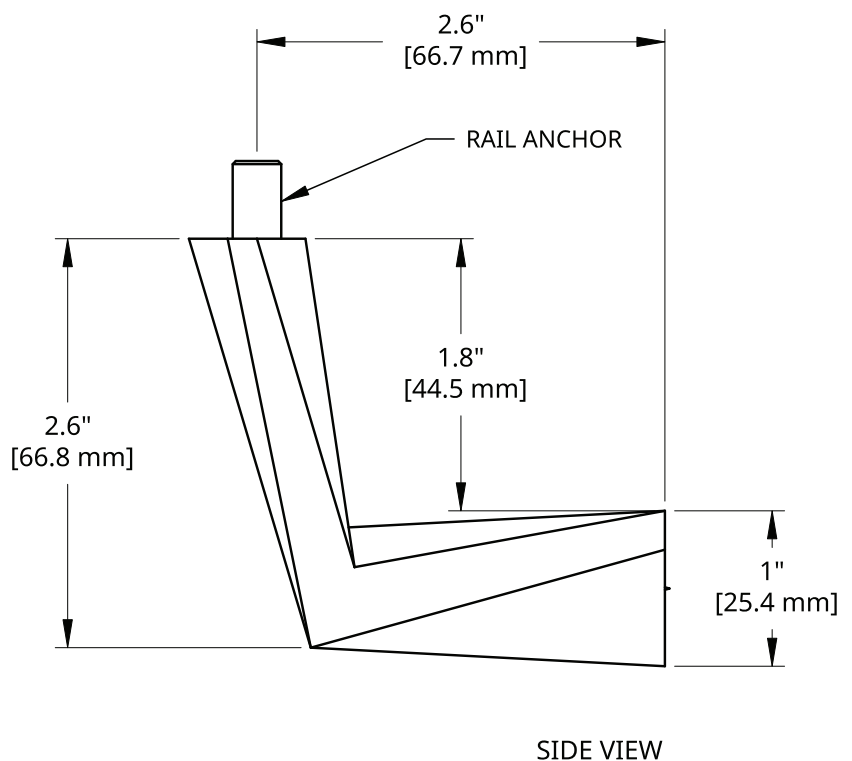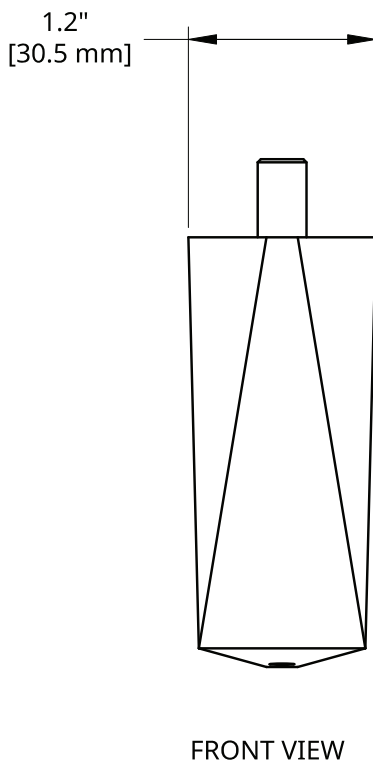

DA SERIES

WALL MOUNTED HANDRAIL BRACKET



SPEC

DA-WALL-ESC-(COLOUR)


Application	Wall Mounted
Material	304 Stainless Steel / Solid Brass
Finish	Brushed or Powder Coated
Colours	Black, White, Stainless, Brass
Use	Interior & Exterior
Projection	3" / 76mm
Spacing	36"-48" o.c. / 914-1220mm
Hardware	Included

NOTES


Use with rail with flat bottom. Minimum 1-1/2" solid backing required. Can be installed on existing drywall. All hardware included.

DA Series, designed and manufactured by componance. For technical information, CAD drawings or related materials, please visit: www.componance.com or contact an authorized componance dealer. All information subject to change. Line drawings are not plotted to scale, for scaled drawings please inquire or download the drawings in CAD format.


componance.com
info@componance.com
+1.604.771.5128

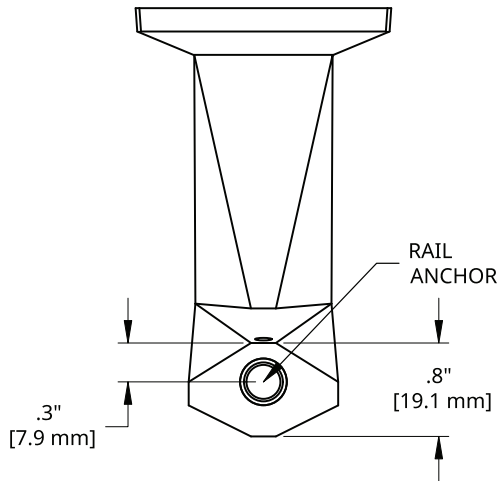

TOP VIEW

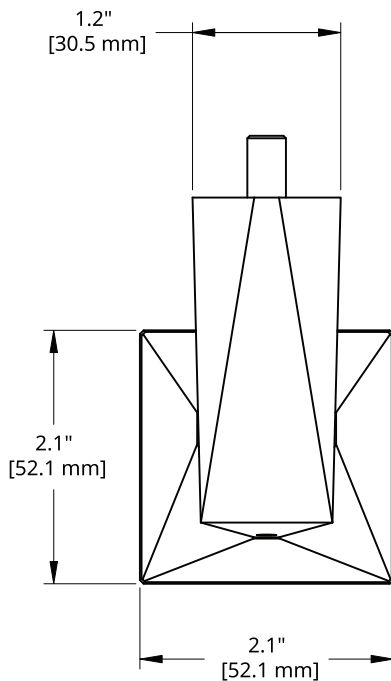

FRONT VIEW

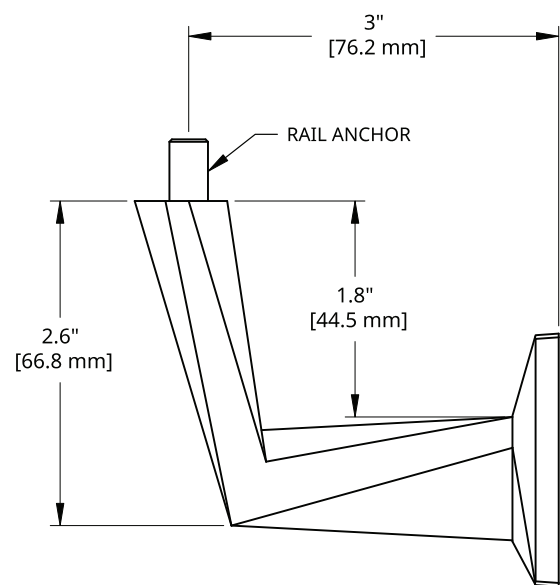

SIDE VIEW

NOTES

Specification: DA-WALL-ESC-(COLOUR)

Minimum 1-1/2" / 38mm of solid backing, wood stud or concrete required for anchoring.

Can be installed on top of existing drywall.

Rail must be flat on the bottom where it comes in contact with the bracket. 1.2" W x 3/4" D / 31mm x 20mm min.

Can be used with solid metal and wood rails. For hollow metal rails, please inquire.

For technical installation, product specs, maintenance and more specific questions, please contact info@componance or call +1.604.771.5128

DA SERIES

GLASS MOUNTED HANDRAIL BRACKET



SPEC

Application	Glass Mounted
Material	304 Stainless Steel
Finish	Brushed or Powder Coated
Colours	Black, White, Stainless, Brass
Use	Interior & Exterior
Projection	3" / 76mm
Spacing	36"-48" o.c. / 914-1220mm
Hardware	Included


DA-GLASS-(COLOUR)

NOTES


Use with rail with flat bottom. 3/4" / 19mm Diameter holes in glass required.. All hardware included.

DA Series, designed and manufactured by componance. For technical information, CAD drawings or related materials, please visit: www.componance.com or contact an authorized componance dealer. All information subject to change. Line drawings are not plotted to scale, for scaled drawings please inquire or download the drawings in CAD format.


componance.com
info@componance.com
 +1.604.771.5128

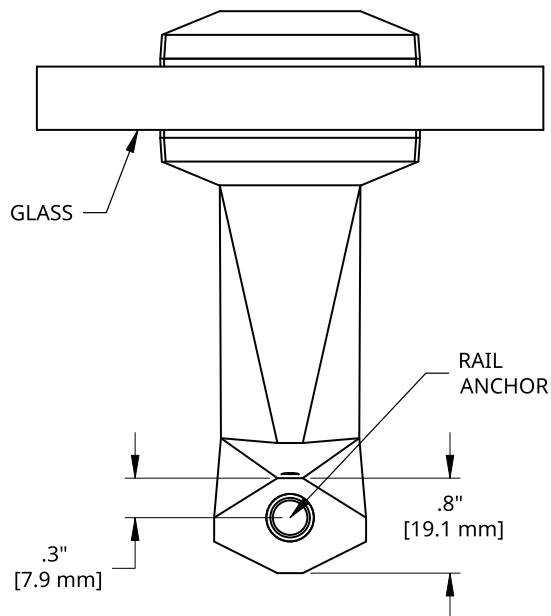

TOP VIEW

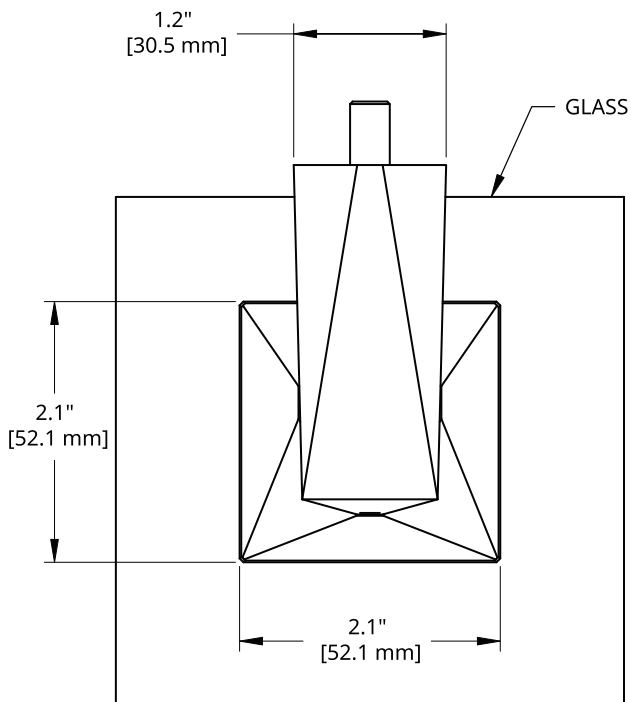

FRONT VIEW

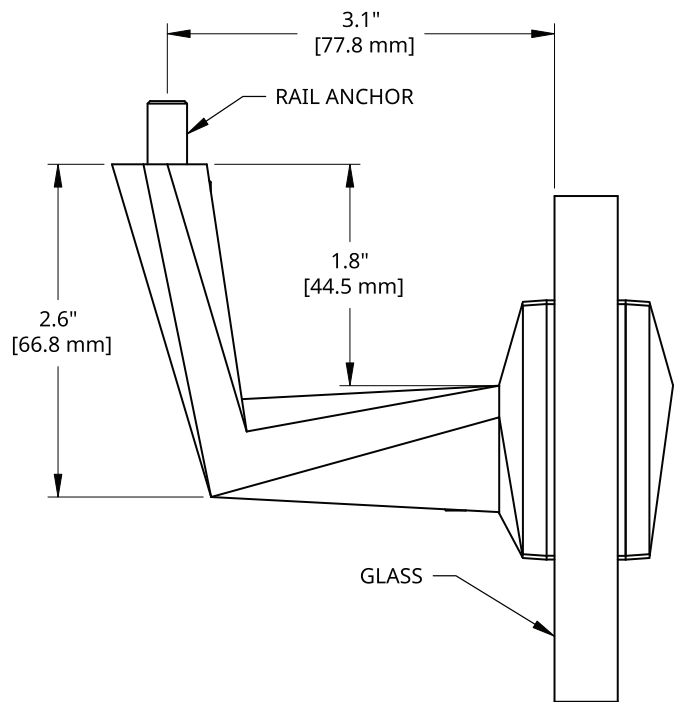

SIDE VIEW

NOTES

Specification: DA-GLASS-(COLOUR)

3/4" / 19mm Diameter hole in glass required.

Glass thickness should be specified when ordering

Rail must be flat on the bottom where it comes in contact with the bracket. 1.2" W x .80" D / 31mm x 19mm min.

Can be used with solid metal and wood rails.
For hollow metal rails, please inquire.

For technical installation, product specs, maintenance and more specific questions, please contact info@componance.com or call +1.604.771.5128

FB SERIES

WALL MOUNTED HANDRAIL BRACKET



SPEC

FB-WALL-(COLOUR)

NOTES

Application	Wall Mounted
Material	304 Stainless Steel / Solid Brass
Finish	Brushed or Powder Coated
Colours	Black, White, Stainless, Brass
Use	Interior & Exterior
Projection	3" / 76mm
Spacing	36"-48" o.c. / 914-1220mm
Hardware	Included

Use with rail with flat bottom. Minimum 1-1/2" solid backing required. Can be installed on existing drywall. All hardware included.

FB Series, designed and manufactured by componance. For technical information, CAD drawings or related materials, please visit: www.componance.com or contact an authorized componance dealer. All information subject to change. Line drawings are not plotted to scale, for scaled drawings please inquire or download the drawings in CAD format.

componance.com
info@componance.com
 +1.604.771.5128

NOTES

Specification: FB-WALL-(COLOUR)




Minimum 1-1/2" / 38mm of solid backing, wood stud or concrete required for anchoring.

Can be installed on top of existing drywall.

Rail must be flat on the bottom where it comes in contact with the bracket. 2" W x 3/4" D / 50mm x 20mm min.

Can be used with solid metal and wood rails. For hollow metal rails, please inquire.

For technical installation, product specs, maintenance and more specific questions, please contact info@componance or call +1.604.771.5128

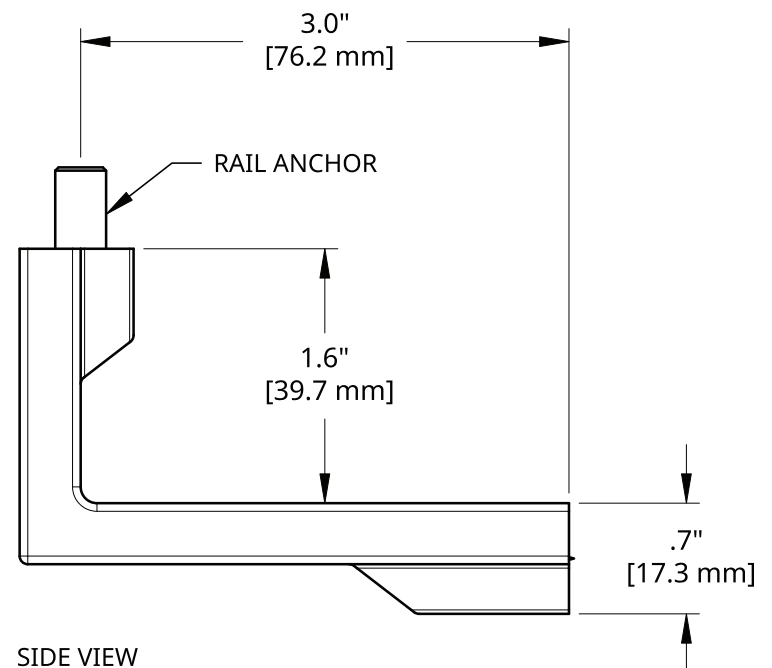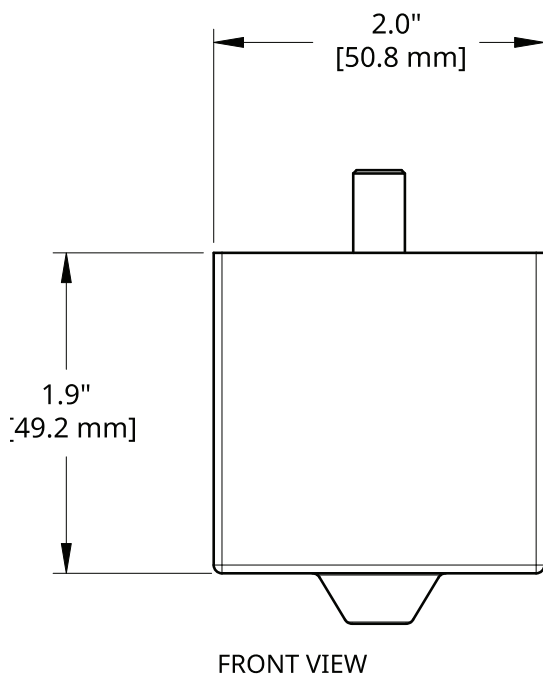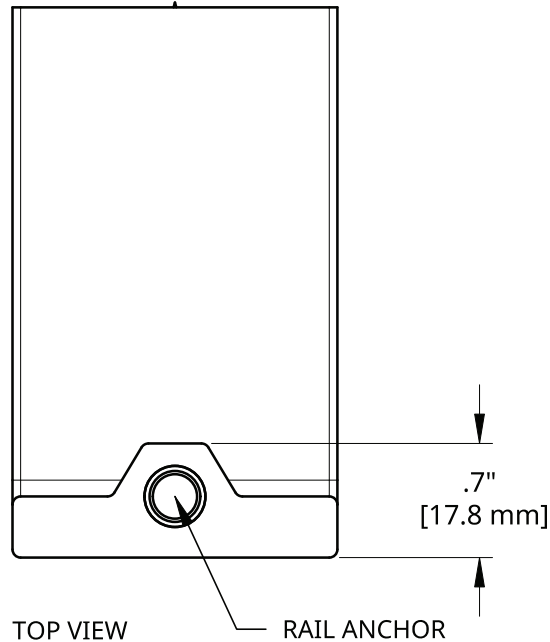

SA SERIES

WALL MOUNTED HANDRAIL BRACKET



SPEC

Application	Wall Mounted
Material	304 Stainless Steel / Solid Brass
Finish	Brushed or Powder Coated
Colours	Black, White, Stainless, Brass
Use	Interior & Exterior
Projection	2.9" / 74mm
Spacing	36"-48" o.c. / 914-1220mm
Hardware	Included

SA-WALL-(COLOUR)

NOTES

Use with rail with flat bottom. Minimum 1-1/2" solid backing required. Can be installed on existing drywall. All hardware included.

SA Series, designed and manufactured by componance. For technical information, CAD drawings or related materials, please visit: www.componance.com or contact an authorized componance dealer. All information subject to change. Line drawings are not plotted to scale, for scaled drawings please inquire or download the drawings in CAD format.

componance.com
info@componance.com
 +1.604.771.5128

NOTES

Specification: SA-WALL-W(COLOUR)


Minimum 1-1/2" / 38mm of solid backing, wood stud or concrete required for anchoring.

Can be installed on top of existing drywall.


Rail must be flat on the bottom where it comes in contact with the bracket. 1.75" W x 3/4" D / 45mm x 20mm min.

Can be used with solid metal and wood rails. For hollow metal rails, please inquire.


For technical installation, product specs, maintenance and more specific questions, please contact info@componance or call +1.604.771.5128

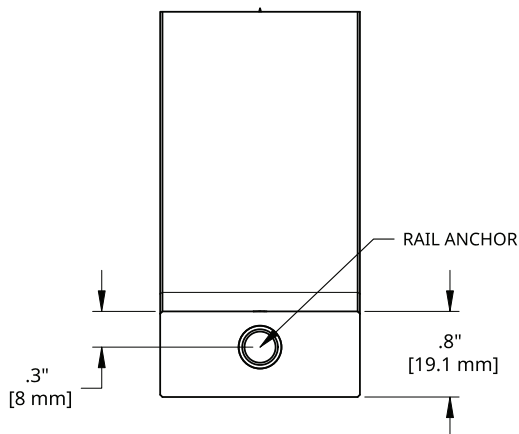

TOP VIEW

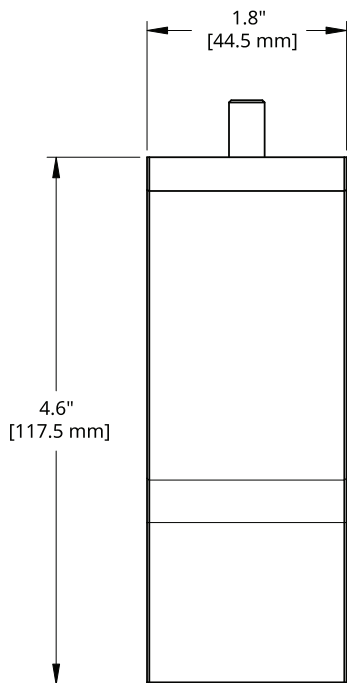

FRONT VIEW

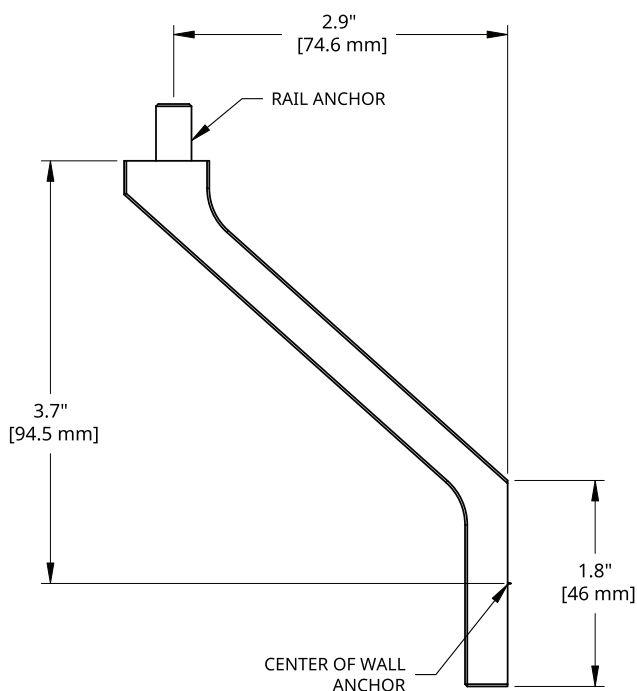

SIDE VIEW

SA Series, designed and manufactured by componance. For technical information, CAD drawings or related materials, please visit: www.componance.com or contact an authorized componance dealer. All information subject to change. Line drawings are not plotted to scale, for scaled drawings please inquire or download the drawings in CAD format.

componance.com
info@componance.com
 +1.604.771.5128

SA SERIES

GLASS MOUNTED HANDRAIL BRACKET



SPEC

Application
Material
Finish
Colours
Use
Projection
Spacing
Hardware

SA-GLASS-(COLOUR)

Glass Mounted
304 Stainless Steel
Brushed or Powder Coated
Black, White, Stainless, Brass
Interior & Exterior
3" / 76mm
36"-48" o.c. / 914-1220mm
Included

NOTES

Use with rail with flat bottom. 3/4" / 19mm
Diameter holes in glass required.. All hardware included.

SA Series, designed and manufactured by componance. For technical information, CAD drawings or related materials, please visit: www.componance.com or contact an authorized componance dealer. All information subject to change. Line drawings are not plotted to scale, for scaled drawings please inquire or download the drawings in CAD format.

componance.com
info@componance.com
+1.604.771.5128

NOTES

Specification: SA-GLASS-(COLOUR)




3/4" / 19mm Diameter hole in glass required.

Glass thickness should be specified when ordering

Rail must be flat on the bottom where it comes in contact with the bracket. 1.8" W x .80" D / 45mm x 19mm min.

Can be used with solid metal and wood rails.
For hollow metal rails, please inquire.

For technical installation, product specs, maintenance and more specific questions, please contact info@componance or call +1.604.771.5128

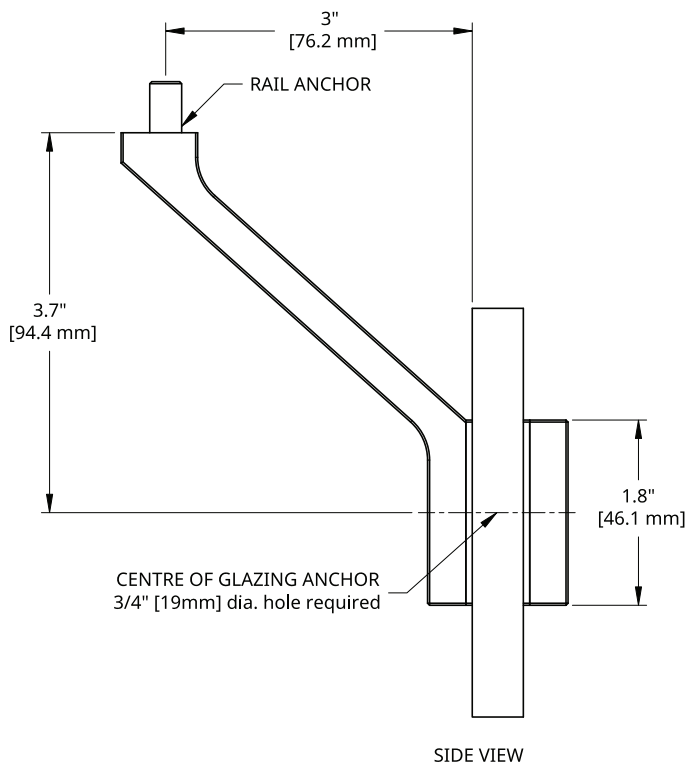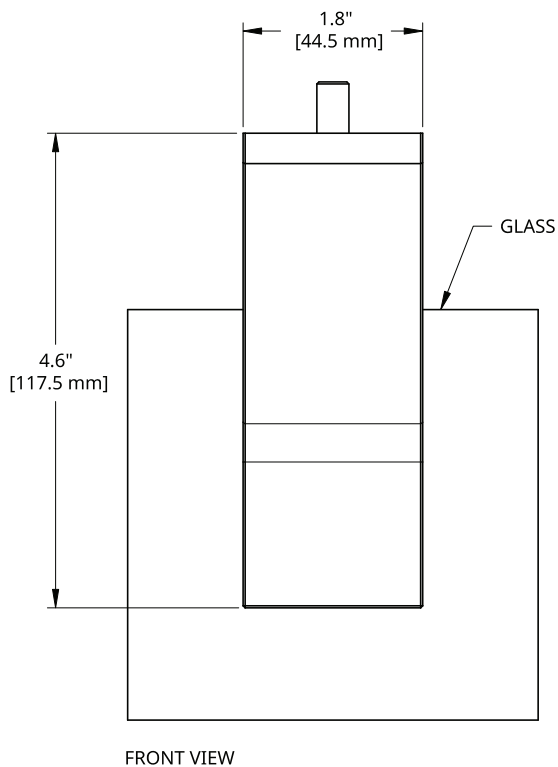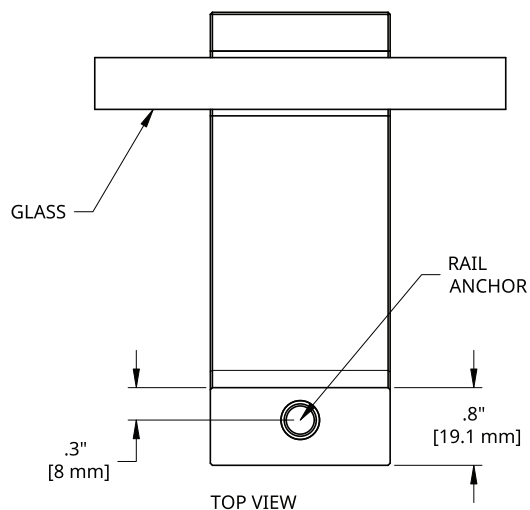

SA Series, designed and manufactured by componance. For technical information, CAD drawings or related materials, please visit: www.componance.com or contact an authorized componance dealer. All information subject to change. Line drawings are not plotted to scale, for scaled drawings please inquire or download the drawings in CAD format.

componance.com
info@componance.com
+1.604.771.5128

VR SERIES

WALL MOUNTED HANDRAIL BRACKET



SPEC

Application
Material
Finish
Colours
Use
Projection
Spacing
Hardware

VR-WALL-(COLOUR)

Wall Mounted
304 Stainless Steel
Brushed or Powder Coated
Black, White, Stainless
Interior & Exterior
3" / 76mm
36"-48" o.c. / 914-1220mm
Included

NOTES

Use with rail with flat bottom. Minimum 1-1/2" solid backing required. Can be installed on existing drywall. All hardware included.

VR Series, designed and manufactured by componance. For technical information, CAD drawings or related materials, please visit: www.componance.com or contact an authorized componance dealer. All information subject to change. Line drawings are not plotted to scale, for scaled drawings please inquire or download the drawings in CAD format.

componance.com
info@componance.com
+1.604.771.5128

NOTES

Specification: VR-WALL-(COLOUR)


Minimum 1-1/2" / 38mm of solid backing, wood stud or concrete required for anchoring.

Can be installed on top of existing drywall.


Rail must be flat on the bottom where it comes in contact with the bracket. 1.5" W x 1" D / 39mm x 26mm min.

Can be used with solid metal and wood rails.
For hollow metal rails, please inquire.


For technical installation, product specs, maintenance and more specific questions, please contact info@componance or call +1.604.771.5128

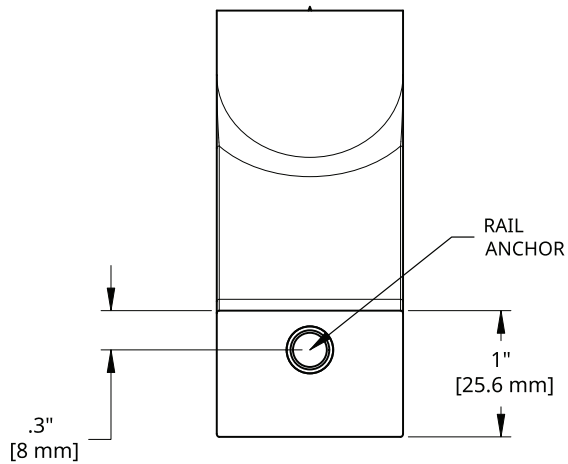

TOP VIEW

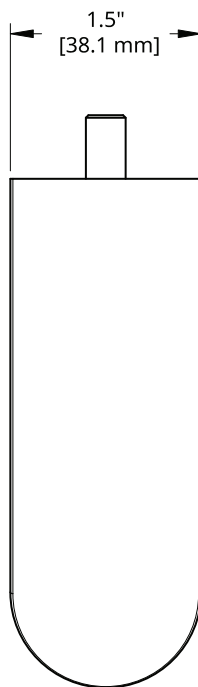

FRONT VIEW

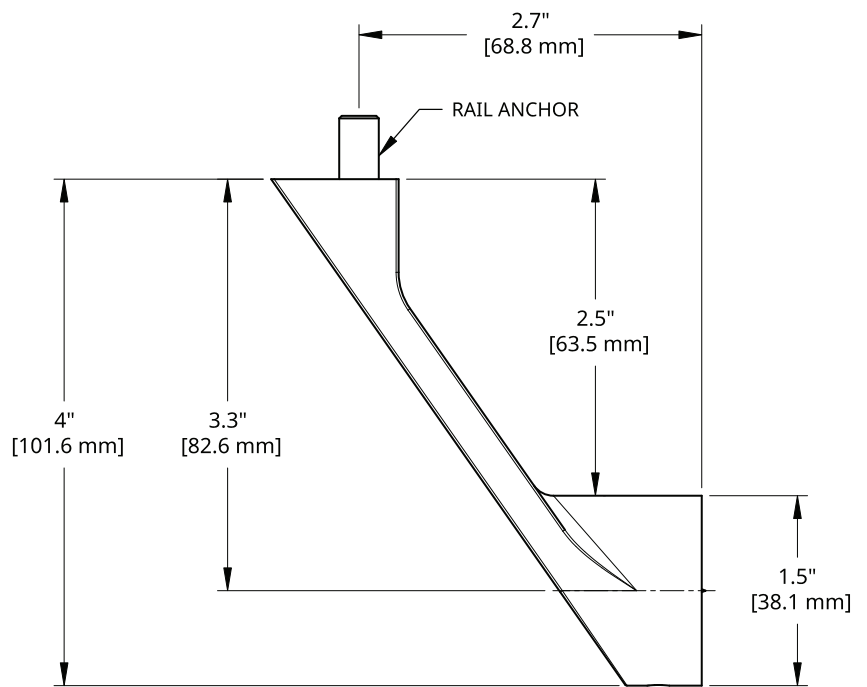

SIDE VIEW

VR Series, designed and manufactured by componance. For technical information, CAD drawings or related materials, please visit: www.componance.com or contact an authorized componance dealer. All information subject to change. Line drawings are not plotted to scale, for scaled drawings please inquire or download the drawings in CAD format.

componance.com
info@componance.com
+1.604.771.5128

VS SERIES

WALL MOUNTED HANDRAIL BRACKET



SPEC

Application	Wall Mounted
Material	304 Stainless Steel
Finish	Brushed or Powder Coated
Colours	Black, White, Stainless
Use	Interior & Exterior
Projection	3" / 76mm
Spacing	36"-48" o.c. / 914-1220mm
Hardware	Included

VS-WALL-(COLOUR)

NOTES

Use with rail with flat bottom. Minimum 1-1/2" solid backing required. Can be installed on existing drywall. All hardware included.

VS Series, designed and manufactured by componance. For technical information, CAD drawings or related materials, please visit: www.componance.com or contact an authorized componance dealer. All information subject to change. Line drawings are not plotted to scale, for scaled drawings please inquire or download the drawings in CAD format.

componance.com
info@componance.com
+1.604.771.5128

NOTES

Specification: VS-WALL-(COLOUR)


Minimum 1-1/2" / 38mm of solid backing, wood stud or concrete required for anchoring.

Can be installed on top of existing drywall.


Rail must be flat on the bottom where it comes in contact with the bracket. 1.8" W x 1" D / 45mm x 26mm min.

Can be used with solid metal and wood rails.
For hollow metal rails, please inquire.


For technical installation, product specs, maintenance and more specific questions, please contact info@componance or call +1.604.771.5128

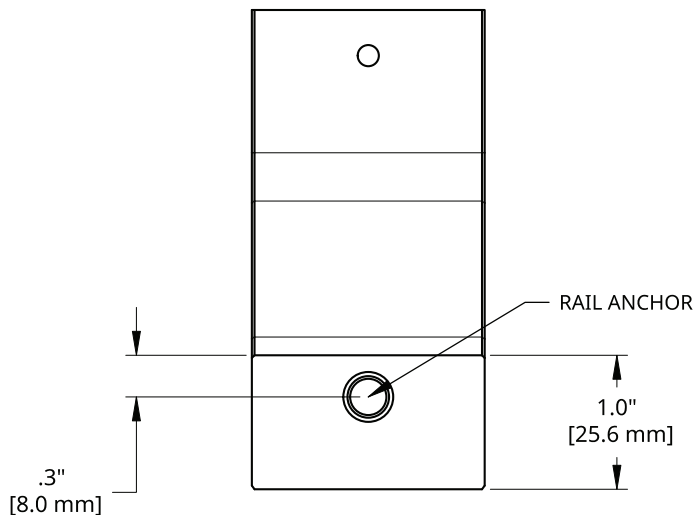

TOP VIEW

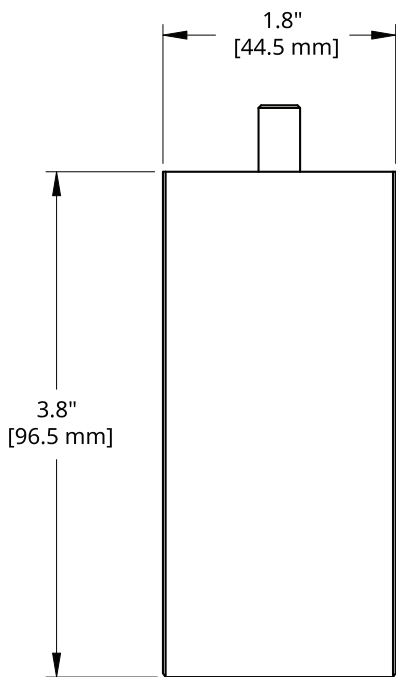

FRONT VIEW

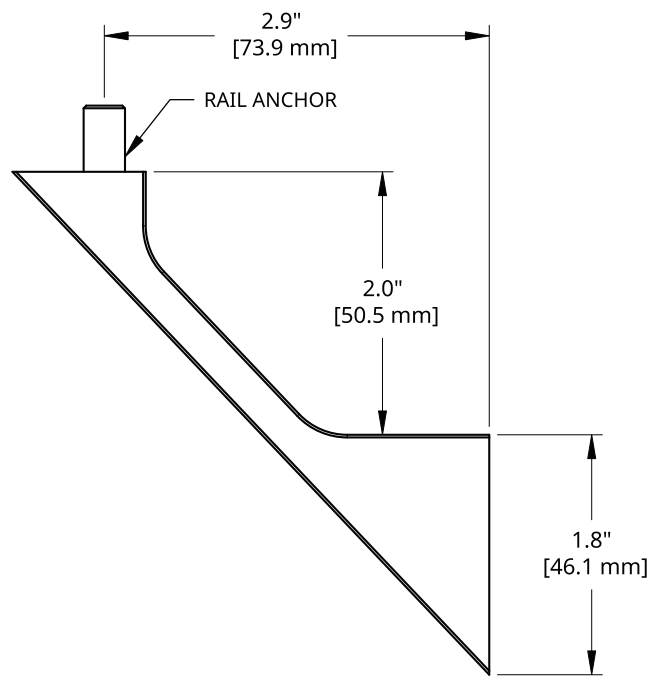

SIDE VIEW

VS Series, designed and manufactured by componance. For technical information, CAD drawings or related materials, please visit: www.componance.com or contact an authorized componance dealer. All information subject to change. Line drawings are not plotted to scale, for scaled drawings please inquire or download the drawings in CAD format.

componance.com
info@componance.com
+1.604.771.5128

VS SERIES

GLASS MOUNTED HANDRAIL BRACKET



SPEC

VS-GLASS-(COLOUR)




NOTES

Application	Glass Mounted
Material	304 Stainless Steel
Finish	Brushed or Powder Coated
Colours	Black, White, Stainless
Use	Interior & Exterior
Projection	3" / 76mm
Spacing	36"-48" o.c. / 914-1220mm
Hardware	Included

Use with rail with flat bottom. 3/4" / 19mm Diameter holes in glass required.. All hardware included.

VS Series, designed and manufactured by componance. For technical information, CAD drawings or related materials, please visit: www.componance.com or contact an authorized componance dealer. All information subject to change. Line drawings are not plotted to scale, for scaled drawings please inquire or download the drawings in CAD format.

componance.com
info@componance.com
+1.604.771.5128

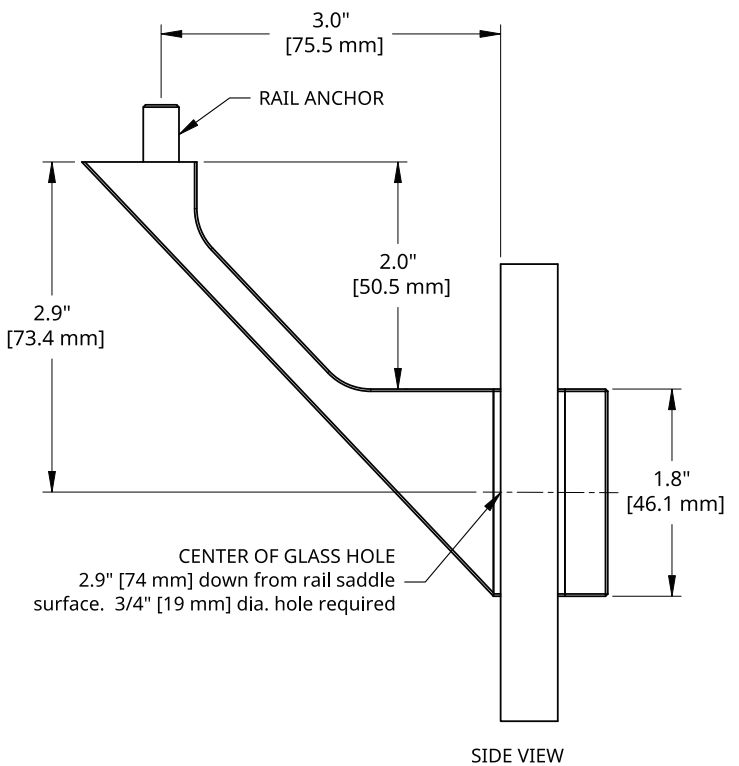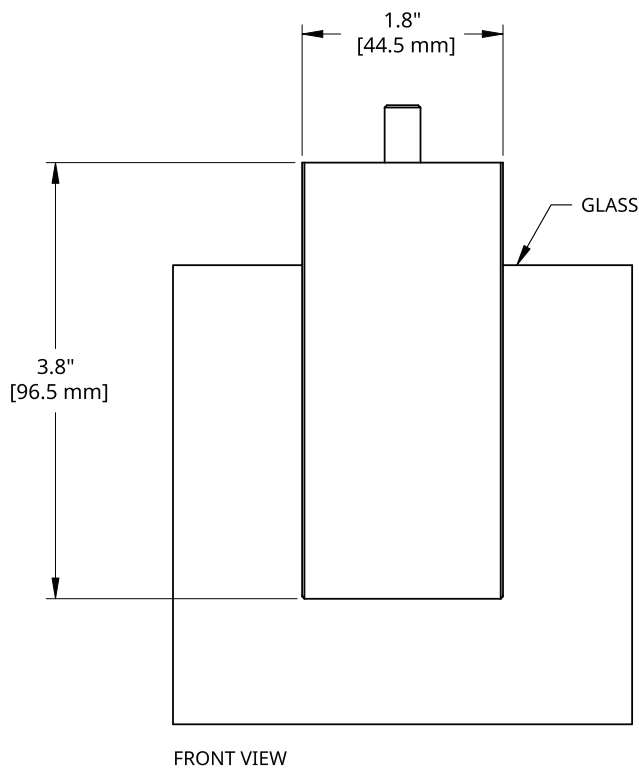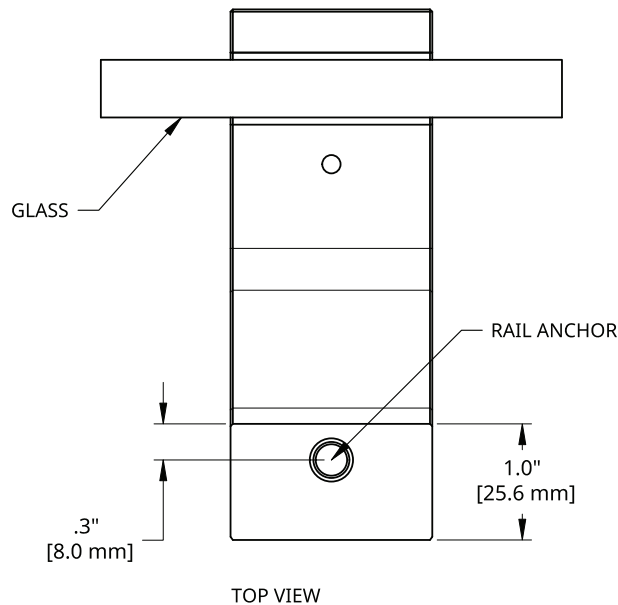

NOTES

Specification: VS-GLASS-(COLOUR)

3/4" / 19mm Diameter hole in glass required.

Glass thickness should be specified when ordering

Rail must be flat on the bottom where it comes in contact with the bracket. 1.8" W x 1" D / 45mm x 26mm min.

Can be used with solid metal and wood rails.
For hollow metal rails, please inquire.

For technical installation, product specs, maintenance and more specific questions, please contact info@componance.com or call +1.604.771.5128